



Report Title:

Grassy Mountain Project
Oregon, USA
NI 43-101 Technical Report on Feasibility Study

Prepared for:

Paramount Gold Nevada Corp.



Prepared by:

Mr. Tommaso Roberto Raponi, P. Eng., Ausenco
Mr. Michael Gustin, CPG., MDA
Mr. Joseph Seamons, P.Eng., MDA
Mr. Richard DeLong, MMSA QP, EM Strategies
Mr. Christopher MacMahon, P.E., Golder
Mr. Leonardo Palma, RM CMC, GMS

Report effective date:

15 September 2020

CERTIFICATE of QUALIFIED PERSON

I, Tommaso Roberto Raponi, P. Eng., am employed as a Principal Metallurgist with Ausenco Canada Inc. (Ausenco), with an address at 11 King St West, Suite 1550, Toronto, ON, M5H 4C7.

This certificate applies to the technical report titled “Grassy Mountain Project, Oregon, USA, NI 43-101 Technical Report on Feasibility Study” that has an effective date of 15 September, 2020 (the “technical report”).

I am a registered as a Professional Engineer (P.Eng.) with the Professional Engineers Ontario (No. 90225970) and with Engineers and Geoscientists BC (No. 23536). I graduated from the University of Toronto, Toronto, Ontario, Canada in 1984 with a Bachelor's degree in Geological Engineering.

I have worked as an independent consultant since 2016. My relevant experience is over 36 years of experience in the development, design, operation and commissioning of mineral processing plants, focusing on gold projects. As a result of my experience and qualifications, I am a Qualified Person as defined in National Instrument 43–101 *Standards of Disclosure for Mineral Projects* (NI 43–101) for those sections of the technical report that I am responsible for.

I visited the Grassy Mountain Project on 15 August, 2019 for a site visit duration of one day.

I am responsible for Sections 1.1, 1.2, 1.9, 1.15, 1.16.1, 1.16.5, 1.18, 1.19, 1.20, 1.21, 1.22, 1.23.1.1, 1.23.1.3, 1.23.1.5, 1.23.1.6, 1.23.2.2, 1.23.2.3, 1.24, 1.25.1, 1.25.4; Sections 2.1, 2.2, 2.3, 2.4, 2.5, 2.6; Section 3; Section 13; Section 17; Sections 18.1, 18.2, 18.6.2, 18.7, 18.8, 18.9; Section 19; Sections 21.1.1, 21.1.2, 21.1.3, 21.1.4, 21.1.5, 21.1.6, 21.1.7, 21.1.8, 21.1.10, 21.1.11.2, 21.1.12, 21.1.13, 21.1.14, 21.2.1, 21.2.3, 21.2.4; Section 22; Section 24; Sections 25.1, 25.5, 25.9, 25.10.1, 25.10.2, 25.10.6, 25.12, 25.13, 25.14, 25.15, 25.16.1.1, 25.16.1.3, 25.16.1.5, 25.16.1.6, 25.16.2.2, 25.16.2.3, 25.17; Sections 26.1, 26.4; and Section 27 of the technical report.

I am independent of Paramount Nevada Gold Corp. as independence is described by Section 1.5 of NI 43–101.

I have been involved with the Grassy Mountain Project since 2018, and co-authored the following technical report on the project:

- Gustin, M.M., Dyer, T.L., MacMahon, C., Caro, B., Raponi, T.R., and Baldwin, D., 2018: Preliminary Feasibility Study and Technical Report for the Grassy Mountain Gold and Silver Project, Malheur County, Oregon, USA: report prepared by Mine Development Associates, Golder Associates and Ausenco Canada Inc. for Paramount Gold Nevada Corp., effective date 21 May, 2018.

I have read NI 43–101 and the sections of the technical report for which I am responsible have been prepared in compliance with that Instrument.

As of the effective date of the technical report, to the best of my knowledge, information and belief, the sections of the technical report for which I am responsible contain all scientific and technical information that is required to be disclosed to make the technical report not misleading.

Dated: 29 October, 2020

“Signed and sealed”

Tommaso Roberto Raponi, P. Eng.



MINE DEVELOPMENT ASSOCIATES

A Division of **RESPEC**

CERTIFICATE of QUALIFIED PERSON

I, Dr Michael Gustin, CPG., am employed as a Senior Geologist with Mine Development Associates, Inc., a RESPEC company, with an address at 210 South Rock Blvd., Reno, Nevada 89502.

This certificate applies to the technical report titled “Grassy Mountain Project, Oregon, USA, NI 43-101 Technical Report on Feasibility Study” that has an effective date of 15 September, 2020 (the “technical report”).

I am a Certified Professional Geologist of the American Institute of Professional Geologists (#CPG-11462). I am also a Licensed Professional Geologist in the state of Utah (#5541396-2250), a Licensed Geologist in the state of Washington (# 2297), and a Registered Member of the Society of Mining, Metallurgy and Exploration (RMSME, #4037854RM). I graduated from Northeastern University, Massachusetts, in 1979 with a Bachelor of Science degree in Geology. I obtained a Doctor of Philosophy degree in Economic Geology from the University of Arizona in 1990.

I have practiced my profession for more than 35 years. I have been directly involved in the exploration, drilling, and resource modeling of numerous volcanic-hosted epithermal gold-silver deposits similar to the Grassy Mountain deposit in my career.

As a result of my experience and qualifications, I am a Qualified Person as defined in National Instrument 43–101 *Standards of Disclosure for Mineral Projects* (NI 43–101) for those sections of the technical report that I am responsible for.

I visited the Grassy Mountain Project most recently on June 1, 2018, for a site visit duration of one day.

I am responsible for Sections 1.1, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.10, 1.11, 1.25.1, 1.25.6; Section 2; Section 3; Sections 4.1, 4.2, 4.3, 4.6, 4.7, 4.8; Section 5; Section 6; Section 7; Section 8; Section 9; Section 10; Section 11; Section 12; Section 14; Section 23; Sections 25.1, 25.2, 25.3, 25.4, 25.6; Sections 26.1, 26.6; Section 27; and Appendix A of the technical report.

I am independent of Paramount Nevada Gold Corp. as independence is described by Section 1.5 of NI 43–101.

I have been involved with the Grassy Mountain Project since 2017, and co-authored the following technical report on the project:

775-856-5700

210 South Rock Blvd.
Reno, Nevada 89502
FAX: 775-856-6053



- Gustin, M.M., Dyer, T.L., MacMahon, C., Caro, B., Raponi, T.R., and Baldwin, D., 2018: Preliminary Feasibility Study and Technical Report for the Grassy Mountain Gold and Silver Project, Malheur County, Oregon, USA: report prepared by Mine Development Associates, Golder Associates and Ausenco Canada Inc. for Paramount Gold Nevada Corp., effective date 21 May, 2018.

I have read NI 43–101 and the sections of the technical report for which I am responsible have been prepared in compliance with that Instrument.

As of the effective date of the technical report, to the best of my knowledge, information and belief, the sections of the technical report for which I am responsible contain all scientific and technical information that is required to be disclosed to make the technical report not misleading.

Dated: 29 October, 2020

/s/ “Michael Gustin”

Dr Michael Gustin, CPG.



MINE DEVELOPMENT ASSOCIATES
A Division of **RESPEC**

CERTIFICATE of QUALIFIED PERSON

I, Joseph Seamons, P.Eng., am employed as a Senior Staff Engineer with Mine Development Associates Inc., a division of RESPEC, with an address at 210 South Rock Blvd, Reno, NV 89502.

This certificate applies to the technical report titled “Grassy Mountain Project, Oregon, USA, NI 43-101 Technical Report on Feasibility Study” that has an effective date of 15 September, 2020 (the “technical report”).

I am a Professional Engineer of Nevada Board of Professional Engineers & Land Surveyors; #025482. I graduated from the University of Utah with a degree in Mining Engineering in 2011.

I have practiced my profession for 9 years. I have been directly involved in underground mine design, underground scheduling, and underground cut and fill mining operations.

As a result of my experience and qualifications, I am a Qualified Person as defined in National Instrument 43–101 Standards of Disclosure for Mineral Projects (NI 43–101) for those sections of the technical report that I am responsible for.

I visited the Grassy Mountain Project on 15 August, 2019, for a site visit duration of a day.

I am responsible for Sections 1.1, 1.12, 1.13, 1.14.1, 1.14.3, 1.16.2, 1.19, 1.20, 1.23.2.1, 1.25.1, 1.25.2; Sections 2.1, 2.2, 2.3, 2.4, 2.5; Section 3; Section 15; Sections 16.1, 16.6, 16.7, 16.8, 16.9.1, 16.9.2, 16.9.3, 16.9.4, 16.9.5, 16.9.7, 16.9.8, 16.10, 16.11, 16.12; Sections 21.1.1, 21.1.3, 21.1.9, 21.2.1, 21.2.2; Sections 25.1, 25.7, 25.8.1, 25.10.3, 25.13, 25.14, 25.16.1.2, 25.16.2.3; Sections 26.1, 26.2; and Section 27 of the technical report.

I am independent of Paramount Nevada Gold Corp. as independence is described by Section 1.5 of NI 43–101.

I have had no previous involvement with the Grassy Mountain Project.

775-856-5700

210 South Rock Blvd.
Reno, Nevada 89502
FAX: 775-856-6053



I have read NI 43–101 and the sections of the technical report for which I am responsible have been prepared in compliance with that Instrument.

As of the effective date of the technical report, to the best of my knowledge, information and belief, the sections of the technical report for which I am responsible contain all scientific and technical information that is required to be disclosed to make the technical report not misleading.

Dated: 29 October, 2020

“Signed and sealed”

Joseph Seamons

Joseph Seamons, P.Eng.

775-856-5700

210 South Rock Blvd.
Reno, Nevada 89502
FAX: 775-856-6053



CERTIFICATE of QUALIFIED PERSON

I, Richard DeLong, MMSA QP, am employed as the President and a Senior Environmental Manager with EM Strategies, Inc., with an address at 1650 Meadow Wood Lane, Reno, Nevada 89511.

This certificate applies to the technical report titled “Grassy Mountain Project, Oregon, USA, NI 43-101 Technical Report on Feasibility Study” that has an effective date of 15 September, 2020 (the “technical report”).

I am a Qualified Professional with the Mining and Metallurgical Society of America (MMSA QP, # 01471QP). I graduated from The University of Idaho with a Master’s Degree in Resource Management in 1984 and a Master’s Degree in Geology in 1986.

I have practiced my profession for 34 years. I have been directly involved in the environmental review of mining projects and the permitting of mining projects throughout the western United States.

As a result of my experience and qualifications, I am a Qualified Person as defined in National Instrument 43–101 *Standards of Disclosure for Mineral Projects* (NI 43–101) for those sections of the technical report that I am responsible for.

I visited the Grassy Mountain Project for a one-day site visit between to period March 2016 and October 2017.

I am responsible for Sections 1.1, 1.17, 1.23.1.4; Sections 2.1, 2.2, 2.3, 2.6; Sections 4.4, 4.5; Section 20; Section 21.1.15; Sections 25.1, 25.11, 25.16.1.4; and Section 27 of the technical report.

I am independent of Paramount Gold Nevada Corp as independence is described by Section 1.5 of NI 43–101.

I have been involved with the Grassy Mountain Project since July 2016 assisting in the acquisition of environmental baseline data and the preparation of permit applications.

I have read NI 43–101 and the sections of the technical report for which I am responsible have been prepared in compliance with that Instrument.

EM Strategies, Inc. 1650 Meadow Wood Lane Reno, Nevada 89502 775.826.8822	www.emstrats.com
--	--



As of the effective date of the technical report, to the best of my knowledge, information and belief, the sections of the technical report for which I am responsible contain all scientific and technical information that is required to be disclosed to make the technical report not misleading.

Dated: 29 October, 2020

“Signed and sealed”

Richard DeLong, MMSA QP.

EM Strategies, Inc. 1650 Meadow Wood Lane Reno, Nevada 89502 775.826.8822	www.emstrats.com
--	--

CERTIFICATE OF QUALIFIED PERSON – Christopher Jason MacMahon

I, Christopher Jason MacMahon, PE (Oregon) state that:

- (a) I am an Associate and Senior Engineer at:
Golder Associates Inc.
595 Double Eagle Court, Suite 1000
Reno, Nevada 89521 USA
- (b) This certificate applies to the technical report titled “Grassy Mountain Project, Oregon, USA, NI 43-101 Technical Report on Feasibility Study” with an effective date of 15 September 2020.
- (c) For those sections of the technical report that I am responsible for, I am a “qualified person” for the purposes of National Instrument 43-101 (the “Instrument”). My qualifications as a qualified person are as follows: I am a graduate of the University of Nevada, Reno with a Bachelor of Science degree in Civil Engineering (2005). I am a registered professional Civil Engineer in Nevada and Oregon, USA. My relevant experience after graduation and over 12 years for the purpose of the Technical Report includes design of tailings storage and heap leach facilities, and other process and waste containment facilities.
- (d) My most recent personal inspection of each property described in the Technical Report occurred on August 17 and 18, 2016 and was for a duration of 2 days.
- (d) I am responsible for Items 1.1, 1.16.2, 1.16.3, 1.16.4, 1.23.1.3, 1.25.1, 1.25.3; Items 2.1, 2.2, 2.3, 2.4, 2.6; Items 18.3, 18.5, 18.6.1; Item 21.1.11.1; Items 25.1, 25.10.3, 25.10.4, 25.10.5, 25.16.1.3; Items 26.1, 26.3; and Item 27 of the Technical Report.
- (e) I am independent of the Paramount Nevada Gold Corp. (issuer) as described in section 1.5 of the Instrument.
- (f) My prior involvement with the property that is the subject of the Technical Report is as follows.
 - Report titled “Pre-feasibility Design, Tailings Storage Facility, Grassy Mountain Project.” Report date June 29, 2018.
 - Preparation and contributions to Items 1.9.1, 18.4, 25.6, 25.11.1.2, 25.11.2.3, and 26.2.3, and for discussions in Items 2.1, 18.5.2, and 21.1.3 pertaining to the Tailings Storage Facility and Waste Rock Dump in the “Preliminary Feasibility Study and Technical Report for the Grassy Mountain Gold and Silver Project”, prepared for Paramount Gold Nevada Corp. Report date July 9, 2018.
 - Report titled “Detailed Design, Tailings Storage Facility and Waste Rock Dump, Grassy Mountain Mine.” Report date November 6, 2019.
- (g) I have read National Instrument 43-101. The part of the Technical Report for which I am responsible has been prepared in compliance with this Instrument; and
- (h) At the effective date of the Technical Report, to the best of my knowledge, information, and belief, the parts of Technical Report for which I am responsible, contains all scientific and technical information that is required to be disclosed to make the Technical Report not misleading.

Dated at Reno, Nevada, USA on the 29th of October 2020.

“Signed and sealed”

Christopher J. MacMahon, PE (OR)



CERTIFICATE of QUALIFIED PERSON

I, Leonardo Palma RM CMC, am employed as a Principal Mining Engineer with Geotechnical Mine Solutions, with an address at 128 office 503 Mardoqueo Fernandez Street, Providencia, Santiago de Chile.

This certificate applies to the technical report titled “Grassy Mountain Project, Oregon, USA, NI 43-101 Technical Report on Feasibility Study” that has an effective date of 15 September, 2020 (the “technical report”).

I am a Registered Member of the Comisión Calificadora de Competencias en Recursos y Reservas Mineras (Chilean Mining Commission; RM CMC). I graduated with a Bachelor of Engineering and Mining Engineering degree from Universidad de Santiago de Chile in 2002.

I have practiced my profession for 18 years. I have been directly involved in the development of engineering studies for both open pit and underground projects, leading, executing and coordinating multidisciplinary teams of professionals. In particular, I have participated in underground selective gold mining projects in Colombia, similar to the Grassy Mountain project. Therefore, I certify that due to my professional education and experience I meet the requirements for signing the report identified above.

This report has been worked in conjunction with Andres Torres, Technical Manager in Geotechnical Mine Solutions and Rodrigo Flores, Senior Consultant of Geotechnical Mine Solutions.

As a result of my experience and qualifications, I am a Qualified Person as defined in National Instrument 43–101 *Standards of Disclosure for Mineral Projects* (NI 43–101) for those sections of the technical report that I am responsible for.

I have not visited the Grassy Mountain project.

I am responsible for Sections 1.1, 1.14.2, 1.23.1.2, 1.25.1, 1.25.5; Sections 2.1, 2.2, 2.3, 2.6; Sections 16.2, 16.3, 16.4, 16.5, 16.9.6; Sections 25.1, 25.8.2, 25.16.1.2; Sections 26.1, 26.5; and Section 27 of the technical report.

I am independent of Paramount Gold Nevada Corp as independence is described by Section 1.5 of NI 43–101.

Geotechnical Mine Solutions 128 office 503 Mardoqueo Fernandez Street Providencia, Santiago de Chile Email: contacto@gms-engineering.cl	www.gms-engineering.cl
---	--



I have been involved with the pre-feasibility study of the Grassy Mountain project. I was responsible for the mining and geotechnical aspects (2018).

I have read NI 43–101 and the sections of the technical report for which I am responsible have been prepared in compliance with that Instrument.

As of the effective date of the technical report, to the best of my knowledge, information and belief, the sections of the technical report for which I am responsible contain all scientific and technical information that is required to be disclosed to make the technical report not misleading.

Dated: 29 October, 2020

“Signed”

Leonardo Palma, RM CMC

Important Notice

This report was prepared as National Instrument 43-101 Technical Report for Paramount Gold Nevada Corp. (Paramount) by Ausenco Engineering Canada Inc (Ausenco), Mine Development Associates Inc., a division of RESPEC (MDA), EM Strategies Inc. (EM Strategies), Golder Associates Inc. (Golder) and Geotechnical Mine Solutions (GMS) (collectively the Report Authors). The quality of information, conclusions, and estimates contained herein is consistent with the level of effort involved in the Report Author's services, based on i) information available at the time of preparation, ii) data supplied by outside sources, and iii) the assumptions, conditions, and qualifications set forth in this report. This report is intended for use by Paramount subject to terms and conditions of its contracts with each of the Report Authors. Except for the purposes legislated under Canadian provincial and territorial securities law, any other uses of this report by any third party is at that party's sole risk.

Table of Contents

1	SUMMARY.....	18
1.1	Introduction	18
1.2	Terms of Reference	18
1.3	Project Setting.....	18
1.4	Mineral Tenure, Surface Rights, Water Rights, Royalties and Agreements.....	19
1.5	Geology and Mineralization	20
1.6	History	20
1.7	Drilling and Sampling.....	21
1.8	Data Verification.....	22
1.9	Mineral Processing and Metallurgical Testing	23
1.10	Mineral Resource Estimation	24
1.11	Mineral Resource Statement	25
1.12	Mineral Reserve Estimates	26
1.13	Mineral Reserve Statement	27
1.14	Mining Methods.....	27
1.14.1	Overview	27
1.14.2	Geotechnical Considerations.....	28
1.14.3	Mine Design	28
1.15	Recovery Methods	29
1.16	Project Infrastructure.....	30
1.16.1	Infrastructure.....	30
1.16.2	Waste Rock Storage Facilities and Borrow Pits	30
1.16.3	Tailings Storage Facility.....	30
1.16.4	Water Management	31
1.16.5	Water Balance	31
1.17	Environmental Studies, Permitting, and Social or Community Impact	31
1.17.1	Overview	31
1.17.2	Environmental Considerations.....	31
1.17.3	Closure and Reclamation.....	32
1.17.4	Permitting Considerations.....	32
1.17.5	Social Considerations	33
1.18	Markets and Contracts.....	33
1.19	Capital Costs.....	34
1.20	Operating Costs	34
1.21	Economic Analysis	34
1.22	Sensitivity Analysis	37
1.23	Risks and Opportunities.....	37
1.23.1	Risks	37
1.23.1.1	Project Setting.....	37
1.23.1.2	Mining.....	37
1.23.1.3	Infrastructure	38
1.23.1.4	Environmental, Permitting and Social.....	38
1.23.1.5	Economic Analysis	39
1.23.1.6	Operational Readiness	39
1.23.2	Opportunities.....	39
1.23.2.1	Mining.....	39
1.23.2.2	Infrastructure	39
1.23.2.3	Capital and Operating Costs.....	39
1.24	Interpretation and Conclusions	39
1.25	Recommendations	39
1.25.1	Introduction	39
1.25.2	Mining.....	40

1.25.3	Tailings Storage Facility and Borrow Pits	40
1.25.4	Hydrology	40
1.25.5	Geotechnical	40
1.25.6	Resource Model	41
2	INTRODUCTION	42
2.1	Introduction	42
2.2	Terms of Reference	42
2.3	Qualified Persons.....	42
2.4	Site Visits and Scope of Personal Inspection	43
2.5	Effective Dates.....	44
2.6	Information Sources and References	44
2.7	Previous Technical Reports.....	44
3	RELIANCE ON OTHER EXPERTS.....	45
3.1	Introduction	45
3.2	Legal Matters	45
4	PROPERTY DESCRIPTION AND LOCATION.....	46
4.1	Introduction	46
4.2	Mineral Tenure	47
4.2.1	Mineral Concession Payment Terms.....	47
4.2.2	Land Access and Ownership Agreements.....	47
4.2.3	Seabridge Gold Corporation	47
4.2.4	Sherry and Yates	47
4.2.5	Cryla LLC	47
4.2.6	Nevada Select Royalty, Inc.....	49
4.3	Royalties	50
4.3.1	Seabridge Gold	50
4.3.2	Sherry and Yates	50
4.3.3	Cryla.....	50
4.3.4	Nevada Select Royalty Inc.....	51
4.4	Environmental Liabilities	51
4.5	Environmental Permitting.....	51
4.6	Surface Rights	51
4.7	Water Rights	51
4.8	Summary Statement	52
5	ACCESSIBILITY, CLIMATE, LOCAL RESOURCES, INFRASTRUCTURE, AND PHYSIOGRAPHY	53
5.1	Access.....	53
5.2	Physiography	55
5.3	Climate.....	55
5.4	Water Supply.....	56
5.5	Power	56
5.6	Infrastructure	56
5.7	Community Services	56
6	HISTORY	58
6.1	Introduction	58
6.2	1986–1996 Exploration History.....	58
6.2.1	Atlas 1986–1992 (Grassy Mountain Claims Group).....	58
6.2.2	Western Mining Corp. 1989–1990 (Frost Claims Group).....	59
6.2.3	Golden Predator Mines 2009–2017 (Frost Area Claims Group)	59
6.2.4	Newmont 1992–1996 (Grassy Mountain Claims Group).....	59
6.2.5	1996 Exploration at Outlying Targets within the Grassy Mountain Claims Group.....	60
6.2.6	Wheatgrass	60
6.2.7	North Spur.....	61

6.2.8	Crabgrass.....	61
6.2.9	Bluegrass and North Bluegrass	61
6.2.10	Snake Flats	61
6.2.11	Wood.....	61
6.2.12	Wally	61
6.2.13	Ryegrass	61
6.2.14	Clover.....	62
6.2.15	Bunchgrass	62
6.2.16	Sweetgrass	62
6.3	1998–2016 Exploration	62
6.3.1	Tombstone 1998	62
6.3.2	Seabridge 2000–2010.....	62
6.3.3	Calico 2011–2016	62
6.4	Historical Mineral Resource Estimates	64
6.5	Production	64
7	GEOLOGICAL SETTING AND MINERALIZATION	65
7.1	Introduction	65
7.2	Regional Geologic Setting	65
7.3	Local and Property Geology	65
7.4	Grassy Mountain Deposit.....	68
7.4.1	Geology.....	68
7.4.2	Structure.....	69
7.4.3	Alteration and Mineralization.....	70
7.4.3.1	Central Higher-Grade Core Zone	70
7.4.3.2	Lower-Grade Envelope	71
7.5	Frost Area Claims Group	72
8	DEPOSIT TYPES	74
9	EXPLORATION	75
10	DRILLING	79
10.1	Introduction	79
10.2	Historical Drilling 1987–2012	83
10.2.1	Atlas 1987–1992	83
10.2.2	Newmont 1994.....	83
10.2.3	Tombstone 1998	84
10.2.4	Calico 2011–2012	84
10.2.5	Paramount 2016–2019	85
10.3	Drill-Hole Collar and Down-Hole Surveys.....	87
10.4	Sample Quality.....	88
10.4.1	Core Samples	88
10.4.2	RC Samples.....	90
10.5	Summary Statement	91
11	SAMPLE PREPARATION, ANALYSES, AND SECURITY	92
11.1	Introduction	92
11.2	Sample Preparation, Analysis and Security.....	92
11.2.1	Atlas 1987–1992	92
11.2.2	Newmont 1992–1996.....	92
11.2.3	Tombstone 1998	93
11.2.4	Calico 2011–2012	93
11.2.5	Paramount 2016–2019	94
11.3	Quality Assurance/Quality Control Procedures	95
11.3.1	Atlas QA/QC 1987–1992	95
11.3.2	Newmont QA/QC 1992–1996	95
11.3.3	Tombstone QA/QC 1998	96

11.3.4	Calico QA/QC 2011–2012	96
11.3.5	Paramount QA/QC 2016–2019.....	97
11.4	Quality Assurance/Quality Control Results	98
11.4.1	Atlas 1987–1992	98
11.4.1.1	Preparation Duplicates.....	98
11.4.1.2	RC Field Duplicates	100
11.4.1.3	Miscellaneous QA/QC Samples	100
11.4.2	Newmont 1992–1996.....	101
11.4.2.1	Preparation Duplicates.....	101
11.4.2.2	Core Field Duplicates.....	102
11.4.2.3	Miscellaneous QA/QC Samples	103
11.4.3	Tombstone 1998	104
11.4.3.1	Replicate Analyses	104
11.4.3.2	Preparation Duplicates.....	104
11.4.3.3	Miscellaneous QA/QC Samples	105
11.4.4	Calico 2011–2012	105
11.4.4.1	CRMs	105
11.4.4.2	Coarse Blanks.....	106
11.4.4.3	Analytical Blanks.....	107
11.4.4.4	Field Duplicates	107
11.4.4.5	Pulp-Checks.....	107
11.4.5	Paramount 2016–2017	107
11.4.5.1	Certified Reference Materials	107
11.4.5.2	Pulp Checks.....	107
11.4.5.3	Coarse Blanks.....	108
11.4.5.4	Preparation Duplicates.....	109
11.4.5.5	Core Field Duplicates.....	110
11.4.5.6	RC Field Duplicates	112
11.4.6	Paramount 2018–2019	113
11.4.7	Discussion of QA/QC Results	113
11.5	Summary Statement	114
12	DATA VERIFICATION.....	115
12.1	Drill-Hole Data Verification.....	115
12.2	Collar Data	115
12.3	Down-Hole Survey Data	115
12.4	Assay Data.....	116
12.5	Site Inspections.....	116
12.6	Summary Statement	117
13	MINERAL PROCESSING AND METALLURGICAL TESTING.....	118
13.1	Introduction	118
13.2	Historical Testwork Programs	118
13.2.1	Historical Studies 1989 to 2012	118
13.2.2	Historical Testwork from 2018 PFS	118
13.2.2.1	2018 PFS Sample Selection	118
13.2.2.2	2018 PFS Testwork Scope	119
13.3	2020 FS Testwork.....	119
13.3.1	Objectives	119
13.3.2	SGS Testwork Program 15944-02 Scope of Work.....	119
13.3.3	McClelland Testwork Program MLI 4551 Scope of Work.....	119
13.3.4	Sample Selection for SGS Program 15944-02.....	119
13.3.5	Sample Selection for McClelland Program MLI 4551.....	119
13.4	Presentation and Discussion of Results	121
13.4.1	Ore Characterization and Deleterious Elements	121
13.4.2	Comminution Test Results.....	121

13.4.2.1	Hazen 1989	121
13.4.2.2	SGS Program 15944-001	122
13.4.2.3	SGS Program 15944-02	122
13.4.3	Mineralogical Analysis	123
13.4.3.1	Hazen 1990	123
13.4.3.2	SGS Program 15944-02	123
13.4.4	Leach Tests.....	124
13.4.4.1	Evaluation of Grind Size, SGS Program 15944-02.....	124
13.4.4.2	Evaluation of Leach Time, SGS Program 15944-001	124
13.4.4.3	Evaluation of Leach Time, SGS Program 15944-02.....	125
13.4.4.4	Evaluation of Leach Time, McClelland Program MLI 4551	125
13.4.4.5	Effect of Pre-aeration, SGS Program 15944-02	127
13.4.4.6	Leach Reagent Consumption, SGS Program 15944-001, SGS Program 15944-02 and McClelland Program MLI 4551	127
13.4.4.7	Oxygen Uptake Test, SGS Program 15944-02	127
13.4.4.8	Mercury Dissolution Test, SGS Program 15944-02.....	127
13.4.5	Cyanide Destruction.....	128
13.4.5.1	Historical Results	128
13.4.5.2	SGS Program 15944-02 Results	128
13.5	Recovery Estimation	128
13.5.1	Leach Recovery, SGS Program 15944-001, SGS Program 15944-02 and McClelland Program MLI 4551	128
13.5.1.1	Leach Recovery Estimate	132
13.5.1.2	Estimation of Plant Losses.....	134
13.5.1.3	Overall Recovery Estimate	135
13.6	Conclusions.....	135
13.7	Summary Statement	135
14	MINERAL RESOURCE ESTIMATES	136
14.1	Introduction	136
14.2	Grassy Mountain Project Data	136
14.2.1	Drill-Hole Database	136
14.2.2	Topography	136
14.3	Deposit Geology Relevant to Resource Modeling	136
14.4	Geologic Modeling	137
14.5	Water Table and Oxidation Modeling	137
14.6	Density Modeling	138
14.7	Gold and Silver Modeling.....	139
14.7.1	Mineral Domains	139
14.7.2	Assay Coding, Capping, and Compositing	145
14.7.3	Block Model Coding	146
14.7.4	Grade Interpolation	147
14.7.5	Model Checks	149
14.8	Grassy Mountain Mineral Resource Estimates.....	149
14.9	Comments on the Resource Modeling	156
15	MINERAL RESERVE ESTIMATES.....	158
15.1	Introduction	158
15.1.1	2014 CIM Definition Standards.....	158
15.1.1.1	Mineral Reserve	158
15.1.1.2	Probable Mineral Reserve	159
15.1.1.3	Proven Mineral Reserve	159
15.1.1.4	Modifying Factors.....	159
15.1.2	Estimation Procedure.....	159
15.2	Mineral Reserve Statement	159
15.3	Economic Cut-off Grade Calculation	160

15.4	Stope Design	161
15.5	Dilution and Recovery	162
15.5.1	External Dilution	162
15.5.2	Internal Dilution	164
15.5.3	Mining Recovery	164
15.6	Discussion of Mineral Reserves.....	164
16	MINING METHODS	165
16.1	Mining Method Selection.....	165
16.1.1	Mechanized Cut-and-fill Mining.....	165
16.1.2	Mining Method Sequence	168
16.2	Geotechnical Analysis.....	169
16.2.1	Overview	169
16.2.1.1	Degradation Zones	170
16.2.1.2	Structural Fabric.....	170
16.2.1.3	In-situ Stress	171
16.2.2	Geotechnical Characterization.....	171
16.2.3	Golder Geotechnical Appraisal	171
16.2.4	Ausenco Geotechnical Work.....	173
16.2.5	2020 Feasibility Study Geotechnical Analysis	175
16.2.6	Intact Rock Strength	177
16.2.7	Geotechnical Model	178
16.2.8	Summary of Geotechnical Analysis and Evaluation for Underground Mining.....	181
16.3	Excavation Design	181
16.3.1	Mining Method Selection.....	181
16.3.2	Drift Sizes and Stability Assessments	182
16.4	Numerical Modelling	184
16.4.1	Ground Support	190
16.4.2	Ground Monitoring Program	191
16.4.3	Global Extraction Sequence	192
16.5	Portal Design.....	192
16.6	Grade Control	193
16.7	Development Design.....	193
16.7.1	Mine Design Parameters	193
16.7.2	Level Access	194
16.7.3	Station Design.....	195
16.8	Equipment Selection	196
16.9	Production and Development Productivity Assumptions	197
16.9.1	Drilling and Bolting	197
16.9.2	Shotcrete.....	198
16.9.3	Blasting	201
16.9.4	Mucking.....	203
16.9.5	Hauling.....	204
16.9.6	Backfilling.....	206
16.9.7	Backfill Plant.....	209
16.9.8	Production Scheduling.....	210
16.10	Underground Infrastructure and Services.....	211
16.10.1	Ventilation	211
16.10.2	Underground Dewatering.....	214
16.10.3	Underground Power.....	216
16.10.4	Underground Communications	216
16.10.5	Underground Refuge and Escape Ways	216
16.11	Mining Costs	217
16.12	Life-of-Mine Production.....	217
17	RECOVERY METHODS.....	223

17.1	Introduction	223
17.2	Process Design Criteria	223
17.3	Process Flowsheet Development	225
17.4	Overall Process Description.....	228
17.4.1	Crushing Circuit	228
17.4.2	Grinding Circuit	229
17.4.3	CIL Leaching.....	229
17.4.4	Carbon Management	230
17.4.4.1	Acid Wash	230
17.4.4.2	Carbon Elution	230
17.4.4.3	Carbon Regeneration.....	230
17.4.4.4	Carbon Transport Water	231
17.4.5	Gold Room	231
17.4.6	Cyanide Detoxification and Tailings Deposition.....	231
17.4.7	Reagent Handling and Storage	231
17.4.7.1	Hydrated Lime.....	232
17.4.7.2	Sodium Cyanide.....	232
17.4.7.3	Sodium Hydroxide.....	232
17.4.7.4	Sodium Metabisulfite.....	232
17.4.7.5	Copper Sulfate	233
17.4.7.6	Hydrochloric Acid	233
17.4.8	Air Supply and Distribution.....	233
17.4.8.1	Low-Pressure Air	233
17.4.8.2	Plant and Instrument Air	233
17.4.9	Water Supply and Distribution	233
17.4.9.1	Raw Water	233
17.4.9.2	Potable Water	234
17.4.9.3	Gland Water.....	234
17.4.9.4	Process Water	234
17.5	Sampling and Metallurgical Laboratory	234
17.6	Projected Energy Requirements.....	234
17.7	Project Water Requirements.....	234
18	PROJECT INFRASTRUCTURE.....	235
18.1	Introduction	235
18.2	Access.....	237
18.3	Waste Rock Storage Facility.....	237
18.4	Borrow Pit.....	237
18.5	Tailings Storage Facility.....	238
18.5.1	Design	238
18.5.2	Monitoring	240
18.5.3	Closure.....	240
18.6	Water Management	241
18.6.1	Contact and Non-Contact Water Management.....	241
18.6.2	Water Balance	246
18.7	Built Infrastructure.....	247
18.8	Camps and Accommodation.....	249
18.9	Power and Electrical	249
19	MARKET STUDIES AND CONTRACTS	250
19.1	Introduction	250
19.2	Market Studies	250
19.3	Metal Pricing and Projections	250
19.3.1	Economic Analysis.....	250
19.3.2	Metal Pricing Forecasts	251
19.4	Contracts.....	253

19.5	QP Comment	253
20	ENVIRONMENTAL STUDIES, PERMITTING, AND SOCIAL OR COMMUNITY IMPACT	254
20.1	Introduction	254
20.2	Permit History.....	254
20.3	Project Permits.....	255
20.3.1	State of Oregon Permit Processing	255
20.3.2	Federal Plan of Operations Processing.....	257
20.3.3	National Environmental Policy Act.....	258
20.3.4	Malheur County Permit Processing	258
20.4	Environmental Study Results and Known Issues	258
20.4.1	Baseline Studies	258
20.4.2	Geochemical Characterization and Groundwater Studies.....	259
20.5	Waste Disposal, Monitoring, Water Management	261
20.6	Social and Community Issues.....	261
20.7	Closure.....	261
20.8	Environmental and Permitting Risks and Opportunities	261
21	CAPITAL AND OPERATING COSTS.....	263
21.1	Capital Cost Estimate	263
21.1.1	Introduction	263
21.1.2	Project Execution	264
21.1.3	Estimate Summary.....	265
21.1.4	Sustaining Capital Cost Estimate	266
21.1.5	Definition of Costs.....	266
21.1.6	Methodology.....	267
21.1.7	Exchange Rates.....	267
21.1.8	Market Availability	267
21.1.9	Mining Capital Cost Estimate.....	267
21.1.9.1	Underground Capital Costs.....	267
21.1.9.2	Underground Labor	269
21.1.9.3	Initial Mining Cost Summary	270
21.1.10	Processing and Overall Site Infrastructure Capital Cost Estimate	271
21.1.10.1	Direct Costs.....	271
21.1.10.2	Direct Man-Hours	272
21.1.10.3	Labor Productivity.....	273
21.1.10.4	Contractor Labor Rates	273
21.1.10.5	Contractor Distributable Costs	273
21.1.10.6	Earthworks & Site Preparation	273
21.1.10.7	Concrete Supply & Installation	274
21.1.10.8	Structural Steel.....	274
21.1.10.9	Architectural.....	274
21.1.10.10	Mechanical Equipment	274
21.1.10.11	Platwork.....	275
21.1.10.12	Process Plant Piping	275
21.1.10.13	Fire Protection and Detection Piping.....	275
21.1.10.14	Water Supply and Distribution.....	275
21.1.10.15	Pipelines	275
21.1.10.16	Electrical Equipment.....	275
21.1.10.17	Electrical Bulks	276
21.1.10.18	Instrumentation and Control	276
21.1.10.19	Mobile Equipment.....	276
21.1.10.20	Freight Costs	276
21.1.10.21	Import Duties	276
21.1.11	Tailings Storage and Waste Rock Dump Facilities Capital Cost Estimate	277
21.1.11.1	Material Take-off and Bid Solicitation.....	277

21.1.11.2	Cost Estimate	277
21.1.12	Indirect Capital Cost Estimate.....	277
21.1.12.1	Project Preliminaries (field indirects).....	277
21.1.12.2	Operational Spares	278
21.1.12.3	Capital (Insurance) and Commissioning Spares.....	278
21.1.12.4	First Fills	278
21.1.12.5	Vendors	278
21.1.12.6	Pre-commissioning, Commissioning	278
21.1.12.7	Construction Camp and Catering	278
21.1.12.8	EPCM	279
21.1.13	Owners Costs.....	279
21.1.14	Contingency	279
21.1.14.1	Estimate Contingency	279
21.1.14.2	Contingency Analysis	279
21.1.14.3	Management Reserve Analysis.....	279
21.1.14.4	Escalation.....	280
21.1.15	Reclamation and Closure Capital Cost Estimate.....	280
21.2	Operating Cost Estimate.....	280
21.2.1	Basis of Operating Cost Estimate.....	280
21.2.2	Mining Operating Cost Estimate	280
21.2.2.1	Costs Applied to Mine Plan Physicals	281
21.2.2.2	Underground Labor	281
21.2.2.3	Other Underground Costs.....	282
21.2.3	Process Operating Cost Estimate.....	282
21.2.3.1	Reagents and Operating Consumables.....	283
21.2.3.2	Maintenance.....	283
21.2.3.3	Power	283
21.2.3.4	Mobile Equipment	283
21.2.3.5	Labor	283
21.2.4	General and Administrative Operating Cost Estimate	283
22	ECONOMIC ANALYSIS.....	285
22.1	Cautionary Statement Regarding Forward-Looking Information	285
22.2	Methodology Used	286
22.3	Financial Model Parameters	286
22.4	Taxes	286
22.5	Closure Costs & Salvage Value.....	287
22.6	Royalty	287
22.7	Economic Analysis.....	287
22.8	Sensitivity Analysis	292
23	ADJACENT PROPERTIES	295
24	OTHER RELEVANT DATA AND INFORMATION.....	296
25	INTERPRETATION AND CONCLUSIONS.....	297
25.1	Introduction	297
25.2	Mineral Tenure, Surface Rights, Water Rights, Royalties and Agreements.....	297
25.3	Geology and Mineralization	297
25.4	Exploration, Drilling and Analytical Data Collection in Support of Mineral Resource Estimation	298
25.5	Metallurgical Testwork	298
25.6	Mineral Resource Estimates	298
25.7	Mineral Reserve Estimates	299
25.8	Mine Plan	300
25.8.1	Mining Method	300
25.8.2	Geotechnical Considerations.....	300

25.9	Recovery Plan.....	301
25.10	Infrastructure.....	301
25.10.1	Key Infrastructure.....	301
25.10.2	Roads and Power.....	301
25.10.3	Waste Rock Storage and Borrow Pits.....	301
25.10.4	Tailings Storage Facility.....	301
25.10.5	Water Management.....	302
25.10.6	Water Supply.....	302
25.11	Environmental, Permitting and Social Considerations.....	302
25.12	Markets and Contracts.....	303
25.13	Capital Cost Estimates.....	303
25.14	Operating Cost Estimates.....	303
25.15	Economic Analysis.....	304
25.16	Risks and Opportunities.....	304
25.16.1	Risks.....	304
25.16.1.1	Project Setting.....	304
25.16.1.2	Mining.....	305
25.16.1.3	Infrastructure.....	305
25.16.1.4	Environmental, Permitting and Social.....	305
25.16.1.5	Economic Analysis.....	306
25.16.1.6	Operational Readiness.....	306
25.16.2	Opportunities.....	306
25.16.2.1	Mining.....	306
25.16.2.2	Infrastructure.....	306
25.16.2.3	Capital and Operating Costs.....	306
25.17	Conclusions.....	306
26	RECOMMENDATIONS.....	307
26.1	Introduction.....	307
26.2	Mining.....	307
26.3	Tailings Storage Facility and Borrow Pits.....	307
26.4	Hydrology.....	307
26.5	Geotechnical.....	307
26.6	Resource Model.....	310
27	REFERENCES.....	311

List of Tables

Table 1-1:	Mineral Resource Statement.....	26
Table 1-2:	Mineral Reserves Statement.....	27
Table 1-3:	Initial Capital Cost Estimate Summary (direct and indirect).....	34
Table 1-4:	Summary of Project Economics.....	36
Table 4-1:	Grassy Mountain Annual 2020 Land Holding Costs.....	49
Table 6-1:	WMC Work Completed, Frost Area Claims Group.....	59
Table 10-1:	Grassy Mountain Claim Block Drilling Summary.....	79
Table 10-2:	Paramount 2016–2019 RC Pre-Collar vs. Core Lengths.....	86
Table 11-1:	Grassy Mountain Certified Reference Materials for 2011–2012.....	97
Table 11-2:	Grassy Mountain Certified Reference Materials.....	97
Table 13-1:	2018 PFS Testwork Scope.....	120
Table 13-2:	Metallurgical Test Matrix for SGS Program 15944-02.....	120
Table 13-3 :	2020 FS Production Composites Sample Composition.....	121

Table 13-4:	Head Assays	121
Table 13-5:	Hazen 1989 Comminution Results.....	122
Table 13-6:	Summary of JK DWT Results	122
Table 13-7:	Bond Rod Mill Grindability Test Results.....	122
Table 13-8:	Ball Mill Work Indices	123
Table 13-9:	Average Cyanide and Lime Consumption	127
Table 13-10:	Cyanide Destruction Test Results from Historical Work.....	128
Table 13-11:	Cyanide Destruction Test Results – Continuous Test	129
Table 13-12:	Leach Test Data Used for Recovery Estimation	129
Table 13-13:	Estimated Additional Plant Losses for Gold	134
Table 13-14:	Estimated Additional Plant Losses for Silver	134
Table 14-1:	Hazen Research, Inc. Tonnage Factors	138
Table 14-2:	Combined Atlas and Paramount Tonnage Factors.....	139
Table 14-3:	Approximate Grade Ranges of Gold and Silver Domains	139
Table 14-4:	Grassy Mountain Gold and Silver Assay Caps by Domain.....	145
Table 14-5:	Descriptive Statistics of Grassy Mountain Coded Gold Assays.....	145
Table 14-6:	Descriptive Statistics of Grassy Mountain Coded Silver Assays	146
Table 14-7:	Descriptive Statistics of Grassy Mountain Gold Composites	146
Table 14-8:	Descriptive Statistics of Grassy Mountain Silver Composites	146
Table 14-9:	Estimation Parameters.....	148
Table 14-10:	Pit Optimization Parameters	149
Table 14-11:	Parameters Used to Determine Cutoff Grade for Mineral Resources Potentially Amenable to Underground Mining Methods.....	150
Table 14-12:	Grassy Mountain Gold and Silver Resources	151
Table 14-13:	Grassy Mountain Mineral Resources Potentially Amenable to Open Pit Mining Methods	151
Table 14-14:	Grassy Mountain Mineral Resources Potentially Amenable to Underground Mining Methods.....	151
Table 14-15:	Resource Classification.....	152
Table 15-1:	Mineral Reserves Statement.....	160
Table 15-2:	Cut-off Grade Input Parameters.....	160
Table 15-3:	Stope Optimization Parameters	161
Table 15-4:	External Dilution Grade by Level.....	163
Table 16-1:	Rock Quality Categories	173
Table 16-2:	Ausenco Rock Quality Categories	175
Table 16-3:	Summary of RMR (Bieniawski, 1976) Values by Area.....	176
Table 16-4:	Intact Rock Strength for Geotechnical Units calculated from PLTs	178
Table 16-5:	Summary of RQD, RMR76, and GSI 2013 Values by Geotechnical Unit.....	180
Table 16-6:	Strength Parameters for Geotechnical Units.	181
Table 16-7:	Iso-Probability Contours for Stable Cases Results	183
Table 16-8:	Iso-Probability Contours for Failure Cases Results	184
Table 16-9:	Reinforcement and Support Design for Mine Development Under Rock Mass Environment	191
Table 16-10:	Reinforcement and Support Design for Mine Development Under Backfill Environment.....	191
Table 16-11:	Mine Design Parameters.....	194
Table 16-12:	Equipment Selection	197
Table 16-13:	Drilling First Principles Assumptions	198
Table 16-14:	Bolting First Principles Assumptions	198
Table 16-15:	Shotcrete First Principals Assumptions	199
Table 16-16:	Transmixer First Principle Assumptions.....	200
Table 16-17:	Blasting First Principles Assumptions	202
Table 16-18:	Mucking First Principles Assumptions	204
Table 16-19:	Haulage First Principles Assumptions	205
Table 16-20:	CRF Mix Recipe for UCS Testing.	207

Table 16-21:	Number of Assets Per Crew.....	210
Table 16-22:	Calendars by Crew.....	211
Table 16-23:	Production Rates.....	211
Table 16-24:	Production Limits on Production Fields.....	211
Table 16-25:	Estimated Underground LOM Water Requirement.....	215
Table 16-26:	Mine Production Summary.....	219
Table 16-27:	Material to the Mill.....	220
Table 16-28:	Development Schedule.....	221
Table 17-1:	Key Process Design Criteria.....	223
Table 18-1:	Stage Capacity Relationship.....	239
Table 18-2:	Non-Contact Hydrologic Catchment Areas.....	243
Table 18-3:	Annual Average Water Balance.....	247
Table 18-4:	Built Infrastructure Requirements.....	247
Table 19-1:	Estimated Payability and Refining Costs.....	250
Table 19-2:	Mid-Term Gold Price Estimate by Year from Various Organizations.....	252
Table 20-1:	Surface Disturbance for the Proposed Project.....	254
Table 21-1:	Capital Cost Estimate Input Areas.....	263
Table 21-2:	Initial Capital Cost Estimate Summary (direct and indirect).....	265
Table 21-3:	Initial Capital Cost Estimate by Major Area.....	265
Table 21-4:	Initial Sustaining Capital Cost Estimate Summary (direct and indirect).....	266
Table 21-5:	Exchange Rates.....	267
Table 21-6:	Underground Capital Costs.....	267
Table 21-7:	Leasing Costs.....	269
Table 21-8:	Underground Mine Personnel.....	269
Table 21-9:	Initial Mining Capital Cost Estimate Summary (direct and indirect).....	270
Table 21-10:	Initial Process Capital Cost Estimate Summary (direct and indirect).....	272
Table 21-11:	Direct Man-Hours by Discipline.....	273
Table 21-12:	Initial TSF Capital Cost Estimate Summary (direct and indirect).....	277
Table 21-13:	Initial Owner's Cost Estimate Summary.....	279
Table 21-14:	Summary of Underground Mining Costs per Ton.....	280
Table 21-15:	Costs Applied to the Mine Plan Physicals.....	281
Table 21-16:	Underground Labor.....	281
Table 21-17:	Average Annual Process Operating Cost.....	282
Table 21-18:	Annual Average G&A Operating Cost Summary.....	284
Table 22-1:	Summary of Forecast Project Economics.....	289
Table 22-2:	Project Cash Flow on an Annualized Basis (part A).....	290
Table 22-3:	Project Cash Flow on an Annualized Basis (part B).....	291
Table 22-4:	Pre-Tax Sensitivity.....	293
Table 22-5:	Post-Tax Sensitivity.....	294

List of Figures

Figure 2-1:	Project Location Plan.....	43
Figure 4-1:	Location of the Frost Area Claims Group.....	46
Figure 4-2:	Grassy Mountain Claim Group.....	48
Figure 4-3:	Frost Area Claims Group Showing Area of Interest.....	49
Figure 4-4:	Sherry and Yates Area of Interest.....	50
Figure 5-1:	Access to Grassy Mountain Claims Group.....	53
Figure 5-2:	Access to the Frost Claims Group.....	54
Figure 5-3:	Photograph of Grassy Mountain Area Looking South.....	55
Figure 5-4:	Proposed Power Source for the Planned Operation.....	57

Figure 6-1:	Outlying Target Area Map	60
Figure 6-2:	Map of 2012 CSAMT Lines	63
Figure 6-3:	CSAMT Inversion: Resistivity at 328 to 656 Feet Below Surface	64
Figure 7-1:	Grassy Mountain Regional Geology	66
Figure 7-2:	Stratigraphic Column for the Grassy Mountain Area	67
Figure 7-3:	Grassy Mountain Deposit Area Geologic Map	69
Figure 7-4:	Frost Claims Group Geologic Map	73
Figure 8-1:	Conceptual Hot-Springs Epithermal Deposit Model	74
Figure 9-1:	2018 Aerial Magnetic Survey of Grassy Mountain Area	76
Figure 9-2:	2018 Aerial Magnetic Survey of the Frost Target	77
Figure 9-3:	2019 Ground CSAMT Survey at Frost Target	78
Figure 9-4:	Cross Section Generated by 2019 CSAMT Data at Frost Target	78
Figure 10-1:	Locations of All Drill Holes Within the Grassy Mountain Claim Block	80
Figure 10-2:	Locations of Holes Drilled Through 2017 in the Grassy Mountain Deposit Area	82
Figure 10-3:	Gold Grade vs. RQD	89
Figure 10-4:	Gold Grade vs. Core Recovery	90
Figure 11-1:	Cone Analyses of Preparation Duplicates Relative to Original Chemex Gold Assays	99
Figure 11-2:	Hunter Analyses of Preparation Duplicates Relative to Original Chemex Gold Assays	99
Figure 11-3:	Chemex Analyses of RC Field Duplicates Relative to Original Chemex Gold Assays	100
Figure 11-4:	Shasta Check Analyses Relative to Original Chemex Gold Assays	101
Figure 11-5:	RMGC Check Analyses Relative to Original RMGC Gold Assays	102
Figure 11-6:	RMGC Core Duplicate “B” Relative to RMGC “A” Gold Assays	103
Figure 11-7:	AAL Preparation Duplicate Analyses Relative to AAL Original Gold Assays	104
Figure 11-8:	Chart of ALS Analyses of CRM CDN-GS-3J	105
Figure 11-9:	Chart of ALS Analyses of Coarse Blanks - Calico	106
Figure 11-10:	AAL Pulp Checks of ALS Original Gold Analyses	108
Figure 11-11:	Chart of ALS Analyses of Coarse Blanks - Paramount	109
Figure 11-12:	ALS Gold Analyses Preparation Duplicates - Paramount	110
Figure 11-13:	Core Duplicates Relative to Original Gold Assays - Paramount	111
Figure 11-14:	Second Set of Paramount Core Duplicates Relative to Original Gold Assays	112
Figure 11-15:	Paramount RC Duplicates Relative to Original Gold Analyses	113
Figure 13-1:	Gold Leach Extraction Rate	125
Figure 13-2:	Gold Leach Extraction Rate for Grade Variability Samples	126
Figure 13-3:	Silver Leach Extraction Rate for Grade Variability samples	126
Figure 13-4:	Relationship Between Leach Feed and Residue Grades for Gold	132
Figure 13-5:	Relationship Between Leach Feed and Residue Grades for Silver	132
Figure 13-6:	Predicted versus Measured Recovery for Gold	133
Figure 13-7:	Predicted versus Measured Recovery for Silver	134
Figure 14-1:	Cross Section 3050 Showing Gold Domains	141
Figure 14-2:	Cross Section 3050 Showing Silver Domains	142
Figure 14-3:	Cross Section 3250 Showing Gold Domains	143
Figure 14-4:	Cross Section 3250 Showing Silver Domains	144
Figure 14-5:	Cross Section 3050 Showing Block-Model Gold Grades	153
Figure 14-6:	Cross Section 3050 Showing Block-Model Silver Grades	154
Figure 14-7:	Cross Section 3250 Showing Block-Model Gold Grades	155
Figure 14-8:	Cross Section 3250 Showing Block-Model Silver Grades	156
Figure 15-1:	Mine Production Design of Level 3210, Plan View	162
Figure 15-2:	External Dilution Scheme at Level 3240	163
Figure 16-1:	Grassy Mountain Mine Cross Section Looking North	165
Figure 16-2:	Proposed Grassy Mountain Mine Plan (plan view)	166
Figure 16-3:	Drift Profiles	167
Figure 16-4:	Production Drift Layout (Section Looking East)	167
Figure 16-5:	Detailed level Sequence for a Typical Level	168
Figure 16-6:	Mining Lifts	169
Figure 16-7:	Golder Rock Mass Rating (all 2016–2017 core)	172

Figure 16-8:	RMR 76 Histogram from 27 Drill Holes	174
Figure 16-9:	Examples of Three Geotechnical Rock Classes	175
Figure 16-10:	GM19-37 Core Trays (89.5 to 105.5 ft.) – High Variability in Geotechnical Conditions.....	177
Figure 16-11:	Iso-Probability Contours for Stable Cases (Mawdesley, 2001).	183
Figure 16-12:	Iso-probability contours for failure cases (Mawdesley, 2001).....	184
Figure 16-13:	Modeling Results for Decline Ramp; a) Major Principal Stress, S1; b) Minor Principal Stress, S3; c) Strength Factor, SF; d) Displacements, D.....	185
Figure 16-14:	Modeling Results for Topcut A; a) Major Principal Stress, S1; b) Minor Principal Stress, S3; c) Strength Factor, SF; d) Displacements, D.	186
Figure 16-15:	Modeling Results for Undercut B; a) Major Principal Stress, S1; b) Minor Principal Stress, S3; c) Strength Factor, SF; d) Displacements, D.	187
Figure 16-16:	Modeling Results for Undercut C; a) Major Principal Stress, S1; b) Minor Principal Stress, S3; c) Strength Factor, SF; d) Displacements, D.	188
Figure 16-17:	Three-Dimensional Model of Finite Difference.....	189
Figure 16-18:	Level Access Layout (Looking North)	195
Figure 16-19:	Station Design	196
Figure 16-20:	Resemin Troidon 88 Dual	197
Figure 16-21:	Normet Spraymec 8100	199
Figure 16-22:	Normet Utimec SF 300 Transmixer.....	199
Figure 16-23:	3360 Shotcrete Thickness (units in inches)	201
Figure 16-24:	CAT 440 with Emulsion Configuration	202
Figure 16-25:	CAT R1600 Underground Loader	203
Figure 16-26:	CAT AD22 Truck	204
Figure 16-27:	Distances for the Ton*Mile Calculation	205
Figure 16-28:	Waste Haulage by Year	206
Figure 16-29:	Mixing, Casting and Curing Process	208
Figure 16-30:	UCS Results vs Curing Time	209
Figure 16-31:	Eagle 4000 Backfill Plant	210
Figure 16-32:	Ventilation Network (isometric view looking west)	212
Figure 16-33:	Ventilation Network (Section View Looking Northwest).....	213
Figure 16-34:	Design of Vent Raises.....	214
Figure 16-35:	Sump Design and Layout.....	215
Figure 16-36:	Mobile Refuge Station.....	217
Figure 16-37:	Mine Production Schedule (tons by period)	222
Figure 16-38:	Mine Production Schedule (ounces by period)	222
Figure 17-1:	Simplified Overall Flowsheet.....	226
Figure 17-2:	Proposed Plant Site Layout.....	227
Figure 17-3:	Plant Water Balance	234
Figure 18-1:	Proposed Infrastructure Layout Plan	236
Figure 18-2:	Proposed TSF	238
Figure 18-3:	Hydrologic Catchment Areas	242
Figure 18-4:	Process Plant Stormwater Contact and Non-contact Catchment Areas.....	245
Figure 19-1:	London Bullion Market Association Gold Price (2-year span, US\$/oz).....	251
Figure 19-2:	London Bullion Market Association Silver Price (2-year span, US\$/oz)	251
Figure 19-3:	Mid-Term Gold Prices Forecast by Various Institutions (2020–2024)	252
Figure 19-4:	Historical Gold Price and Futures Gold Contracts on the COMEX Market.....	253
Figure 21-1:	Proposed Mine Organizational Chart.....	270
Figure 22-1:	Forecast Project Post-Tax Unlevered Free Cash Flow (US\$ M).....	288

List of Appendices

Appendix A: Claims List	316
-------------------------------	-----

1 SUMMARY

1.1 Introduction

Ausenco Canada Inc. (Ausenco), Mine Development Associates Inc., a division of RESPEC (MDA), EM Strategies Inc., (EM Strategies), Golder Associates Inc. (Golder) and Geotechnical Mine Solutions (GMS) compiled a technical report (the Report) on a feasibility study (the 2020 FS) completed on the Grassy Mountain Project (the Project) for Paramount Gold Nevada Corp. (Paramount), located in Oregon, USA.

Paramount holds its Project interest through an indirectly wholly-owned subsidiary, Calico Resources USA Corp. (Calico).

1.2 Terms of Reference

The Report supports disclosures by Paramount in the news release dated September 15, 2020, entitled “Paramount Gold’s feasibility study confirms economic viability of the proposed Grassy Mountain gold mine with an after-tax NPV of \$105 million”.

Measurement units used in this Report are generally US customary; however, some units, such as analytical and metallurgical testwork units may be in metric units. Unless otherwise stated, all monetary amounts are in United States dollars (US\$).

Mineral Resources and Mineral Reserves are reported in accordance with the Canadian Institute of Mining, Metallurgy and Petroleum (CIM) Definition Standards for Mineral Resources and Mineral Reserves (May 2014; the 2014 CIM Definition Standards).

1.3 Project Setting

The Grassy Mountain deposit is situated near the western edge of the Snake River Plain in eastern Oregon, 20 miles south of the town of Vale, Oregon and about 70 miles west of the city of Boise, Idaho. Support services for mining and other resource sector industries in the region would primarily be provided by these communities. The closest major airport is at Boise, which is a commercial airport served by all major US airlines.

Access to the main Grassy Mountain deposit within the Grassy Mountain claims group is provided by Twin Springs Road, a seasonally-maintained unpaved road that originates at Russell Road, a paved two-lane county road that joins with US Highway 20 approximately four miles west of Vale. Access to the Frost Area is from US Highway 20 to Harper Junction, then follows Crowley Road for 21.3 miles, turning onto the Dry Creek Cut-off Road, which is followed for 5.3 miles to the Frost Area claims group.

The climate is semi-arid and continental-interior in type. Average annual precipitation is approximately about 9 inches, roughly half of which falls as snow between November and March. Mining activities are expected to be conducted year-round.

The Project area is in the semi-arid high desert plateau region of eastern Oregon. Elevations range from 3,330 to 4,300 ft above mean sea level at the main Grassy Mountain claims group area while elevations at the Frost Area claims group range from 4,400–5,000 ft above mean sea level. The terrain is mainly open steppe with mesas, broad valleys, and gently rolling hills to steeper uplands.

Vegetation across the entire area consists of sagebrush, weeds, and desert grasses tolerant of semi-arid conditions.

1.4 Mineral Tenure, Surface Rights, Water Rights, Royalties and Agreements

The Grassy Mountain Project consists of two claims groups located within Malheur County, the Grassy Mountain claims group covering 9,300 acres, and the Frost Area claims group covering 1,720 acres. The mineral tenure holdings comprise 511 unpatented lode claims, nine unpatented mill site claims, three patented claims, and a land lease for 28 unpatented lode mining claims. Claims are held in the name of Paramount's US subsidiary, Calico.

Patented claims were individually surveyed at the time of location. Unpatented claim and fee land boundaries were established initially by handheld global positioning system (GPS) units and were formally surveyed in 2011.

Calico Resources Corp. (Calico BC) acquired all right, title and interest in the Project, including all existing exploration and water rights pertaining to the Grassy Mountain Project, pursuant to a "Deed and Assignment of Mining Properties" between Seabridge Gold Inc., Seabridge Gold Corporation (collectively Seabridge) and Calico BC dated February 5, 2013. Paramount acquired Calico BC in July 2016 and amalgamated the two companies.

Paramount's 100% ownership of the Grassy Mountain project is subject to underlying agreements and royalties.

Seabridge is entitled to a 10% net profits interest (NPI) royalty. Pursuant to the Deed of Royalties, within 30 days following the day that Calico made a production decision and construction financing was secured, Seabridge may elect to cause Calico to purchase the 10% NPI for C\$10 million. Otherwise Seabridge will retain the 10% NPI. Seabridge, at the Report effective date, is the second largest Paramount shareholder and has indicated that it will convert its NPI into equity in Paramount, thus the Seabridge NPI has not been included in the 2020 FS.

Sherry and Yates are entitled to a 1.5% royalty of the gross proceeds on any production from three patented and 37 unpatented mining claims, and a surrounding ½ mile area of interest. The royalty is not subject to any advance-royalty payments. The royalty covers the area of the Grassy Mountain deposit.

Cryla LLC (Cryla) leased 28 unpatented lode mining claims located west of Grassy Mountain to Calico in 2018. Calico is required to make an annual lease payment of \$60,000. After June 2020, Calico may elect to acquire the property for \$560,000 plus \$3/oz of gold reserves, as defined by a pre-feasibility or higher confidence-level study. Cryla is entitled to a 2% NSR if the gold price is ≤US\$1,500/oz and a 4% NSR if the gold price >US\$1,500/oz. Calico is entitled to reduce the NSR to 1% by paying Cryla \$800,000 under any circumstances. No Mineral Resources or Mineral Reserves are estimated on the Cryla claims.

Nevada Select Royalty Inc. (Nevada Select) entered into an agreement with Calico that will allow Calico to obtain a 100% interest in the Frost Area claims group for \$250,000. Nevada Select retains a 2% NSR royalty for the production of minerals from the Frost Area claims group as well as a surrounding one-mile area of interest. Calico has the right to buy down 1% of the royalty for \$1 million, which would result in a 1% NSR on the Frost Area claims group. No Mineral Resources or Mineral Reserves are estimated on the Nevada Select claims.

Paramount holds three patented claims over the Grassy Mountain deposit, which provides surface rights for that area. The surrounding surface rights associated with the proposed locations of the Project surface facilities belong to the Federal government and are managed by the Vale District Bureau of Land Management (BLM) office.

Paramount holds a water right granted by the Oregon Water Resources Department to Calico. The water right was issued on April 5, 1990 through State of Oregon Water Rights Application G-11847

and Permit G-10994. Use is limited to not more than 2.0 ft³/second (897.6 gal/min) measured at the well. On December 11, 2019, the State of Oregon issued a new Permit to Appropriate the Public Waters (G-18337) that replaces the previous permit and includes the requested modifications. This permit does not change the 2.0 ft³/second of water use allowed.

1.5 Geology and Mineralization

The geological setting, hydrothermal alteration, styles of gold-silver mineralization, and close spatial and timing association with silica sinter deposition, indicate that Grassy Mountain is an example of the hot-springs subtype of low-sulfidation, epithermal precious-metals deposits.

The Miocene-age Lake Owyhee volcanic field is the regional host to a number of recognized epithermal hot-spring precious-metal deposits, of which the Grassy Mountain deposit is the largest. Initial large-volume peralkaline and subalkaline caldera volcanism was followed by subsidence, forming extensive grabens. These were filled by small-volume metaluminous high-silica rhyolite domes and flows, small-volume basalt flows and mafic vent complexes, and co-eval lacustrine and fluvial sediments.

The Grassy Mountain deposit extends for about 1,900 ft along a N60°E to N70°E axis, as much as 2,700 ft in a northwest–southeast direction, and as much as 1,240 ft vertically.

The deposit is hosted in units of the Miocene Grassy Mountain Formation, consisting of interbedded conglomerate, sandstone, siltstone, tuffaceous siltstone, mudstone, and several silica sinter deposits. It is situated within a zone of complex extensional block faulting and rotation, dominated by N30°W to N10°E striking normal faults (graben faults). A set of orthogonal, N70°E-striking high-angle faults of minor displacement are inferred to link the graben faults.

Silicification (silica sinter, pervasive silica flooding, and as cross-cutting chalcedonic veins, veinlets, and stockworks) is the principal hydrothermal alteration type associated with gold–silver mineralization. In some parts of the deposit, particularly within arkose and sandy conglomerate units, silicification can be accompanied by potassic alteration in the form of adularia flooding.

Mineralization is developed largely within the silicic and potassic alteration zones. Three distinct and overlapping types of gold–silver mineralization are recognized within the central core of the deposit. These are gold-bearing chalcedonic quartz ± adularia veins, disseminated mineralization in silicified siltstone and arkose, and gold and silver in bodies of clay matrix breccia. Gold mostly occurs as electrum along the vein margins or within microscopic voids. Lower-grade mineralization envelopes the higher-grade core and, further from the core, extends outwards as stratiform, mineralized lenses parallel to bedding.

1.6 History

Companies and individuals involved in exploration prior to Paramount's Project interest include prospectors Richard "Dick" Sherry and Eugene "Skip" Yates, Atlas Precious Metals (Atlas), Golden Predator Mines U.S. Inc., Newmont Exploration Ltd (Newmont), Tombstone Exploration Company Ltd (Tombstone), Seabridge, and Calico BC. Work completed included reconnaissance, geological mapping, geochemical sampling (soil, float, rock chip), geophysical surveys (airborne magnetic and radiometric, ground-based gravity, gradient array (IP/resistivity) controlled-source audio-frequency magnetotelluric (CSAMT)), core and reverse circulation (RC) drilling, and Mineral Resource estimation. This work defined the Grassy Mountain deposit, on which a feasibility study was completed in 1990 by Atlas assuming a combined heap leach/milling operation and open pit mining methods.

Since acquiring its Project interest in 2016, Paramount has conducted an exploration review of the available Project data, helicopter-borne aeromagnetic and radiometric and CSAMT ground geophysical surveys, drilling, Mineral Resource and Mineral Reserve estimation, baseline

environmental studies, and mining studies. A feasibility study was completed in 2020 and is the subject of this Report.

A number of prospects were located during the exploration programs. Of these, the Crabgrass, Bluegrass, North Bluegrass, Ryegrass and Dennis' Folly areas in the Grassy Mountain claims block were recommended for surface work with the goal of defining further exploration drill targets. The CSAMT survey over the Frost Area claims group revealed some resistivity anomalies that warrant consideration for drill testing.

No production is known from the Project area.

1.7 Drilling and Sampling

The database includes a total of 264,112 ft drilled by four historical operators (Atlas, Tombstone, Newmont, Calico BC), from 1987 through 2012, in 442 drill holes. Paramount drilled 34 holes for a total of 25,511 ft in 2016–2019 to bring the Project total to 476 holes and 289,623 ft drilled. Approximately 77% of the footage drilled was at, and adjacent to, the Grassy Mountain deposit area, although nearly 43% of the holes were drilled at outlying prospects, as well as for water wells.

The bulk of the drill holes in the Grassy Mountain deposit area was drilled using RC, accounting for 77% of the footage drilled. Holes drilled using core methods account for about 12% of the footage drilled in the deposit area, and holes drilled with RC pre-collars and core tails account for about 11%. A total of 256 of the drill holes in the Grassy Mountain deposit area support Mineral Resource estimation, including 34 Paramount drill holes and 252 historical drill holes.

During the Calico BC and Paramount drill programs, logging recorded lithological, alteration, mineralization, and structural information, including the angle of intersection of faults with the core, fault lineations, fractures, veins, and bedding. Up until Calico BC's involvement in the Project in 2011, the Project coordinates were based on a local grid established by Atlas. All Calico and subsequent drill-hole collar surveys were collected directly in UTM coordinates. Where information is recorded, drill collars were located using total station, Trimble, survey-grade GPS, and Topcon Hiper V GPS Receivers instrumentation. Down hole surveys were performed, where recorded, using Eastman, REFLEX EZ-Track, gyroscopic, Goodrich-Humphrey surface-recording gyroscopic and Goodrich surface-recording gyroscopic instruments.

Wet RC cuttings were split using a variable or rotary wet-cone splitter positioned below the cyclone on the RC rigs. Dry cuttings were split under the cyclone with a Jones splitter. During the Calico BC and Paramount drill programs, core sample lengths generally did not exceed 5 ft and, where possible, correlated to the 5 ft drilling runs. Competent core was cut using either a hydraulic splitter or a diamond blade core saw. During the Newmont program material too fine to be sawed was carefully swept out of the core boxes for each sample interval, split into halves using a Jones splitter, and recombined with the half-core to be sent for assaying. During the Calico BC and Paramount drill programs, core that was intensely broken or very soft was split in half using a small scoop or putty knife.

Laboratories used for sample preparation and analysis include Chemex Analytical Laboratories (Chemex; Boise and Vancouver), Rocky Mountain Geochemical Corporation (Rocky Mountain; Salt Lake City); American Assay Laboratory (AAL; Reno); and ALS Minerals (ALS; Reno). All laboratories were independent. Accreditations for Chemex, Rocky Mountain and AAL at the time used are not known. ALS holds ISO 9001:2008 accreditation for quality management and ISO/IEC17025:2005 accreditation for selected analytical techniques.

Laboratories used for check analysis included Chemex, AAL, Cone Geochemical Laboratories (Cone; Denver), and Hunter Mining Laboratories (Hunter; Reno). Accreditations at the time are not known. The laboratories were independent.

Sample preparation and analytical methods included:

- Chemex: dried, crushed to minus 1/8 inch, pulverized to 95% at minus 100 mesh. Gold and silver assays using 30 g aliquots and fire assay fusion, primarily with an atomic absorption (AA) finish;
- Rocky Mountain: dried, crushed to minus 10 mesh, pulverized to minus 48 mesh and repulverized to nominal, minus 150 mesh. Fire assayed for gold with a gravimetric and AA finishes. Screen-fire assays completed where gold values were >0.20 oz Au/ton;
- AAL: dried, crushed to 8–10 mesh, pulverized to 90% -150 mesh. Gold assays via fire assaying with an AA finish. Silver via method D210, which included aqua-regia digestion;
- ALS: dried, crushed to 75% at <6 mm, pulverized to 85% at <75 μm (200 mesh). Gold assays via fire assaying with an AA finish. A separate five-gram aliquot was used for inductively coupled plasma atomic-emission spectrometric (ICP-AES) determination of silver and 32 major, minor, and trace elements following a four-acid digestion. Gold overlimits re-assayed using fire assay with gravimetric finish. Silver overlimits re-assayed using 10-g aliquot with a four-acid digestion for silver and an AA finish or 30-g fire assay with a gravimetric finish.

The available Atlas quality assurance and quality control (QA/QC) data of consequence (the preparation and field duplicates) suggest that the original gold assay results may be overstated to some extent. However, the average grade of the duplicate dataset is much higher than the average grade of the Grassy Mountain deposit, and repeat analyses of only the higher-grade portion of a deposit with free gold can yield lower results than original assays. Without further data, it is impossible to know whether there is a high bias in the Atlas results, although a comparison of resources with and without Paramount drill data suggests there are no material issues with the Atlas data. The Newmont QA/QC data do not identify any issues, while it is possible that the Tombstone gold values are slightly understated. No issues were revealed by the Paramount certified reference material (CRM), blank, and preparation-duplicate data. The core duplicate data suggest that the Paramount gold assays of core, particularly at higher grades, may be understated to some degree. These data also serve to emphasize the importance of careful sampling and splitting of core-box fines. The variability evidenced by the duplicate data from all operators at Grassy Mountain does not exceed normal bounds, especially considering the presence of visible gold.

1.8 Data Verification

Paramount originally provided MDA with the Project drill-hole database prior to the initiation of the 2016–2017 drilling program. This database was then subjected to data verification and corrections made as appropriate. Following the creation of a verified database, MDA periodically updated this database with the information acquired during Paramount's various drilling programs.

As part of the 2016–2017 drilling program, all prior drill-hole collars that could be identified in the field were re-surveyed. The collar locations of 82 Atlas drill holes, six Newmont drill holes, four Tombstone drill holes, and nine Calico drill holes were surveyed. MDA was provided the original digital file produced by the survey contractor, and MDA used this file to compare the new survey locations with those in the existing database. The scale of the discrepancies in the drill hole locations is not considered to be material due to the nature of the Grassy Mountain mineralization and the 10 x 10 x 10-ft block size used in modelling.

MDA compared the total depths of 47 historical drill holes against historical records and found no material errors.

Down-hole survey records from selected drill holes from the historical drilling were examined. No material errors were noted; errors that were identified were corrected in the database. The drill-collar azimuths and dips for 40 drill holes were checked against historical records and no discrepancies were found.

The database assay values for selected intervals from historical drill holes were checked against historical documents. No material discrepancies were found; errors that were identified were corrected in the database.

MDA personnel conducted site visits; including inspection of outcrop, visiting core and RC drill sites with ongoing sampling and logging, reviewing drill core, and reviewing all Project procedures related to logging, sampling, and data capture.

The QP verified that the Grassy Mountain Project data are acceptable as used in this Report, most significantly to support the estimation and classification of the Mineral Resources.

1.9 Mineral Processing and Metallurgical Testing

In support of the 2020 FS, historical work conducted by Hazen Research Inc., Golden Sunlight, Newmont and Resource Development Inc. (RDI) was reviewed. The degree to which historical metallurgical samples are representative of the Grassy Mountain deposit is not known with certainty, but there is no evidence that the historical samples were not representative. Early historical work listed above is viewed as indicative or informative only since the QP was not able to reconcile the test results to drill hole locations and depth to confirm that these drill holes represent the ore in the current mine plan.

During 2017, Paramount completed head grade analyses, comminution tests (JK drop-weight tests), gravity and leach tests, and rheology and solid/liquid separation tests. This was supplemented in 2019 and 2020 by chemical and mineralogical analysis, Bond ball and rod mill work index tests, and testwork on leaching, oxygen demand, and cyanide destruction.

Tests were performed on mineralization that is considered to be representative of the material that will be sent to the plant. Composite samples representing major lithologies, Year 1 and Year 2 production composites and a range of head grades aligned with the minimum and maximum values expected in the plant feed in the initial two years of production were tested in 2019–2020.

The grade variability composite samples calculated gold and silver grades ranged from 3.57–13.13 g/t (0.104 oz./ton and 0.383 oz./ton) Au and 5.1–21.5 g/t Ag (0.149 oz./ton and 0.628 oz./ton).

Comminution testing showed that all the materials tested are considered very hard, with Bond ball mill work indices ranging from 18.1 to 29 kWh/t.

Bottle roll and agitated batch leach tests showed that the materials were highly responsive to recovery by cyanidation at a grind size of 80% passing 106 μm or lower, with leach recoveries ranging from 82.1–97.5% for gold and 59–84.6% for silver, dependent on leach feed grade.

Overall plant recoveries for gold are predicted to range from 89.5–94.9% for head grades of 3.3–17.4 g/t Au (0.096 oz./ton – 0.58 oz./ton) over the life of mine (LOM). Overall plant recoveries for silver are predicted to range from 62.7–80.4% for head grades of 5.5–17.9 g/t (0.161 oz./ton – 0.523 oz./ton) Ag over the LOM.

Cyanide destruction tests achieved <0.2 mg/L CN_{WAD} , which is well within the maximum legislated value in Oregon of 30 mg/L.

Mercury grades were in the range of 1.86–2.64 g/t in the leach feed, and the concentration of mercury in solution after leaching ranged from 0.08–0.26 mg/L. A retort and gas collection and scrubbing system was incorporated into the plant design to manage and control mercury in the process. Arsenic is present in the feed at concentrations ranging between 119–183 g/t and is not expected to be problematic in processing. No other elements that may cause issues in the process plant or concerns with product marketability were noted.

1.10 Mineral Resource Estimation

Paramount supplied MDA with a set of detailed cross-sectional lithological and structural interpretations that cover most of the extent of the Grassy Mountain deposit. These cross-sections were used as the base for MDA's modeling of the gold and silver mineralization. MDA made minor modifications to Paramount's structural interpretations and also modeled some additional structures.

Density used in estimation was based on water displacement measurements performed by Atlas and Paramount. The Grassy Mountain mineralization has a consistent density, while unmineralized rocks are distinctly lighter. This is likely a reflection of alteration, as mineralization of all grades is strongly silicified, while unmineralized portions of the host rocks are generally far less silicified, if at all. A tonnage factor of 13.5 ft³/ton was used for mineralization and 14.8 ft³/ton for non-mineralized material.

Three gold–silver grade populations were outlined. The highest-grade gold population (>~0.25 oz Au/ton; domain 200) strongly correlated with the presence of thin, often banded, quartz–chalcedony veins–veinlets and/or breccias. The mineralization captured within the lower-grade domain (domain 100) is much less variable than the higher-grade mineralization. This mineralization is distal from the zone of boiling and related brecciation, and its distribution exhibits strong effects from stratigraphic controls. Domain 0 correlated with outside domain material.

Assay caps were determined by the inspection of population distribution plots of the coded assays, by domain, to identify high-grade outliers that might be appropriate for capping. Gold was capped at values ranging from 0.09–10 oz/t Au, and silver was capped at values ranging from 0.12–7 oz/t Ag. In addition to the assay caps, restrictions on the search distances of higher-grade portions of some of the domains were applied during grade interpolations.

Level-plan mineral-domain polygons were used to code a three-dimensional block model with a model bearing of 340° consisting of 5 x 10 x 10-ft blocks (model x, y, z). The volume percent of each mineral domain for both gold and silver was stored within each block (referred to as the partial percentages). The block model was also coded using a digital topographic surface.

Grade interpolation was completed in three passes using length-weighted composites. The block model was coded to two unique estimation areas (areas 10 and 20). Estimation area 10 encompassed most of the Grassy Mountain deposit and was characterized by shallow dips of the stratigraphic host rocks of up to about -15°. Estimation area 20 consists of the west–southwesternmost portion of the deposit where the dips of the stratigraphic units steepen to approximately -20°. In order to prioritize the estimation of the highest-grade mineralization, which is most commonly associated with steeply dipping veinlets, the estimation of the higher-grade domain was initiated to reflect high-angle structural control. The second estimation pass of the higher-grade domain invoked a search ellipse reflective of stratigraphic control while using the same search distance as pass 1 (50 ft). The third and final estimation pass was an isotropic pass, i.e. without either a structural or stratigraphic bias, and was used to estimate domain 200 grades into blocks that were not estimated by the first two passes, which are largely limited to the outer extents of the domain. Only a very limited portion of the higher-grade gold and silver domains lie in estimation area 20.

Statistical analyses of coded assays and composites, including coefficients of variation and population-distribution plots, indicate that multiple populations of significance were captured in the higher-grade domain (domain 200) of both gold and silver. This led to the restrictions on the search distances for higher-grade populations within some domains.

Gold and silver grades were interpolated using inverse-distance to the third power (ID3), ordinary-kriging (OK), and nearest-neighbor (NN) methods. The Mineral Resources were estimated using ID3 interpolation, as this method led to results that were judged to more closely approximate the drill data than those obtained by OK. The NN estimation was completed as a check on the ID3 and OK interpolations. The estimation passes were performed independently for each of the mineral domains,

so that only composites coded to a particular domain were used to estimate grade into blocks coded by that domain. The estimated grades were coupled with the partial percentages of the mineral domains and the outside-domain volumes to enable the calculation of weight-averaged gold and silver grades for each block.

The Mineral Resources were estimated to reflect potential open-pit extraction and milling as the primary scenario (Mineral Resources potentially amenable to open pit mining methods), with potential underground mining of material lying outside of the pit as a secondary scenario (Mineral Resources potentially amenable to underground mining methods). A conceptual pit shell was used to constrain the Mineral Resources potentially amenable to open pit mining methods, with the added constraint of a gold-equivalent (AuEq) cut-off grade of 0.012 oz/ton AuEq applied to all model blocks lying within the optimized pit. The oz/ton AuEq grade of each model block was calculated as follows:

- $\text{oz/ton AuEq} = \text{oz/ton Au} + (\text{oz /ton Ag} \div 100)$.

Mineral Resources potentially amenable to underground mining methods were estimated by applying a cut-off of 0.060 oz/ton AuEq to blocks lying immediately outside of the optimized pit.

Both resource estimates are based on a 5,000 tons/day processing rate, with processing assumed to consist of crushing, milling, and first-stage gravity separation followed by carbon-in-leach recovery.

1.11 Mineral Resource Statement

Mineral Resources are reported inclusive of the Mineral Resources that have been converted to Mineral Reserves, using the 2014 CIM Definition Standards. Mineral Resources that are not Mineral Reserves do not have demonstrated economic viability. The Qualified Person for the estimate is Michael M. Gustin, CPG, of MDA. The Mineral Resource estimates are presented in Table 1-1.

Table 1-1: Mineral Resource Statement

Classification	Tons	oz Au/ton	oz Au	oz Ag/ton	oz Ag
Measured	18,190,000	0.020	369,000	0.079	1,438,000
Indicated	12,712,000	0.054	691,000	0.146	1,861,000
Measured + Indicated	30,902,000	0.034	1,060,000	0.107	3,299,000
Inferred	1,004,000	0.041	41,000	0.120	120,000

1. The Qualified Person for the estimate is Mr. Michael M. Gustin, CPG, of MDA.
2. Mineral Resources comprised all model blocks at a 0.012 oz AuEq/ton cutoff that lie within an optimized pit plus blocks at a 0.060 oz AuEq/ton cutoff that lie outside of the optimized pit.
3. oz AuEq/ton (gold equivalent grade) = oz Au/ton + (oz Ag/ton ÷ 100).
4. Mineral Resources are reported inclusive of those Mineral Resources converted to Mineral Reserves. Mineral Resources that are not Mineral Reserves do not have demonstrated economic viability.
5. Mineral Resources potentially amenable to open pit mining methods are reported using a gold price of US\$1,500/oz, a silver price of US\$20/oz, a throughput rate of 5,000 tons/d, assumed metallurgical recoveries of 80% for Au and 60% for Ag, mining costs of US\$2.00/ton mined, processing costs of US\$13.00/ton processed, general and administrative costs of \$2.22/ton processed, and refining costs of \$5.00/oz Au and \$0.50/oz Ag produced. Mineral Resources potentially amenable to underground mining methods are reported using a gold price of US\$1,500/oz, a silver price of US\$20/oz, a throughput rate of 5,000 tons/d, assumed metallurgical recoveries of 90% gold equivalent, mining costs of US\$50.00/ton mined, processing costs of US\$25.00/ton processed, general and administrative costs of \$8.00/ton processed, and refining costs of \$5.00/oz Au produced.
6. The effective date of the estimate is March 31, 2020;
7. Rounding may result in apparent discrepancies between tons, grade, and contained metal content.

1.12 Mineral Reserve Estimates

An underground mining scenario is assumed using mechanized cut-and-fill methods, which, following ramp-up, will produce 1,300–1,400 tons/d, four days a week. This mining rate will provide sufficient material for the 750 ton/day mill and processing plant to operate at full capacity for seven days a week.

The Proven and Probable Mineral Reserves for Grassy Mountain were estimated by first calculating an economic cut-off grade for mining underground stopes, then using the cut-off grade to design stope shapes centered on Measured and Indicated Mineral Resource blocks with gold grades greater than or equal to the cut-off grade. All Inferred material was considered to be waste with no value or metal content. Internal and external dilution and mining recoveries (ore loss) were estimated and applied as modifying factors based on the total tonnage of material inside of the final designs.

The calculated gold cut-off grade is 0.10 oz/ton Au. Silver was not included in the cut-off grade calculation due to its relatively small contribution to total economic value. However, revenue for silver is included in the financial model, and therefore silver grade and silver contained metal are reported in the estimated Mineral Reserves. The economic stope cut-off grade was used in the stope optimization to identify the Measured and Indicated blocks available for consideration to be converted to Mineral Reserves. Measured and Indicated resource blocks with grades less than the economic stope cut-off grade were applied to internal dilution.

Each stope block was queried against the resource block model to determine the tonnages and grades within the stope shapes. Stopes with an average gold grade above the cut-off grade were selected to be included in the mine plan and Mineral Reserves estimate. Some isolated stopes above the cut-off grade were eliminated from consideration because the development to extract them would cost more than the economic return. The dilution and extraction were not considered during the stope optimization. The dilution and extraction were applied as modifying factors later in the process. Development designs were generated concurrently for each stope shape with the purpose of minimizing development in waste.

A modifying factor of 8% was used for calculating external dilution tons. All Inferred resource blocks or partial blocks within the stopes and all unclassified material within the stopes is considered internal dilution. The tons were accounted for with zero grade.

Mining recovery is estimated to be 97% based on an assumed ore loss of 3%. This is considered appropriate for the highly selective mechanized cut-and-fill mining method selected for the Grassy Mountain deposit and it is based on similar operations in disseminated ore bodies.

1.13 Mineral Reserve Statement

The reference point for the estimated Mineral Reserves is the crusher. The Mineral Reserves estimated for the Grassy Mountain Project are provided in Table 1-2 and have an effective date of 10 July, 2020. The Qualified Person for the estimate is Mr. Joseph Seamons, P.E., of MDA.

Table 1-2: Mineral Reserves Statement

Classification	Tons (x 1,000)	Gold Grade (oz/ton Au)	Silver Grade (oz/ton Ag)	Contained Metal (oz Au x 1,000)	Contained Metal (oz Ag x 1,000)
Proven	260	0.18	0.26	47	68
Probable	1,652	0.20	0.29	333	486
Proven + Probable	1,911	0.20	0.29	380	554
Ore Loss & Dilution	159	0.06	0.15	10	24
Proven + Probable + Ore Loss & Dilution	2,070	0.19	0.28	390	578

Notes:

1. Mineral reserves have an effective date of 10 July, 2020. The Qualified Person for the estimate is Mr. Joseph Seamons, P.E., of MDA.
2. Mineral Reserves are reported using the 2014 CIM Definition Standards.
3. Mineral Reserves are reported inside stope designs assuming drift-and-fill mining methods, and an economic gold cutoff grade of 0.10 oz/ton Au. The economic cutoff grade estimate uses a gold price of \$1,350/oz, mining costs of \$80/ton processed, surface re-handle costs of \$0.16/ton processed, process costs of \$30/ton processed, general and administrative costs of \$11.11/ton processed, and refining costs of \$5/oz Au recovered. Metallurgical recovery is 94.5% for gold. Mining recovery is 97% and mining dilution is assumed to be 8%. Mineralization that was either not classified or was assigned to Inferred Mineral Resources was set to waste. A 1.5% NSR royalty is payable. The reserves reference point is the 2020 FS mill crusher.
4. Tonnage and contained metal have been rounded to reflect the accuracy of the estimate. Apparent discrepancies are due to rounding.

1.14 Mining Methods

1.14.1 Overview

The Grassy Mountain mine will be an underground operation accessed via one decline and a system of internal ramps. One ventilation raise is included in the design to be used for ventilation and secondary egress. The mechanized cut-and-fill mining method was selected. The mining direction will be underhand. Cemented rock fill (CRF) will be used for backfill. The mechanized cut-and-fill method is highly flexible and can achieve high recovery rates in deposits with complex geometries, as is the case at the Grassy Mountain deposit. The estimated mine life is eight years.

The mining sequence contains a detailed level sequence and an underhand sequence. The level access is mined first. The mains are mined second. Typically, two mains are mined at the same time providing multiple mining locations on a level. After the mains are mined, then the production drifts can begin mining. The production drifts are sequenced with primaries and secondaries. The primaries are mined and backfilled first. This continues until the entire level is complete. After the entire level is complete the level access is backfilled. The underhand sequence is grouped into lifts. One level in each lift can be mining at any given time during the life of mine. The underhand sequence starts at

the top and works down in elevation. Constraints will be applied to ensure that the bottom level of a lift does not influence the top level of the lift below.

1.14.2 Geotechnical Considerations

The Grassy Mountain deposit is situated is a horst block which has been raised 50–200 ft in a region of complex block faulting and rotation. Faulting is dominated by post-mineral N30W to N10E striking normal faults developed during Basin and Range extension. On the northeast side of the deposit, these faults progressively down-drop mineralization beneath post-mineral cover. The North and Grassy faults are significant fault structures that pose a risk to the stability of an open stoping method; hence, these areas are considered suitable only for a limited man-entry mining method such as mechanized cut-and-fill, where conditions can be well controlled.

Time-dependent drill core degradation has previously been identified at Grassy Mountain. In general, degraded zones are contained within siliceous sinter bodies, conglomerates, and interbedded tuff beds within the Grassy Mountain Formation. Degradation is strongest in intervals that are observed or interpreted as having contained silicic and potassic alteration. Degradation of Grassy Mountain Formation lithologic units results in difficult mining conditions that can be mitigated through additional ground support. This would result in higher mining cost with slower advance rates in those areas.

Stress measurements are not currently available. In the absence of this information, a stress regime based on the World Stress Map was used to obtain a range of estimates. Based on the shallow depth, ground stress is relatively low, and rock damage due to higher mining-induced stress concentrations is only anticipated in high-extraction or sequence closure areas and weaker rock mass areas. However, a reduction in the mining stresses around excavations is likely to adversely affect the stability of large open-span areas. Tensile failure and gravity-induced unraveling are foreseen as the main failure mechanisms.

The Grassy Mountain deposit is in a structurally complex, clay-altered, epithermal environment. Rock mass conditions in the infrastructure and production areas vary from Poor to Fair quality (RMR 20–45; RMR mean 40–45) with the poorest conditions within major structures that run longitudinally through and bound the deposit. Outside of these fault areas, rock mass conditions are generally Fair. However, localized zones of Poor ground potentially associated with secondary structures or locally elevated alteration intensity are present throughout the planned mining area.

Excavation stability assessments were completed using industry-accepted empirical relationships, with reference to analog operational mines where possible. The rock mass conditions (Poor to Fair) are considered suitable only for a selective underground mining methods and limited sizes, such mechanized cut and fill.

Ground support design considers industry-standard empirical guidelines and GMS's experience in variable ground conditions. Compromises have been made in the extraction sequence due to the need to balance grade and production profiles, extraction of wide orebody areas, and other geotechnical constraints. Ultimately, some aspects of the sequence may not be geotechnically optimal, and additional analysis or design may be required.

1.14.3 Mine Design

The portal is designed to allow access to the underground mine facilities while providing adequate space for equipment and vehicles. It will be located uphill and approximately 750 ft south of the primary crusher, at an approximate elevation of 3,749 ft. Weak rock mass ground conditions at the portal require that a shallow box-cut excavation be established to form a suitable face where tunneling can occur.

The Grassy Mountain orebody will be accessed using a 15 x 15 ft main decline, developed from a portal on surface. The decline will provide the connection to all services. The design intent is to have the decline located as close as possible to the mineralization in order to reduce transportation costs, but sufficiently removed from mining activities to ensure that the decline is geotechnically stable for the planned life-of-mine (LOM).

Level stations will have a standoff distance from the orebody of approximately 300 ft. This distance is determined by the maximum gradient of the level access of 12.5%, the geometry of accessing five levels for every one level station, and the geometry of the orebody. There are five stations planned for the mine, accessed off the decline, and each station will access up to five production levels. Each station will have a truck loading bay (used to load trucks with load-haul-dump (LHD) vehicles), power bay (used to store the mobile load center), ventilation access (will connect on each station via vent raises), stockpile (used to store material until it can be loaded into trucks), sump (used to collect mine water, and level access (provide access to the production stopes).

When a production stope gets within two rounds of the design, the stope will go on grade control. When a stope is on grade control, every round must be sampled before the next round can be drilled. The stope may end prematurely or extend past the design if the assayed grade is below or above the cut-off grade.

The ventilation network was designed to comply with US ventilation standards for underground mines. The planned ventilation will use a push/pull system and will require two exhaust fans on surface. A raise bore will be used to construct ventilation raises between level stations and connecting to the surface fans. Each vent raise will have a diameter of 12 ft. Each raise will be steel lined and have an escape ladder. Auxiliary fans will take air from the main circuit and push the air to the working face on the level using vent ducting and vent bag. Each level will have an auxiliary fan at the level station.

Mine operations will be based on the usage of mobile mining equipment suitable for underground mines. The estimate of the fleet size was based on first principles and equipment running-time requirements to achieve the mine production plan. Equipment is conventional for mechanized cut-and-fill mining operations.

Water will be needed for underground production drilling, bolting, shotcrete, and diamond drilling. The required LOM water supply has been estimated based on the mine-equipment requirements.

Underground power will be provided by two transformers. The transformers will be moved, as required, depending on the location of the mining activities. A main power line will be installed along the rib of the decline to carry 1.4 kV. Line power will also be extended to the locations of the two ventilation shafts to supply power to the ventilation fans.

Two mobile emergency refuge stations will be provided in case of fire or rockfalls that would block access and prevent full evacuation of personnel.

1.15 Recovery Methods

The process plant was designed using conventional processing unit operations. It will treat 750 tons/d or 34 tons/hour based on an availability of 7,998 hours per annum or 91.3%. The crushing section design is set at 70% availability and the gold room availability is set at 52 weeks per year including two operating days and one smelting day per week. The plant will operate with two shifts per day, 365 days per year, and will produce doré bars.

The plant feed will be hauled from the underground mine to a mobile crushing facility that will include a jaw crusher as the primary stage and a cone crusher for secondary size reduction. The crushed ore will be ground by a ball mill in closed circuit with a hydro-cyclone cluster. The hydro-cyclone overflow with P_{80} of 150 mesh (106 μm) will flow to a leach-carbon-in-leach (CIL) recovery circuit via a pre-

aeration tank. Gold and silver leached in the CIL circuit will be recovered onto activated carbon and eluted in a pressurized Zadra-style elution circuit and then recovered by electrowinning in the gold room. The gold–silver precipitate will be dried in a mercury retort oven and then mixed with fluxes and smelted in a furnace to pour doré bars. Carbon will be re-activated in a carbon regeneration kiln before being returned to the CIL circuit. CIL tails will be treated for cyanide destruction prior to pumping to the tailings storage facility (TSF) for disposal.

The installed power for the process plant will be 4,445 hp and the power consumption is estimated to be 72 kWh/ton processed. Raw water will be pumped from borehole wells to a raw-water storage tank. Potable water will be sourced from the raw water tank and treated in a potable water treatment plant. Gland water will be supplied from the raw-water tank. Process water primarily consist of TSF reclaim water. Reagents will include lime, sodium cyanide, sodium hydroxide, copper sulfate, hydrochloric acid and sodium metabisulfite.

1.16 Project Infrastructure

1.16.1 Infrastructure

Key Project infrastructure as envisaged in the 2020 FS includes: underground mine, including portal and decline; roads; site main gate and guard house; administration building, training, first aid, change house and car park; process plant e-room; crushing area e-room; control room; reagent storage and building; gold room; assay laboratory and sample preparation area; plant workshop and warehouse; truck shop, warehouse, wash pad; fuel facility, fuel storage and dispensing; water wells; 14.4 kV overland power line; fresh water supply and treatment; raw water tank; TSF; WRSF; and explosives magazine.

The main access road will use an existing BLM road to the site. This road is approximately 17 miles long and will be upgraded to include some straightening and widening in portions.

The power supply will initially be from diesel power generators located on site. The diesel power generators will be used for approximately one year during initial construction and the initial mining of the decline. During the construction period a new power line would be constructed along the main access road to site. The power line will provide 5.3 MW of power to site. The power plan includes a 23-mile distribution circuit, a new 69/34.5 kV to 14 MV transformer, and a new 34.5kV 67-amp regulator.

1.16.2 Waste Rock Storage Facilities and Borrow Pits

During operation, a lined stockpile of waste rock will be managed on the surface to be used as CRF as needed. The containment and drainage collection systems installed below the WRSF will be the same systems used for the TSF impoundment basin.

A borrow pit will be located on the east side of the mine area where there are basalts that are believed to be suitable for construction, mine-backfill and reclamation materials. A small borrow pit north of the processing area is planned for additional construction material. Borrow material will be generated using contract mining.

1.16.3 Tailings Storage Facility

The proposed TSF will cover approximately 108 acres and will be located in a broad valley immediately west of the Grassy Mountain mine portal and process facilities. The TSF will fill the valley and require embankments on the north and west sides to impound the tailings. The main embankment will cross the natural drainage on the north side of the TSF, and a secondary embankment will be constructed along the western ridge. The TSF design envisages three stages, Stage 1 will be split into two intermediate phases.

Based on the TSF design, the Stage 3 TSF will provide a total storage capacity of 3.67 Mtons. However, for the purposes of the 2020 FS, only 2.07 Mtons are planned to be delivered to the TSF. Therefore, only Stages 1 and 2 are required for the 2020 FS.

The TSF is designed as a “zero discharge” facility, capable of storing runoff from tributary areas and direct precipitation on the facility resulting from the 500-year, 24-hour storm event, as well as an allowance for wave run-up due to wind action. It will be a 100% geomembrane-lined facility with a continuous, engineered lining system extending across the impoundment basin and the upstream slope of the embankments.

A lined reclaim pond, to be located downstream (north) of the TSF, will capture all tailings draindown collected in the underdrain collection system from the tailings and WRSF draindown. A supernatant pool will be maintained away from the embankments on the eastern side of the TSF by controlled deposition of tailings from spigots installed around the perimeter of the facility.

1.16.4 Water Management

Contact and non-contact surface water will be routed around the plant site:

- Non-contact water runoff is designed to flow into natural drainages downstream of the site to unnamed tributaries of Negro Rock Canyon which in turn discharges to the lower Malheur River;
- Meteoric water contacting the process plant site and associated infrastructure will be diverted through contact water diversion ditches and channels to a geomembrane-lined contact water pond to be located east of the process plant

Permanent channels are designed to convey the 100-year, 24-hour storm event with 9 inches of freeboard, or 500-year, 24-hour storm event without overtopping. Temporary channels were designed to convey the 25-year, 24-hour storm event with nine inches of freeboard, or 100-year, 24-hour storm event without overtopping.

1.16.5 Water Balance

Water supply from the raw water production wells and mine dewatering is projected to be sufficient to support the 2020 FS mine plan requirements and during seasonal fluctuations. Water demands are expected to increase and decrease seasonally and during periods of extended dry and wet climactic years, respectively. During periods of extended dry conditions, additional make-up water from the production wells may be required.

1.17 Environmental Studies, Permitting, and Social or Community Impact

1.17.1 Overview

Permitting activities began in 2012 with engagement with the State of Oregon and collection of baseline data. In November 2019, Calico submitted a Consolidated Permit Application to the Department of Geology and Mineral Industries (DOGAMI). DOGAMI determined that additional information was necessary to complete the application. Calico submitted an updated Plan of Operations (PoO) to the Bureau of Land Management (BLM) in September 2017. In February 2020, a revision to the PoO was submitted to the BLM. The BLM also determined that additional information was necessary to complete the PoO. The PoO assumes approximately 320 acres of proposed surface disturbance.

1.17.2 Environmental Considerations

Calico has been conducting baseline data collection for nine years for environmental studies required to support the State and Federal permitting process. A total of 22 baseline studies are required by the

BLM and one additional study is required by the State. To date all have been completed and filed. Results indicate limited biological and cultural issues, air quality impacts appear to be within State of Oregon standards, traffic and noise issues are present but at low levels, and socioeconomic impacts are positive. Both BLM and DOGAMI have provided comments and request that will be addressed in a new submission.

The Grassy Mountain Project waste rock shows variable geochemical behavior and each material type has a wide range of sulfide content and predicted acid generation from the static test results. Overall, the waste rock has very limited acid neutralizing capacity.

1.17.3 Closure and Reclamation

A closure plan and RCE were submitted to both the BLM and DOGAMI as part of the Consolidated Permit Application and PoO Application, respectively. DOGAMI indicated that additional information is needed for the RCE and the BLM has not completed their final review of the RCE. The bond estimate included in the costs for the 2020 FS is approximately \$6.3 M.

1.17.4 Permitting Considerations

The Project will require the following major environmental permits to construct, operate, and close:

- A PoO from the BLM;
- A DOGAMI Consolidated Permit for Mining Operations;
- An Oregon Department of Environmental Quality (ODEQ) Chemical Mining Permit;
- Water rights from the Oregon Department of Water Resources;
- An Air Quality Operating Permit (AQOP) with the ODEQ;
- A Conditional Use Permit from Malheur County.

The proposed mining operation will not require either a Federal National Pollutant Discharge Elimination System Permit (NPDES) from the EPA or US Army Corps of Engineers 404 Dredge and Fill Permit. The Project does not involve a discharge to Waters of the US and nor does it involve construction in wetlands or placement of dredge tailings or fill material into Waters of the US. However, the Project does require a PoO approval from the BLM. Submittal of the Grassy Mountain PoO Application was in September 2017. A revised PoO was submitted to the BLM in February 2020. The BLM has requested additional details and Calico is working on acquiring the information and updating the PoO.

The BLM has stated that the National Environmental Policy Act (NEPA) review process for this Project will be an environmental impact statement (EIS).

The key components of the Calico permitting program with the State of Oregon are as follows:

- Environmental baseline studies for all resource categories described in Chapter 632, Division 37 Chemical Process Mining Rules;
- Meeting all requirements of Division 37 Rules which include, but are not limited to: 1) preparation of a Consolidated Permit Application; 2) obtaining all necessary Federal, State, and local permits and authorizations; and 3) satisfying any potentially applicable environmental evaluation requirements;
- Implementing a pro-active community involvement and consultation process including: 1) local hire preference; 2) local contracting and purchase were practicable; and 3) mine worker job training to provide an experienced workforce.

Calico entered into a Memorandum of Understanding for Cost Recovery (MOU) with the Oregon DOGAMI on November 3, 2014. A new MOU was signed when the Consolidated Permit Application was submitted in November 2019. The MOU provides a mechanism whereby Calico, as the Project proponent, agrees to reimburse DOGAMI and other primary State agencies for their involvement in processing the Consolidated Permit Application for the Grassy Mountain Project when those fees exceed their permit fees. In addition, DOGAMI hired consulting firms to provide expertise that is not available from the staff that the various agencies are involved with during the permitting process.

Calico has filed multiple Notices of Intent (NOIs) that initiate the State permitting process and begin baseline data collection. DOGAMI administrators and an interagency Technical Review Team reviewed and approved the Calico Resources *Environmental Baseline Work Plans Grassy Mountain Mine Project*, which was filed on May 17, 2017. In July 2017 a "Notice of Prospective Applicant's Readiness to Collect Baseline Data" was issued to Calico by DOGAMI. The environmental baseline data collection and reporting program is currently in progress, with four reports still requiring acceptance by the interagency Technical Review Team.

Calico prepared and submitted the Division 37 Consolidated Permit Application for the Grassy Mountain Gold Mine in November 2019. DOGAMI finished their completeness review with input from the interagency Technical Review Team. DOGAMI determined that additional information is necessary before further processing of the application. DOGAMI will direct a third-party contractor to prepare an Environmental Evaluation (EE), which is to be issued at least 60 days prior to the issuance of any draft permits. Concurrent with this assessment, DOGAMI will also use the contractor to prepare a Socioeconomic Analysis. This process for permit review and approval will also involve a consolidated public hearing on all draft permits, and the draft operating permit.

Additional permits that will be required by the State include permits to appropriate groundwater or surface water, or to store water in an impoundment; water pollution control facility, storm water pollution prevention plan; air quality permits; solid waste disposal permit; permit for placing explosives; hazardous waste storage permit; land use permit; and any other State permits, if applicable and required under Division 37.

1.17.5 Social Considerations

Social and community impacts have been and are being considered and evaluated for the various PoO amendments performed for the Project in accordance with the NEPA and other Federal laws, and the State of Oregon Socioeconomic Analysis. Potentially-affected Native American tribes, tribal organizations and/or individuals are consulted during the preparation of all PoO amendments to advise on the proposed projects that may have an effect on cultural sites, resources, and traditional activities. Potential community impacts to existing population and demographics, income, employment, economy, public finance, housing, community facilities and community services will be evaluated for potential impacts as part of the State of Oregon and the NEPA process.

1.18 Markets and Contracts

The proposed Grassy Mountain operation will produce doré bars on site, which will then be shipped to an out of State refinery. There is currently no contract in place with any refinery or buyer for the doré.

No market studies have been completed. Gold and silver are freely-traded commodities. The doré that will be produced by the mine is considered to be readily marketable.

Metal pricing used in the economic analysis is based on a two-year trailing average, and forecasts \$1,471.59/oz Au and US\$16.64/oz Ag. Based on financial institution and COMEX futures forecasts, there is potential upside for the Project if the elevated gold prices predicted in those forecasts occur during the Project production period

Paramount has no current contracts for property development, mining, concentrating, smelting, refining, transportation, handling, sales and hedging, forward sales contracts or arrangements.

1.19 Capital Costs

The capital cost estimate has an accuracy of ±15%. The estimate includes the cost to complete the design, procurement, construction and commissioning of all the identified facilities. The estimate was based on the traditional engineering, procurement and construction management (EPCM) approach where the EPCM contractor would oversee the delivery of the completed project from detailed engineering and procurement to handover of a working facility.

The estimate was derived from a number of fundamental assumptions as indicated in process flow diagrams, general arrangements, mechanical equipment list, electrical equipment list, material take offs (MTOs), cable schedules, scope definition and a work breakdown structure. The estimate included all associated infrastructure as defined by the scope of work.

The initial capital cost estimate is summarized in Table 1-3.

Table 1-3: Initial Capital Cost Estimate Summary (direct and indirect)

Cost Type	Description	US\$ M
Direct	Mine	10.7
	Site development	4.0
	Mineral processing	23.4
	Tailings management & waste rock facility	6.0
	On-site infrastructure	12.2
	Off-site infrastructure	9.1
	<i>Direct Subtotal</i>	<i>65.4</i>
Indirect	Indirects	14.3
	Provision (contingency)	10.1
	Owners Costs	7.7
	<i>Indirect Subtotal</i>	<i>32.1</i>
<i>Project Total – Initial Capital</i>		<i>97.5</i>

1.20 Operating Costs

The operating cost estimate has an accuracy of ±15%.

The LOM underground mining costs are estimated at \$120.5 million over the LOM, and will average about \$58.23/ton milled over the LOM.

The LOM process operating cost is estimated at \$57.5 million over the LOM, and will average \$27.77/ton milled over the LOM.

The LOM general and administrative (G&A) cost is estimated at \$29.9 million over the LOM, and will average \$14.42/ton milled over the LOM.

1.21 Economic Analysis

The results of the economic analyses discussed in this section represent forward-looking information as defined under Canadian securities law. The results depend on inputs that are subject to a number

of known and unknown risks, uncertainties, and other factors that may cause actual results to differ materially from those presented herein. Information that is forward-looking includes the following:

- Proven and Probable Mineral Reserve estimates which have been modified from Measured and Indicated Mineral Resource estimates;
- Assumed commodity prices and exchange rates;
- Proposed mine production plan;
- Projected mining and process recovery rates;
- Assumptions about mining dilution;
- Sustaining costs and proposed operating costs;
- Assumptions as to Seabridge's intentions to convert the NPI royalty into Paramount equity upon Paramount securing sufficient construction capital;
- Assumptions as to closure costs and closure requirements;
- Assumptions as to environmental, permitting, and social risks;

Additional risks to the forward-looking information include:

- Changes to costs of production from what is assumed;
- Unrecognized environmental risks;
- Unanticipated reclamation expenses;
- Unexpected variations in quantity of mineralized material, grade or recovery rates;
- Geotechnical or hydrogeological considerations during mining being different from what was assumed;
- Failure of mining methods to operate as anticipated;
- Failure of plant, equipment or processes to operate as anticipated;
- Changes to assumptions as to the availability of electrical power, and the power rates used in the operating cost estimates and financial analysis;
- Ability to maintain the social license to operate;
- Accidents, labor disputes and other risks of the mining industry;
- Changes to interest rates;
- Changes to tax rates.

Calendar years used in the financial analysis are provided for conceptual purposes only. Permits still have to be obtained in support of operations; and approval to proceed is still required from Paramount's Board of Directors.

An economic model was developed to estimate annual pre-tax and post-tax cash flows and sensitivities of the project based on a 5% discount rate. Tax estimates involve complex variables that can only be accurately calculated during operations and, as such, the after-tax results are approximations. The economic analysis was run on a constant dollar basis with no inflation.

The economic analysis was performed using the following assumptions:

- Gold price of US\$1,472/oz, silver price of US\$16.64/oz;

- Construction period of 18 months beginning March 1, 2022;
- All construction costs are capitalized;
- Commercial production starting (effectively) on September 1, 2023;
- LOM of 7.8 years;
- Cost estimates in constant Q3 2020 US dollars with no inflation or escalation;
- Capital costs funded with 100% equity (no financing costs assumed);
- All cash flows discounted to the start of construction;
- Metal is assumed to be sold in the same year it is produced;
- No contractual arrangements for refining currently exist;
- Closure cost of \$6.3 million;
- 1.5% royalty, resulting in approximately \$8.1 million in undiscounted royalty payments over the LOM;
- US Federal corporate income tax rate of 21%; Oregon tax rate of 7.6% for net proceeds of more than \$1 million; giving total undiscounted tax payments of \$26.3 million over the LOM.

The pre-tax net present value (NPV) discounted at 5% is \$123.3 million; the internal rate of return (IRR) is 27.9%; and payback period is 3.1 years. On an after-tax basis, the NPV discounted at 5% is \$105.2 million; the IRR is 26%; and the payback period is 3.1 years.

A summary of Project economics provided in Table 1-4.

Table 1-4: Summary of Project Economics

Area	Item	Units	LOM Total/Avg
General	Gold price	US\$/oz	1,472
	Silver price	US\$/oz	16.64
	Mine life	years	7.8
	Total mill feed tons	tons x 1,000	2,070
Production (gold)	Mill head grade Au	oz/ton	0.19
	Mill recovery rate Au	%	92.8
	Total mill ounces recovered Au	oz x 1,000	361.8
	Total average annual production Au	oz x 1,000	46.6
Production (silver)	Mill head grade Ag	oz/ton	0.28
	Mill recovery rate Ag	%	73.5
	Total mill ounces recovered Ag	oz x 1,000	424.8
	Total average annual production Ag	oz x 1,000	54.5
Operating Costs	Mining cost	US\$/ton mined	58.2
	Processing cost	US\$/ton milled	27.8
	G&A cost	US\$/ton milled	14.4
	Total operating costs	US\$/ton milled	100.4
	Refining cost Au	US\$/oz	5.0
	Refining cost Ag	US\$/oz	0.5

Area	Item	Units	LOM Total/Avg
	*Cash costs net of by-products	US\$/oz Au	584
	**AISC net of by-products	US\$/oz Au	672
Capital Costs	Initial capital	US\$ M	97.5
	Sustaining capital	US\$ M	25.6
	Closure costs	US\$ M	6.3
Financials(pre-tax)	Pre-tax NPV	5%	123.2
	Pre-tax IRR	%	27.9
	Pre-tax Payback	years	3.1
Financials(post-tax)	Post-tax NPV	5%	105.2
	Post-tax IRR	%	26.0
	Post-tax Payback	years	3.1

Notes: * Cash costs consist of mining costs, processing costs, mine-level G&A and refining charges and royalties. ** All-in sustaining costs (AISC) includes cash costs plus sustaining capital and closure costs. AISC is at the Project-level and does not include an estimate of corporate G&A.

1.22 Sensitivity Analysis

A sensitivity analysis was conducted on the base case pre-tax and after-tax NPV and IRR, using the following variables: gold price, mill head grades, initial capital cost, operating cost, metallurgical recovery, and discount rate.

The analysis showed that the Project is most sensitive to, in order from most to least sensitive: gold price; mill head grade; metallurgical recovery rates; initial capital cost; discount rate; and operating cost.

In the event that Seabridge does not convert its NPI into equity, the NPV would be reduced by \$3.6 million to \$101.5 million from the base case of \$105.2 million.

1.23 Risks and Opportunities

1.23.1 Risks

1.23.1.1 Project Setting

Unlike States such as Nevada and Arizona, Oregon does not have a strong mining background. The Project may encounter a lack of mining skills and expertise at the local level, which could affect Paramount’s ability to operate using local labour, until Paramount has trained sufficient local staff to suit Project requirements. There may also be effects on the Project caused by a lack of familiarity with Mine Safety and Health Administration (MSHA) requirements at the local and State levels and at the local staff operator level, which may in turn lead to safety incidents. Such incidents could result in Project delays and affect the permitting process.

1.23.1.2 Mining

There is a risk that the estimated mining costs may not be achievable if additional support over that contemplated in the 2020 FS is required due to the Poor quality rock mass.

1.23.1.3 Infrastructure

Delays in the proposed access road upgrade may result in delays to the Project schedule.

Delays in the power line installation including the substation upgrade may result in delays to the Project schedule. The Project power requirements are relatively modest, and there is a risk that the selected power provider may not wish to supply the Project. There is a risk that the power costs may be higher than anticipated in the 2020 FS in that instance.

Water supply is envisaged to be partly from groundwater sources. Additional production wells may be required to support operations, which will require permitting. In addition, well productivity may not be as envisaged, which may affect both the volume of water available for operations and the number of wells that must be pumped.

A schedule was developed for TSF construction. Weather-related delays may impact that schedule and cause delays to the Project schedule.

If additional borrow areas are required for construction and reclamation of the TSF that are more distant than contemplated in the 2020 FS, then reclamation construction costs of the TSF will increase as compared to the costs estimated in this Report.

Construction work in Oregon is seasonal. Poor weather during the construction season may result in delays to the Project schedule.

The operations were planned to have a small site footprint. However, this carries a risk during construction, as logistics within a small site footprint become more complicated. Care will need to be taken by the construction management team that Project logistics are carried out safely and economically.

1.23.1.4 Environmental, Permitting and Social

Changes to the permitting environment as envisaged in the 2020 FS may result in Project changes being required by the permitting agencies. Such changes may result in additional capital costs or increases in operating costs.

The State and Federal governments will need to agree on the level of reclamation bonding required for the Project. Currently both levels of government require reclamation bonds to be posted. There is a move to co-ordinate the bonding so only a single bond is required. However, if the two levels of government are not in agreement, this could cause delays in Project permitting, and delays in obtaining the social license to operate. It may also result in Paramount being required to post additional bonding to that envisaged in the 2020 FS.

If non-governmental organizations object to the Project as envisaged in the 2020 FS, a number of risks may result. These could include additional capital costs or increases in operating costs, delays in Project permitting, and delays in obtaining the social license to operate.

Four baseline study areas still require update and acceptance by DOGAMI, including groundwater, geochemistry, cultural, and wildlife. If additional data collection is required for these areas, that may result in delays in Project permitting, and delays in obtaining the social license to operate. There is also potential for restrictions to be placed on any environmental permits that are granted. If any protected flora and fauna are identified in the wildlife surveys, Paramount may be required to develop mitigation plans for the affected species. This could include acquisition of suitable habitat/land to offset proposed disturbances, which would increase Project capital costs.

1.23.1.5 Economic Analysis

The economic analysis is based on taxation and policy considerations at the Report effective date. Any policy or taxation changes will affect the cashflow analysis. Such changes could be either positive or negative, depending on the change.

1.23.1.6 Operational Readiness

Mining is cyclical, and during an up-cycle, it can be difficult for any mining operation to attract quality staff. There is a risk to Paramount if such staff cannot be found to support the Owner's team.

Paramount currently has no active operations. There is a risk that this lack of familiarity with the operational environment, particularly in Oregon, could result in unexpected Project delays or cost increases.

1.23.2 Opportunities

1.23.2.1 Mining

The mine plan and cut-off grades used for the 2020 FS are based on conservative metal prices. There may be upside for the Project if the higher metal pricing seen in late 2020 continues. A higher metal price would potentially result in additional material meeting the cut-off grade criteria and being available to potentially convert to Mineral Reserves, thereby providing additional metal production and potentially, extending the mine life.

1.23.2.2 Infrastructure

The mine plan requires sources of aggregate and borrow materials in support of road construction and CRF. Private sources for gravel construction along the access route may be obtainable. There may also be an opportunity to source borrow material from local sources. This could lead to more simplified permitting for the development of these sources, and it could potentially reduce costs of the gravel for the access-road construction and borrow materials for CRF.

1.23.2.3 Capital and Operating Costs

There may be an opportunity to reduce some of the capital costs envisaged in the 2020 FS, if some equipment or buildings can be purchased second-hand.

The cost of geosynthetic materials may be able to be reduced if these materials are purchased direct from the manufacturer or vendor.

1.24 Interpretation and Conclusions

Based on the assumptions and parameters presented in this Report, the 2020 FS shows positive economics.

1.25 Recommendations

1.25.1 Introduction

A single work phase is proposed, set out by discipline area in the following sub-sections. All items within the work phase can be completed concurrently. The estimated budget to complete the work program is approximately \$943,000.

1.25.2 Mining

Recommendations include additional optimization of the mine design and underground production, including determination of an optimal gold price, further analysis of the underground equipment types and sizes to identify possible improvements to the economics and efficiencies, and should the permitting process require alternative mine plans with alternative mining methods, an evaluation of sublevel caving and sublevel shrinkage should be completed.

1.25.3 Tailings Storage Facility and Borrow Pits

The proposed closure cover borrow areas should be further investigated to verify and confirm that materials of sufficient quantity and quality are available for reclamation construction of the TSF.

1.25.4 Hydrology

An additional water well should be drilled and be subject to pumping tests to confirm the water flow available from the water well.

1.25.5 Geotechnical

Recommendations include:

- Use a geotechnical classification for zones of weak rock mass during logging and mapping;
- Identify structural domains to document where wedge fall failures are likely;
- Geotechnically characterize the vein/faults and document strength properties and mean thicknesses;
- Complete a seismic hazard study;
- Evaluate a conservative empirical design case using Q' values within two standard deviations;
- Conduct a pillar dimensioning and stability analysis;
- Complete a limit equilibrium analysis;
- Test CRF strength resistance in response to changes in the cement and fly ash percentages in an attempt to reduce the amount of cement that may be required;
- Install reinforcements at an oblique angle to intersect the vertical joints so as to improve shear resistance;
- Measure wall response in permanent and temporary excavations during excavation to develop a better understanding of the interaction between bolts, cablebolts and the rock mass;
- Prepare a geotechnical risk model to provide alternate mine plans to ensure continued ore delivery;
- Conduct a three-dimensional numerical analysis of the timeframes assumed for excavation and backfill on a month-by-month basis;
- Avoid the use of rib pillars that are lower than three drifts wide in drift excavations under rock mass environments;
- Calculate the safety factor as part of the numerical model update;
- Prepare a detailed monitoring plan for underground operations that will include surface displacement monitoring;
- Investigate the application of pre-splitting blasting process or smooth blasting processes;

- Avoid blasting beside drifts that have recently been backfilled or where the CRF still undergoing the curing process;
- Complete a vibrations study;
- Quantify the effect of blasting on the weak rock mass;
- Organize a workshop to review the mine plan and geotechnical assumptions to ensure stability between drifts and mine levels;
- Construct a 2D numerical model to assess stability and deformation during the excavation process.

1.25.6 Resource Model

The current lithologic model has not been fully rectified three-dimensionally. To support an active mining operation, a fully rectified lithological model is recommended.

2 INTRODUCTION

2.1 Introduction

Ausenco Canada Inc. (Ausenco), Mine Development Associates Inc., a division of RESPEC (MDA), EM Strategies Inc., (EM Strategies), Golder Associates Inc (Golder) and Geotechnical Mine Solutions (GMS) compiled a technical report (the Report) on a feasibility study (the 2020 FS) completed on the Grassy Mountain Project (the Project) for Paramount Gold Nevada Corp. (Paramount), located in Oregon, USA (Figure 2-1).

Paramount holds its Project interest through a wholly-owned subsidiary, Calico Resources USA Corp. (Calico).

2.2 Terms of Reference

The Report supports disclosures by Paramount in the news release dated 15 September, 2020, entitled “Paramount Gold’s feasibility study confirms economic viability of the proposed Grassy Mountain gold mine with an after-tax NPV of \$105 million”.

Measurement units used in this Report are generally US customary; however, some units, such as analytical and metallurgical testwork units may be in metric units. Unless otherwise stated, all monetary amounts are in United States dollars (US\$).


Mineral Resources and Mineral Reserves are reported in accordance with the Canadian Institute of Mining, Metallurgy and Petroleum (CIM) Definition Standards for Mineral Resources and Mineral Reserves (May 2014; the 2014 CIM Definition Standards).

2.3 Qualified Persons

This Report was prepared by the following Qualified Persons (QPs):

- Mr. Tommaso Roberto Raponi, P. Eng., Principal Metallurgist, Ausenco
- Mr. Michael Gustin, CPG., Senior Geologist, MDA;
- Mr. Joseph Seamons, P.E., Senior Staff Engineer, MDA;
- Mr. Richard DeLong, MMSA QP, President and Principal Scientist, EM Strategies;
- Mr. Christopher MacMahon, P.E., Associate Senior Engineer, Golder;
- Mr. Leonardo Palma, RM CMC, Principal Mining Engineer, GMS.

Figure 2-1: Project Location Plan

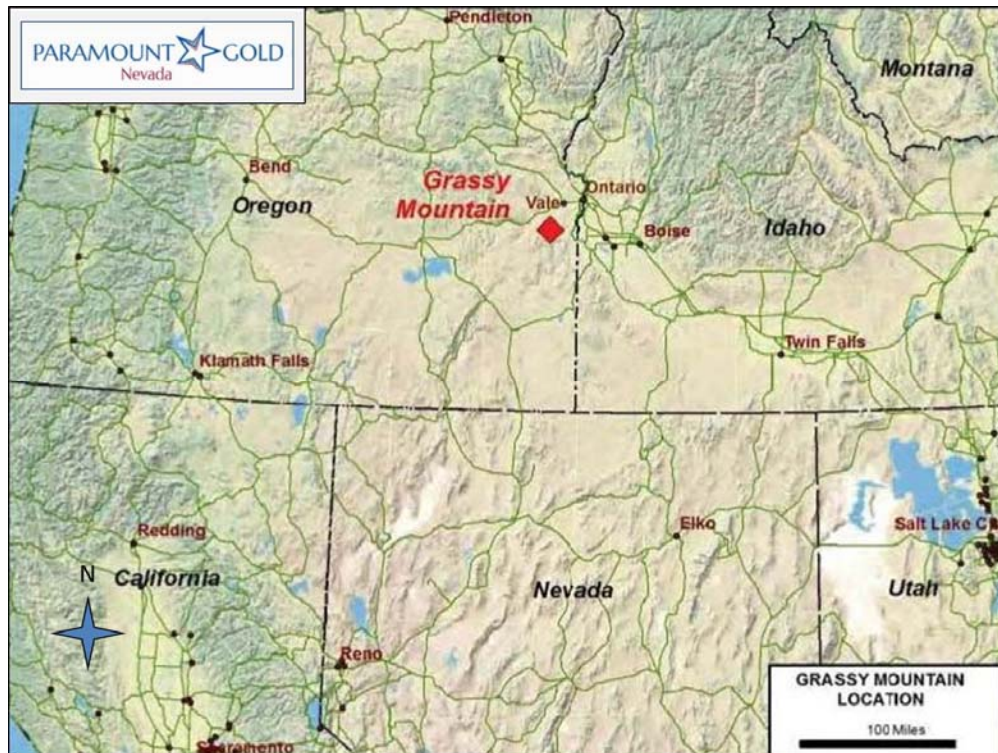

Note: Figure from Gustin et al., 2018.

2.4 Site Visits and Scope of Personal Inspection

Mr. Raponi conducted a site visit on 15 August 2019 and inspected the area planned for the portal and the general site layout.

Mr. Gustin visited the Project site on August 18, 2016, November 17, 2016, and June 1, 2018. During these visits, Mr. Gustin reviewed altered and sometimes mineralized outcrops throughout the Grassy Mountain deposit area, as well as other areas within and outside of Paramount's landholdings. Active core and RC drill sites with ongoing sampling and logging were also visited. Each of the three site visits included additional days at the Vale field office inspecting drill core from a number of holes and reviewing all Project procedures related to logging, sampling, and data capture.

Mr. Seamons conducted a site visit on 15 August 2019 and inspected the area planned for the portal and the general site layout.

Mr. DeLong conducted a site visit for a day in the period March 2016 to October 2017. During that visit he discussed the planned mine facilities relative to topographic conditions.

Mr. MacMahon conducted a visit to the Project site on August 18, 2016, which was led by senior technical staff from Paramount. This site visit provided a general overview of the Grassy Mountain deposit area, including access to the Project, potential surface infrastructure locations, and the site of the proposed portal for the underground mine access. The site visit included additional time at Paramount's core storage and field office facilities in Vale, Oregon, which was used to further review technical aspects of the Project.

2.5 Effective Dates

The Report has a number of effective dates as follows:

- Date of supply of last information on mineral tenure, surface rights and agreements: 22 October 2020;
- Date of close-out of database that supports the Mineral Resource estimates: 1 May 2018;
- Mineral Resource estimates: 31 March 2020;
- Mineral Reserve estimate: 10 July 2020;
- Date of financial analysis that supports the Mineral Reserves: 15 September 2020.

The overall effective date of this Report is the effective date of the financial analysis which is 15 September 2020.

2.6 Information Sources and References

The Report is primarily based on the 2020 FS and supporting memoranda and trade-off studies. This Report is also based in part on internal company reports, maps, published government reports, and public information, as listed in Section 27 of this Report. It is also based on the information cited in Section 3.

Additional information was sought from Paramount employees in their areas of expertise as required.

2.7 Previous Technical Reports

Paramount has previously filed the following technical report on the Project:

- Gustin, M.M., Dyer, T.L., MacMahon, C., Caro, B., Raponi, T.R., and Baldwin, D., 2018: Preliminary Feasibility Study and Technical Report for the Grassy Mountain Gold and Silver Project, Malheur County, Oregon, USA: report prepared by Mine Development Associates, Golder Associates and Ausenco Canada Inc. for Paramount Gold Nevada Corp., effective date 21 May, 2018.

Prior to Paramount's Project interest, the following technical reports were filed on the Project:

- Wilson, S.E., Pennstrom, W.J. Jr., Batman, S.B., and Black, Z.J., 2015: Amended Preliminary Economic Assessment, Calico Resources Corp., Grassy Mountain Project, Malheur County, Oregon, USA: report prepared by Metal Mining Consultants Inc. for Calico Resources Corp., effective date 13 January 2015, amended 9 July, 2015;
- Brown, J.J., Malhotra, D., and Black, Z., 2012: NI 43-101 Technical Report on Resources, Grassy Mountain Gold Project, Malheur County, Oregon: report prepared by Gustavson Associates for Calico Resources Corp., effective date September 26, 2012;
- Hulse, D.E., Brown, J.J., and Malhotra, D., 2012: NI 43-101 Technical Report on Resources, Grassy Mountain Gold Project, Malheur County, Oregon: report prepared by Gustavson Associates for Calico Resources Corp., effective date March 1, 2012;
- Lechner, M.J., 2011: Grassy Mountain NI 43-101 Technical Report, Malheur County, Oregon: report prepared for Calico Resources Corp., effective date June 6, 2011;
- Lechner, M.J., 2007: Grassy Mountain Technical Report, Malheur County, Oregon: NI 43-101 Technical Report: report prepared for Seabridge Gold Inc., effective date April 27, 2007.

3 RELIANCE ON OTHER EXPERTS

3.1 Introduction

The QPs have relied upon the following reports, which provided information regarding mineral rights, surface rights, property agreements, and royalties for use in sections of this Report.

3.2 Legal Matters

The QPs have not independently reviewed ownership of the Project area and any underlying property agreements, mineral tenure, surface rights, or royalties. The QPs have fully relied upon, and disclaim responsibility for, information derived from legal experts retained by Paramount and on information provided by Paramount through the following documents:

- Erwin, T.P., 2017: Mineral Status Report: report prepared by Erwin, Thompson & Faillers LLP for Paramount Nevada Gold Corp., September 26, 2017, 9 p. plus appendices;
- Van Treek, G., 2020: Technical Report on Grassy Mountain Feasibility Study Project: letter prepared by Paramount Nevada Gold Corp., for Ausenco Canada Inc, 22 October, 2020, 25 p.


This information is used in Section 4 of the Report. The information is also used in support of the Mineral Resource estimate in Section 14, the Mineral Reserve estimate in Section 15, and the financial analysis in Section 22.

4 PROPERTY DESCRIPTION AND LOCATION

4.1 Introduction

Calico, a wholly-owned subsidiary of Paramount, owns and controls 100% of the mineral tenure of the unpatented mining claims, patented mining claims, and mining leases that comprise the Grassy Mountain Project. The Grassy Mountain Project consists of two claims groups that are situated near the western edge of the Snake River Plain in eastern Oregon, 20 miles south of the town of Vale, Oregon and about 70 miles west of Boise, Idaho (refer to Figure 2-1). The Frost Area claims group is located approximately 12 miles southwest of the main Grassy Mountain claims group (Figure 4-1).

Figure 4-1: Location of the Frost Area Claims Group

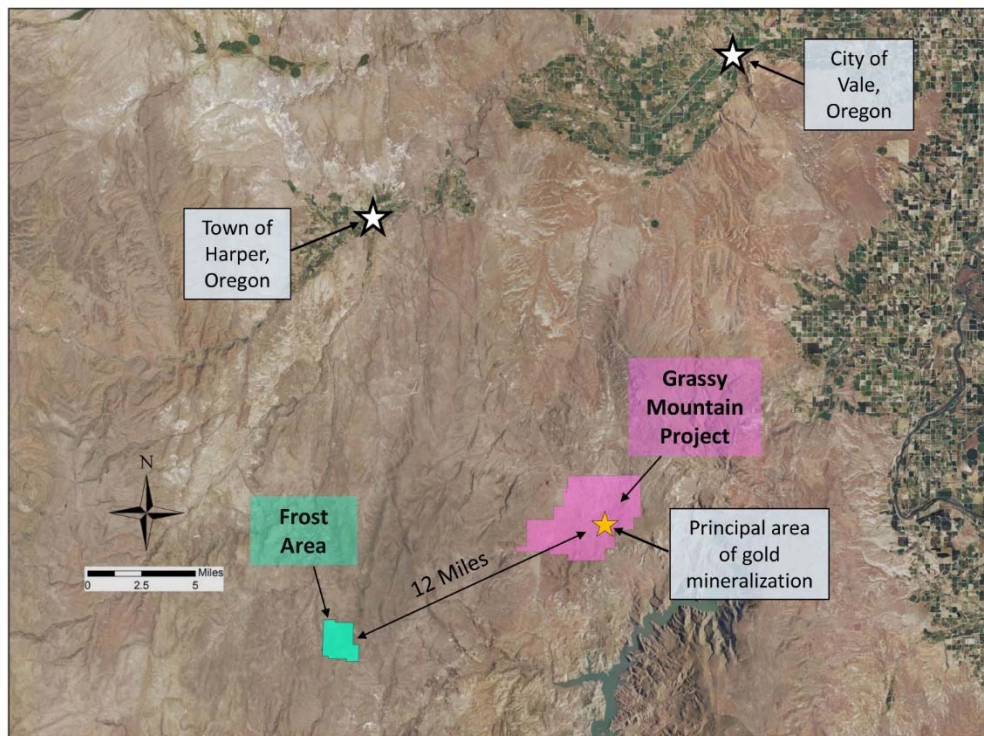

Note: Figure courtesy Paramount, 2020.

The Grassy Mountain claims group encompasses approximately 9,300 acres and, the Frost Area claims group consists of approximately 1,720 acres, all located within surveyed townships in Malheur County.

The geographic center of the Grassy Mountain claims group is located at 43.674° N latitude and 117.362° W longitude, and the principal zone of mineralization, the Grassy Mountain deposit, is located at approximately 43.670° N latitude and 117.359° W longitude. The Frost Area claims group is located at 43.590° N latitude and 117.603 W longitude.

4.2 Mineral Tenure

The Grassy Mountain Project consists of 511 unpatented lode claims, nine unpatented mill site claims, three patented claims, and a land lease for 28 unpatented lode mining claims (Figure 4-2 and Figure 4-3). Patented claims were individually surveyed at the time of location. Unpatented claim boundaries were established initially by handheld global positioning system (GPS) units, and in 2011 by onsite survey work. Claim information is in Appendix A.

Unpatented claims are subject to annual US Bureau of Land Management (BLM) fees of \$165 per claim. The unpatented annual claim fees have been paid and are not due until September 1, 2021. Patented claims are subject to annual property taxes of \$114 per year. Taxes for the 2019–2020 tax year have been paid; taxes for the coming year are due December 2020.

Calico, a wholly-owned subsidiary of Paramount, owns and controls 100% of the mineral tenure of the unpatented mining claims, patented mining claims, and mining leases that comprise the Grassy Mountain Project. Calico acquired all right, title, and interest in the Project pursuant to a “Deed and Assignment of Mining Properties” between Seabridge Gold Inc., Seabridge Gold Corporation (collectively Seabridge), and Calico dated February 05, 2013.

4.2.1 Mineral Concession Payment Terms

Annual property holding costs, including the Cryla LLC (Cryla) and Nevada Select Royalty Inc. (Nevada Select) lease agreements, total \$168,252 (Table 4-1).

4.2.2 Land Access and Ownership Agreements

Paramount’s 100% ownership of the Grassy Mountain Project is subject to the underlying agreements summarized in the following subsections.

4.2.3 Seabridge Gold Corporation

All claims and property were transferred to Calico by Seabridge. Seabridge retained a 10% net profits interest (NPI) royalty in the Grassy Mountain Project pursuant to the “Deed of Royalties” between Calico and Seabridge dated February 5, 2013 and modified in 2015 (see Section 4.3.1).


4.2.4 Sherry and Yates

On February 14, 2018, Calico exercised an Option to Purchase whereby Sherry and Yates agreed to sell to Calico all right, title, and interest in three patented and 37 unpatented mining claims. The 2004 Lease and Agreement with Sherry and Yates was then terminated, although Sherry and Yates retained a royalty over the claims (see Section 4.3.2).

4.2.5 Cryla LLC


In 2018, Calico signed a lease agreement with Cryla that applies to 28 unpatented lode mining claims located to the west of the Grassy Mountain deposit (Figure 4-3). Calico is required to make an annual lease payment of \$60,000. After June 2020, Calico may elect to acquire the property for \$560,000 plus \$3/oz of gold reserves, as defined by a pre-feasibility or higher confidence-level study. Additionally, Cryla retains a royalty for mineral produced from their claims (see Section 4.3.3).

Figure 4-2: Grassy Mountain Claim Group

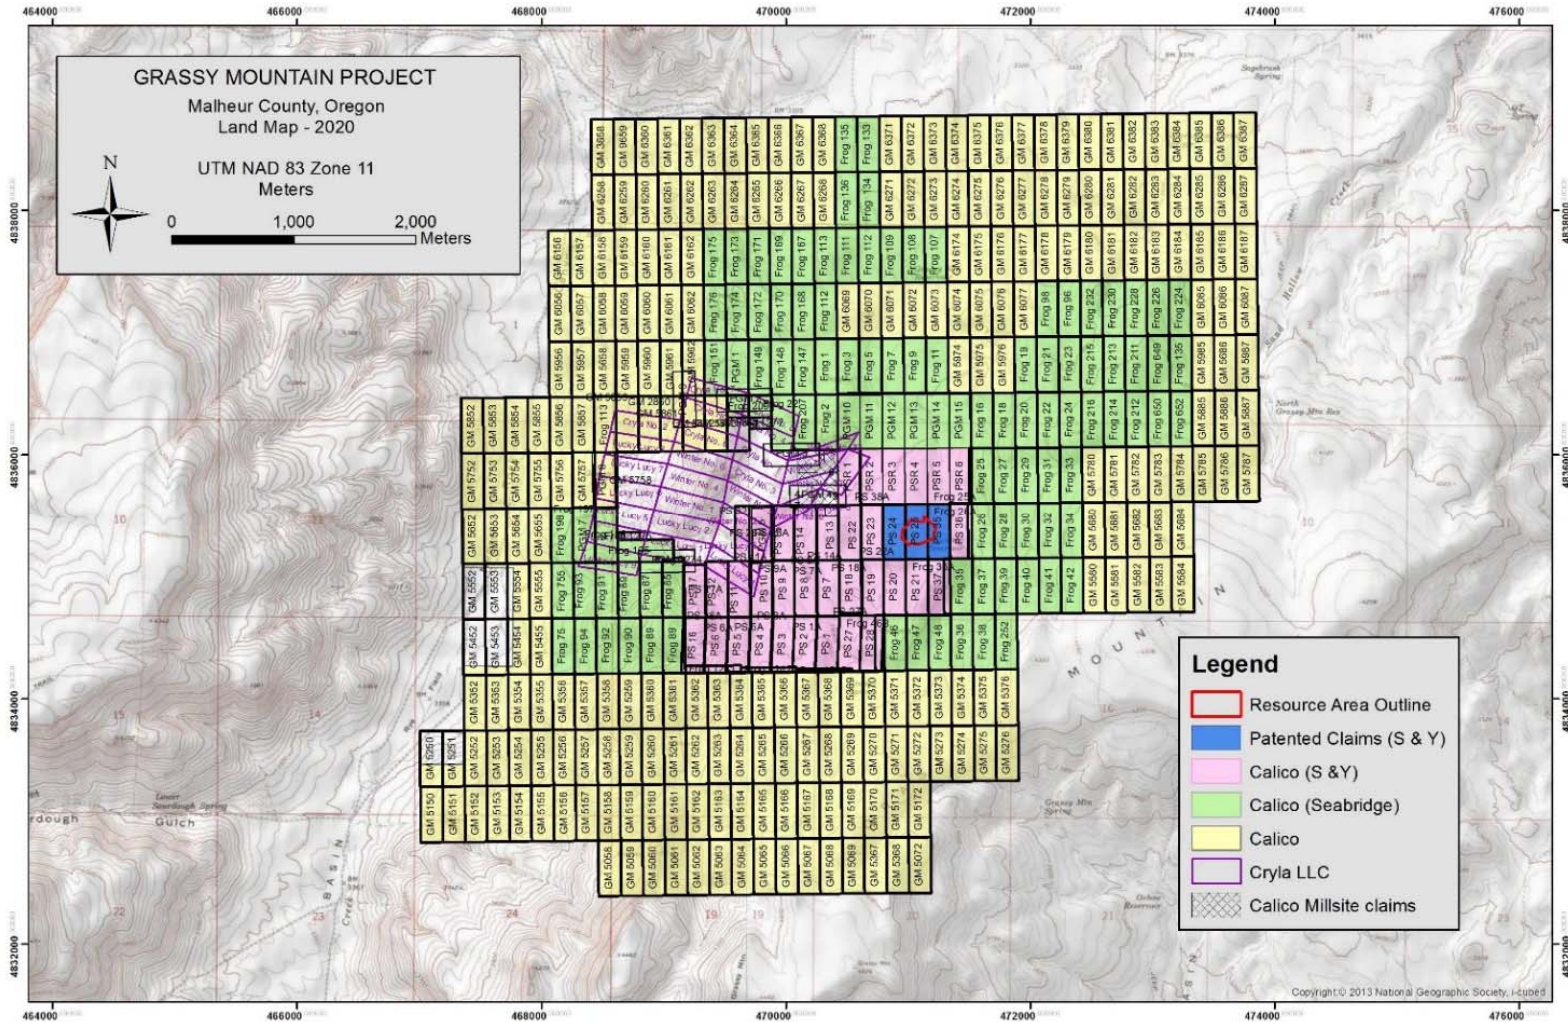

Note: Figure courtesy Paramount, 2020.

Figure 4-3: Frost Area Claims Group Showing Area of Interest

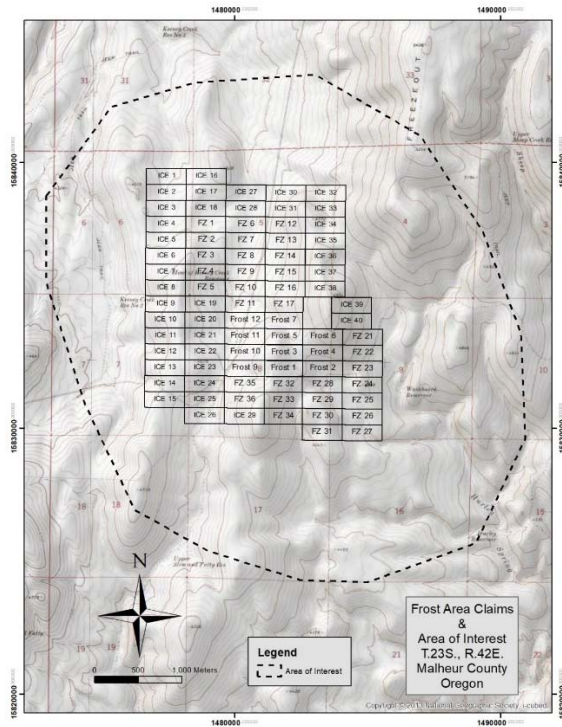

Note: Figure courtesy Paramount, 2020.

Table 4-1: Grassy Mountain Annual 2020 Land Holding Costs

Claims	No. Claims	BLM Fee (US\$)	County Fee (US\$)	Lease (US\$)	Total (US\$)
Calico Unpatented (lode & mill)	436	71,940	2,256		74,196
Calico Patented	3		114		114
Cryla	28	4,620	11	60,000	64,631
Nevada Select (Frost Area claims group)	84	13,860	451	15,000	29,311
Total	551	90,420	2,832	75,000	168,252

4.2.6 Nevada Select Royalty, Inc.

On November 13, 2018, Calico entered into an Option Agreement with Nevada Select Royalty, Inc., whereby Calico can acquire 100% interest in the Frost Area claims group for the total purchase consideration of \$250,000 paid as follows:

- \$10,000 paid at closing, October 22, 2018;
- \$15,000 on the date that Calico receives a permit for drilling on the Frost Area claims group;
- \$25,000 one year after the permit date;
- \$50,000 two years after the permit date;
- \$50,000 three years after the permit date;

- \$100,000 four years after the permit date.

The drilling permit had not been granted as of the effective date of this Report.

4.3 Royalties


4.3.1 Seabridge Gold

Pursuant to the Deed of Royalties, within 30 days following the day that Calico makes a production decision and construction financing is secured, Seabridge may elect to cause Calico to purchase the 10% NPI for C\$10 million. Otherwise, Seabridge will retain the 10% NPI. Seabridge, as of the effective date of this Report, is the second largest Paramount shareholder.

4.3.2 Sherry and Yates

Sherry and Yates closed the purchase and sale of the three patented and 37 unpatented mining claims under terms of the 2004 Lease and option Agreement. Sherry and Yates retain a 1.5% royalty of the gross proceeds for the production of minerals from the patented and unpatented claims and a surrounding ½ mile area of interest (Figure 4-4).

Figure 4-4: Sherry and Yates Area of Interest

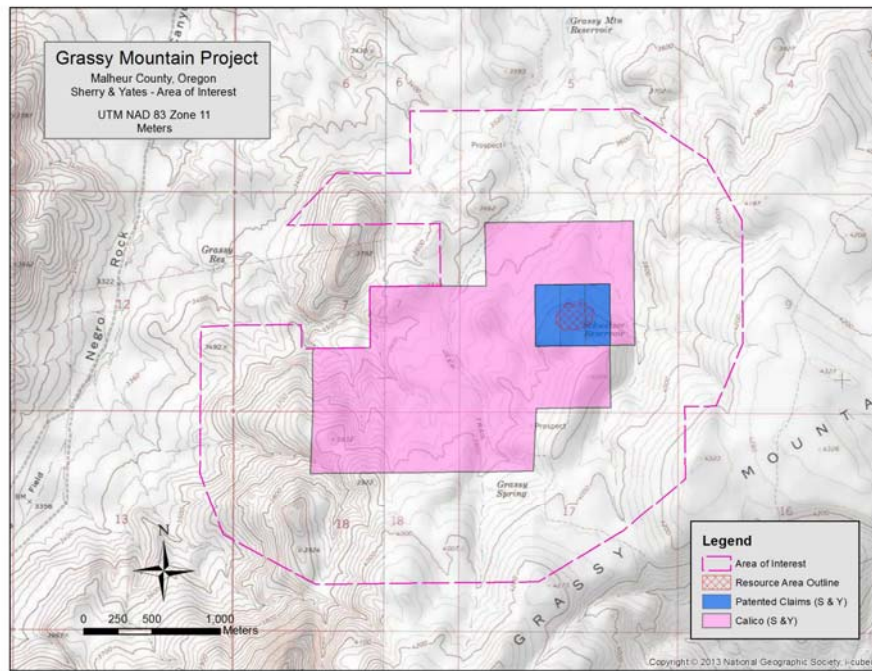

Note: Figure courtesy Paramount, 2020

4.3.3 Cryla

Pursuant to the Deed of Royalties, Cryla is entitled to a NSR royalty on mineral or products produced from their claims group. Cryla is entitled to a 2% NSR if the gold price is ≤US\$1,500/oz and a 4% NSR if the gold price >US\$1,500/oz. Calico is entitled to reduce the NSR to 1% by paying Cryla \$800,000

under any circumstances. The Mineral Resources and Mineral Reserves discussed in this Report are outside the area of the Cryla claims group.

4.3.4 Nevada Select Royalty Inc.

Pursuant to the Deed of Royalties, Nevada Select Royalty retains a 2% NSR royalty for the production of minerals from the Frost Area claims group as well as a surrounding 1-mile area of interest (Figure 4-3). Calico has the right to acquire 1% of the royalty for \$1 million.

4.4 Environmental Liabilities

Except for the exploration surface disturbance, primarily related to drilling, and the network of water wells that will need to be reclaimed, there are no known environmental liabilities associated with the Grassy Mountain project.

All exploration drill holes that are not part of the current approved monitor-well program have been plugged according to Oregon regulations. Surface disturbance that has not been reclaimed will potentially be used for future development activities and access. The groundwater monitoring wells remain in use for ongoing exploration activities and ongoing data-acquisition activities. The disturbance is bonded as described in Section 4.6.

4.5 Environmental Permitting

There is a valid exploration permit with the Department of Geology and Mineral Industries (DOGAMI) and the US Bureau of Land Management (BLM). A bond in the amount of \$146,200 is associated with this exploration permit. An existing Notice (OR-068894) with the BLM for four acres of surface disturbance and a monitor well has an associated bond in the amount of \$28,211.

A Conditional Use Permit from Malheur County was approved by the Malheur County Planning Commission in May 2019.

The tailings storage facility (TSF) dam was approved by the Oregon Water Resources Department in July 2020. The approval is valid for five years, and an extension can be requested.

Permits not obtained but needed for the type and scope of potential mining at Grassy Mountain as outlined in the 2020 FS will involve a number of Federal, State, and local regulatory authorities. The project will require the environmental permits covering the construction, operation, and closure of the envisioned mine as discussed in Section 20.

Further information on environmental studies, permitting, and social and community impacts is discussed in Section 20.

4.6 Surface Rights

Paramount owns the surface rights in the Grassy Mountain deposit area. The deposit is located within three patented mining claims. The surrounding surface rights associated with the locations of the planned Project surface facilities belongs to the Federal government and are managed by the Vale District office of the BLM.

4.7 Water Rights

Paramount holds a water right granted by the Oregon Water Resources Department to Calico. The water right was issued on April 5, 1990 through State of Oregon Water Rights Application G-11847 and Permit G-10994. Use is limited to not more than 2.0 ft³/second (897.6 gallons/ minute) measured at the well.

On December 26, 2012, the Oregon Water Resources Department, Water Rights Services Division, granted Final Order Extension of Time for Permit Number G-10994. This extension extended the date for Calico to fully develop and apply water to beneficial use to October 1, 2028. In 2019, Calico submitted an application to OWRD (T-13157) to modify the points of appropriation and place of use, and to clarify language in the permit. On December 11, 2019, the State of Oregon issued a new Permit to Appropriate the Public Waters (G-18337) that replaces the previous permit and includes the requested modifications. This permit does not change the 2.0 ft³/second of water use allowed.

4.8 Summary Statement


The QP is not aware of any significant factors and risks not discussed in this Report that may affect access, title, or the right or ability to perform work on the Project, although the QP is not an expert with respect to such matters.

5 ACCESSIBILITY, CLIMATE, LOCAL RESOURCES, INFRASTRUCTURE, AND PHYSIOGRAPHY

5.1 Access

Access to the main Grassy Mountain deposit is provided by Twin Springs Road, a seasonally-maintained unpaved road that originates at Russell Road, which is a paved two-lane county road that joins with US Highway 20 approximately 4 miles west of Vale, Oregon. The center of the Project area may be reached from the Twin Springs Road via 2.5 miles of secondary unpaved roads. Winter and wet weather conditions occasionally limit access to the property, although on-site travel is generally possible year-round. Figure 5-1 shows the road access from Vale to the Grassy Mountain claims group.

Figure 5-1: Access to Grassy Mountain Claims Group

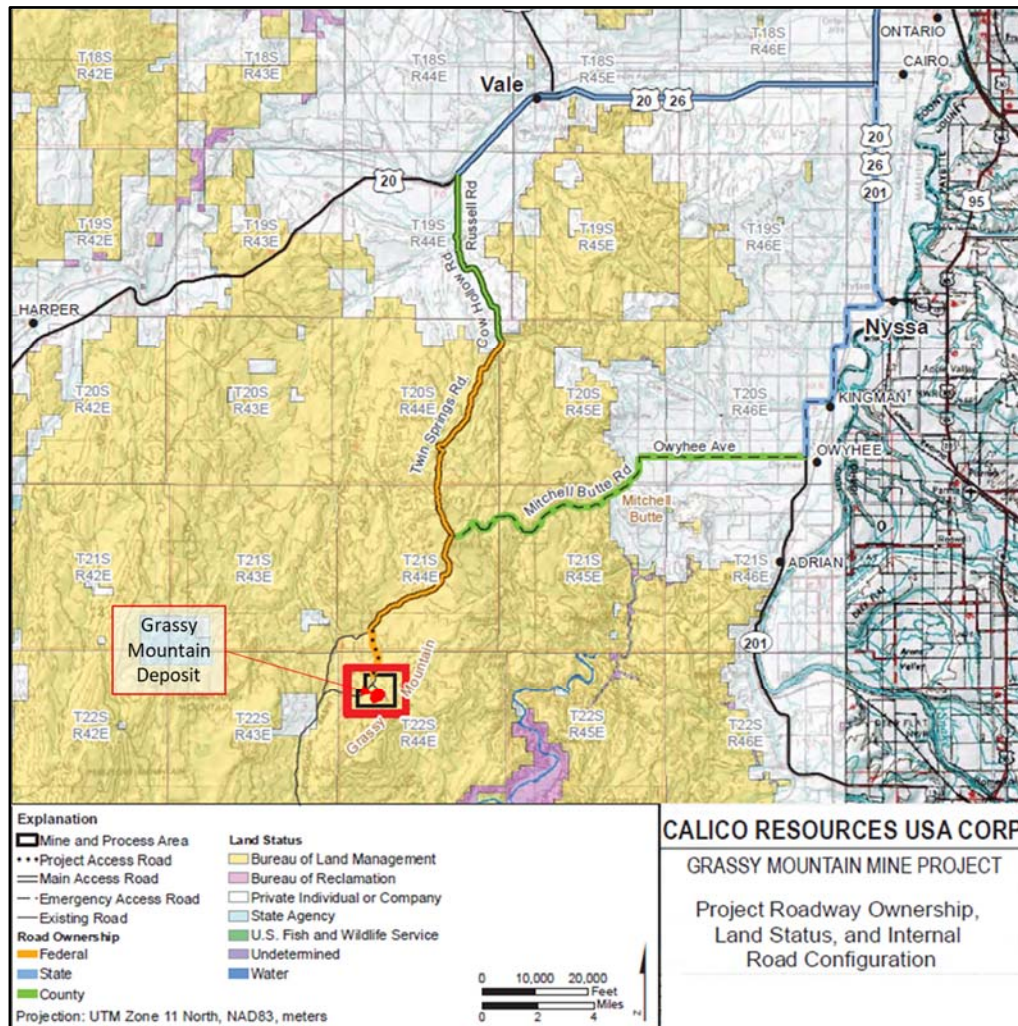


Note: Figure courtesy Paramount, 2020.

Access to the Frost Area claims group is along the Crowley Road from Harper Junction on US Highway 20. The Crowley Road is followed for 21.3 miles to a junction near Coyote Wells with the Dry Creek Cut-off Road, then, having turned east onto the Dry Creek Cut-off Road, following that road for 5.4 miles to the Frost Area claims group. Access within the claims is by dirt roads and trails.

Access to the Frost Area claims group is also possible from the Grassy Mountain claims group by following the Twin Springs Road to Twin Springs Campground, then turning west and following the Dry Creek Cut-off Road for approximately 10 miles to the Frost Area claims group. Figure 5-2 shows the access to the Frost Area claims group.

Figure 5-2: Access to the Frost Claims Group

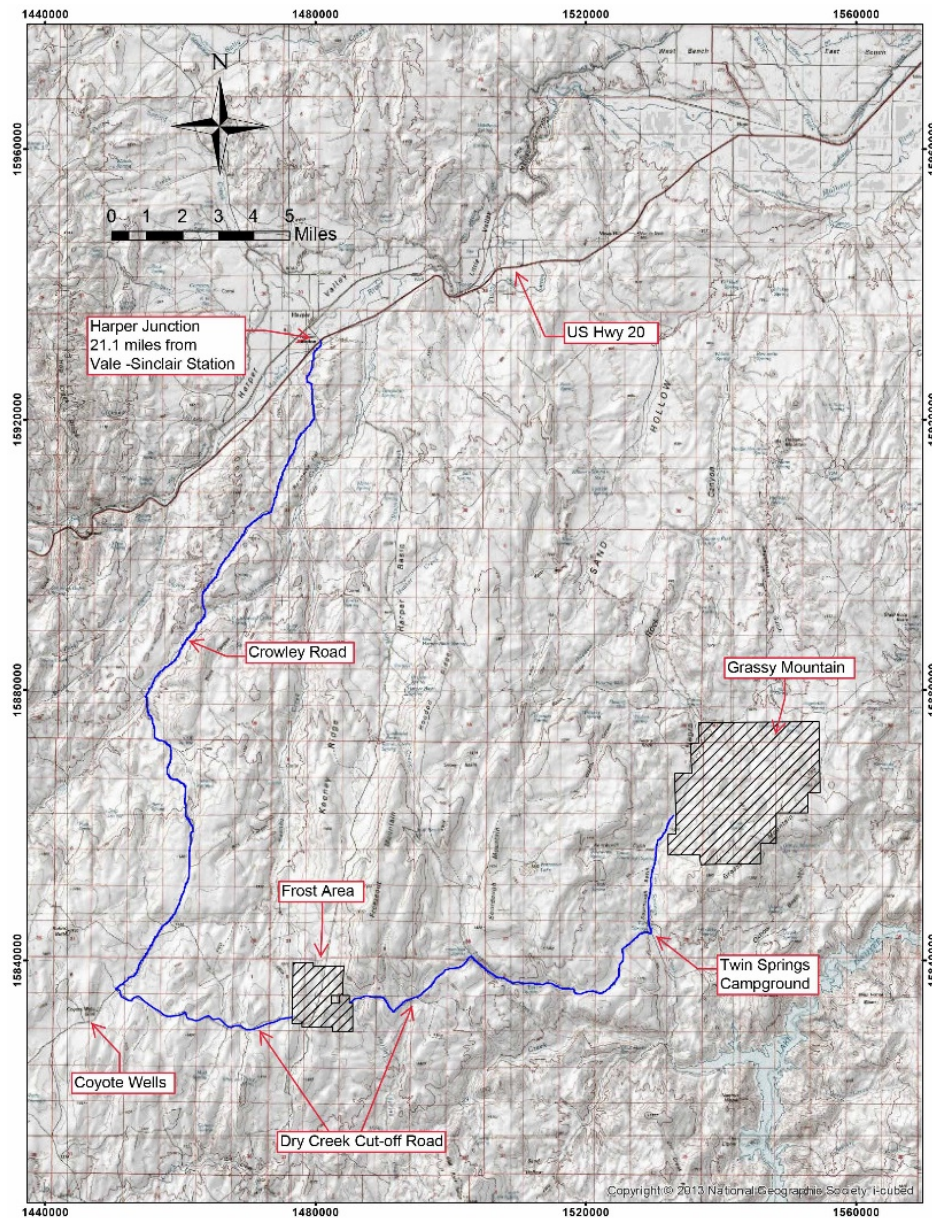


Note: Figure courtesy Paramount, 2020.

The closest major airport is at Boise, Idaho, a commercial airport served by major US airlines that is located 70 miles east of the Frost Area claims group.

5.2 Physiography

The Project area is in the semi-arid high-desert plateau region of eastern Oregon. The terrain is mainly open steppe with mesas, broad valleys, and gently-rolling hills to steeper uplands (Figure 5-3).

Figure 5-3: Photograph of Grassy Mountain Area Looking South

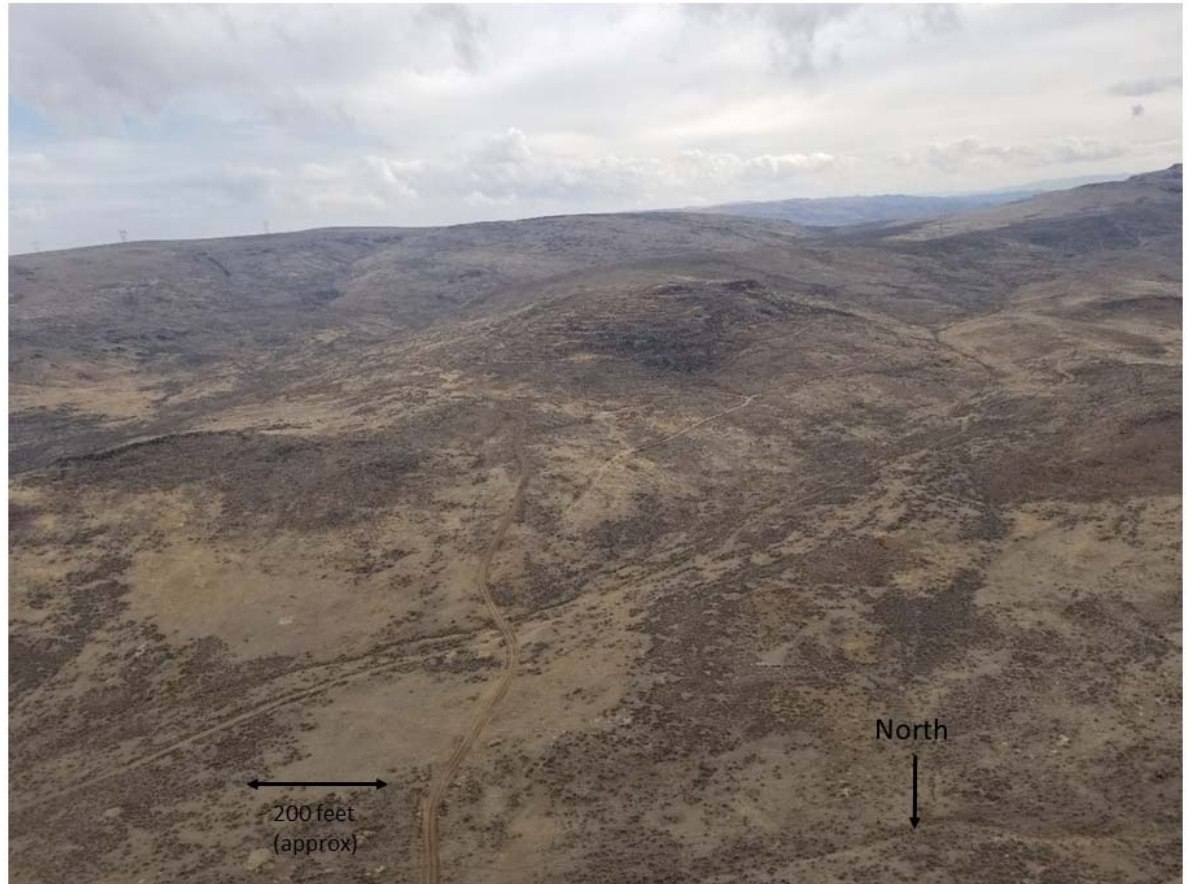

Note: Photograph modified by MDA. Photograph taken by Paramount, 2018.

Elevations range from 3,330 to 4,300 ft above mean sea level at the main Grassy Mountain area, while elevations at the Frost Area claims group range from 4,400 to 5,000 ft above mean sea level. Vegetation across the entire area consists of sagebrush, weeds, and desert grasses tolerant of semi-arid conditions.

5.3 Climate

The climate is of the semi-arid, continental-interior type, with average annual precipitation of about 9.25 inches, roughly half of which falls as snow between November and March. Local weather data indicate a mean annual temperature of 52° F, with daily temperatures ranging from an extreme low of -20°F in the winter to extreme highs of 100°F and higher in the summer.

It is expected that mining activities will be conducted year-round. Seasonal road maintenance is anticipated to be sufficient to provide initial access to the site for all personnel and any deliveries related to the mine site and construction. The road will be upgraded for year-round activities during mine construction.

5.4 Water Supply

Water to support current exploration activity is available from on-site wells. Long-term water needs for mining and processing will require additional wells to ensure availability. Existing capacity is as much as 200 gallons per minute (gpm) from multiple water wells situated near the proposed mill and mine sites.

A new Permit to Appropriate the Public Waters was issued in 2019 (T-18337); refer to Section 4.7. The water extraction rate is sufficient to support the requirements of the proposed mine and processing facility. Project water requirements and sources are described in more detail in Section 18.

5.5 Power

A regional, 500-kV electrical transmission line runs through the southern part of the Project area, about 2.5 miles south of the proposed mine site. However, the high voltage of this interstate transmission line makes it unsuitable as a source of power for the site. Studies and designs have been completed based on a power source from the Hope Substation owned by Idaho Power Company, located along US Highway 20 (Figure 5-4; see also discussion in Section 18).

5.6 Infrastructure


As of the effective date of this Report, groundwater monitoring wells and unpaved access and drilling roads are the only existing infrastructure within the Grassy Mountain Project area. The infrastructure required for the proposed operation is detailed in Section 18.

5.7 Community Services

The community nearest the project is Vale, Oregon, with a population of approximately 1,700. Vale is the seat of Malheur County and the home of all related government offices. The regional BLM office is also located in Vale.

Fuel, restaurants, lodging, groceries, hardware supplies, and equipment-repair shops are available in Vale. Other logistical support is available in Nyssa and Ontario, Oregon, both of which are located within 30 miles of the Project. Boise, Idaho, a major metropolitan city, is within a 90-minute drive of the Project area. Mining personnel, equipment suppliers, engineering expertise, and telecommunications services are all expected to be available within the area.

Figure 5-4: Proposed Power Source for the Planned Operation

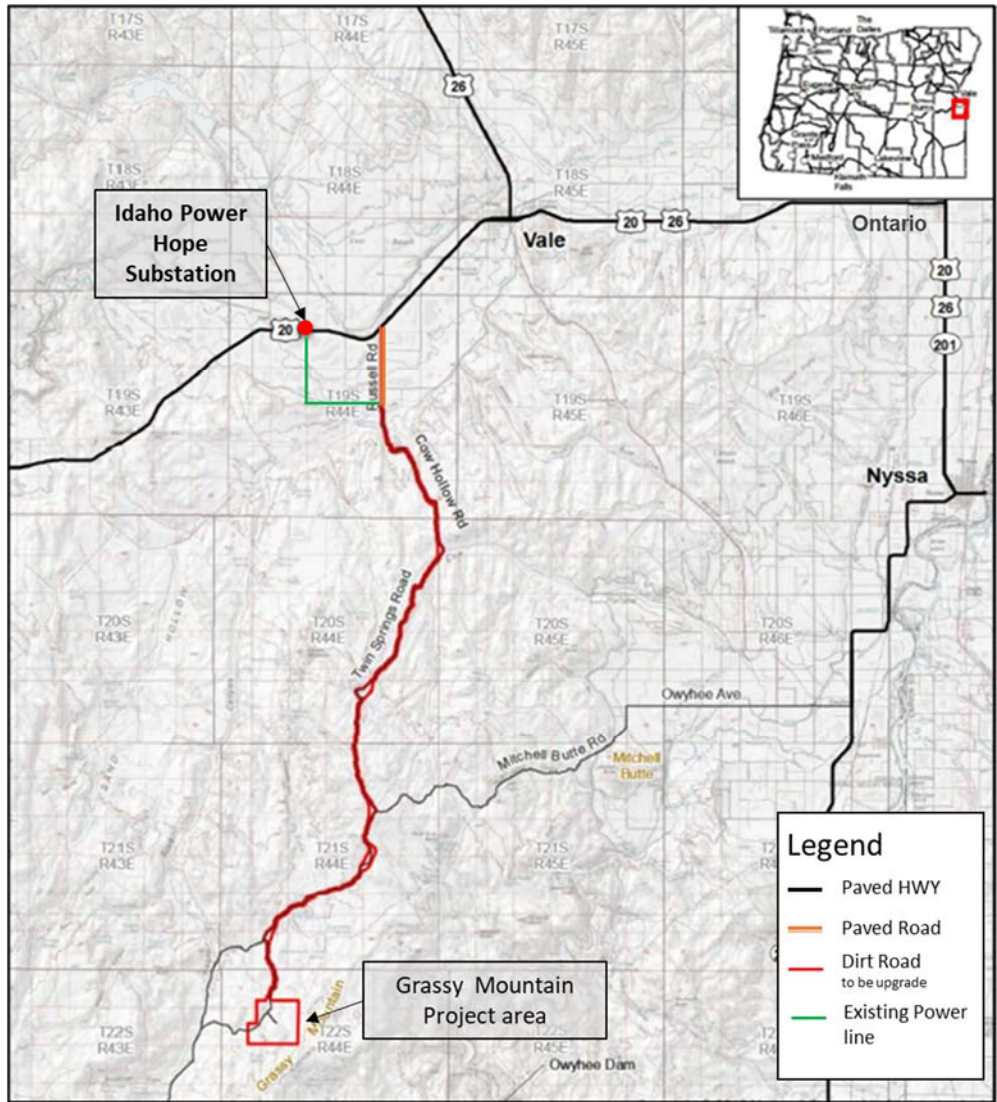

Note: Figure courtesy Paramount, 2018.

6 HISTORY

6.1 Introduction

The information summarized in this section of the report has been extracted and modified from Wilson et al. (2015a), which was drawn from Hulse et al. (2012), with additional information derived from multiple sources, as cited. A concise early history of the discovery of the Grassy Mountain deposit and other events through to September 1988 was reported by Kelly (1988). The QP reviewed this information and believes this summary accurately depicts the history of the Grassy Mountain Project.

Portions of the present Grassy Mountain Project were first staked by two independent geologists, Richard “Dick” Sherry and Eugene “Skip” Yates, in 1984. Atlas Precious Metals (Atlas) acquired the Sherry and Yates interests in the Grassy Mountain area in 1986. Between 1986 and 1991, Atlas conducted extensive exploration of the property that culminated in the discovery and delineation of the Grassy Mountain deposit, as well as a number of other peripheral exploration targets. Atlas collected extensive geological, mine engineering, civil engineering, metallurgical and environmental baseline data related to the Grassy Mountain deposit that were used to support a 1990 historical feasibility study for an envisioned open-pit heap-leach and milling operation. Atlas then began to consider underground-mining scenarios, but declining gold prices and the perception of an unfavorable permitting environment discouraged Atlas from developing the project, and the claims group was optioned to Newmont Exploration Ltd (Newmont) in 1992 and Tombstone Exploration Company Ltd (Tombstone) in 1998. In February 2000, Seabridge entered an option agreement with Atlas to acquire a 100% interest in the Grassy Mountain claims group and completed the acquisition in April 2003.

Seabridge did not carry out exploration at the Grassy Mountain Project. In April 2011, Seabridge signed an option agreement granting Calico the sole and exclusive right and option to earn a 100% interest in the claims group. The acquisition of the Grassy Mountain claims group by Calico was completed in 2012. In 2011 and 2012, Calico carried out geologic mapping and sampling, and drilled a total of 13,634 feet in 17 holes. Calico also commissioned a geophysical survey to assist in their exploration efforts.

Paramount acquired Calico in 2016.

6.2 1986–1996 Exploration History

Historical exploration conducted by previous operators includes exploration programs carried out by Atlas, Newmont, Tombstone, Western Mining Corp. (WMC), and Calico.

6.2.1 Atlas 1986–1992 (Grassy Mountain Claims Group)

Atlas carried out geologic mapping and recognized soil geochemistry as an important exploration tool at Grassy Mountain. Most Atlas exploration targets were initially identified by claim-corner soil sampling on 600-ft by 1,500-ft spacings. Atlas conducted additional soil and float sampling on several anomalies and identified a genetic link between gold mineralization and silicification. Of the 400 drill holes completed by Atlas, 196 were reverse circulation (RC) holes drilled on 75- to 100-ft centers within what became the Grassy Mountain deposit area. The remaining holes were drilled at other targets within the Grassy Mountain claims group.

Atlas drilled 87 RC holes at the Crabgrass deposit and defined three separate near-surface zones of gold and silver mineralization.

6.2.2 Western Mining Corp. 1989–1990 (Frost Claims Group)

Work completed by WMC in 1989 and 1990 discovered the presence of a gold-bearing epithermal vein in the Frost Area claims group (Suchomel, 1991). The vein does not crop out at surface, and its strike and dip extents have not been adequately defined by drilling.

WMC conducted geologic mapping and sampling throughout the Frost Area claims group, which was followed by 32 RC drill holes totaling 13,310 ft. Work completed by WMC at the Frost Area claims group is summarized in Table 6-1 (adapted from Suchomel, 1991).

Table 6-1: WMC Work Completed, Frost Area Claims Group

Item	Description
Claim staking	169 unpatented lode claims
Mapping	Geology of claim block
Assays/geochemistry	60 rock samples 600 soil samples 90 stream-sediment samples 130 vegetation samples 2,500 RC drill samples
Drilling	32 holes, 13,310 ft
Geophysics	VLF, Gravity, IP

Notes: VLF = Very Low Frequency Electromagnetics; IP = Induced Polarization

6.2.3 Golden Predator Mines 2009–2017 (Frost Area Claims Group)

Golden Predator Mines U.S. Inc. (Golden Predator) staked claims and held the Frost Area claims group from 2009 until 2017. It is not known what work was completed by Golden Predator.

6.2.4 Newmont 1992–1996 (Grassy Mountain Claims Group)

Newmont carried out extensive and locally detailed geologic mapping and conducted both soil and rock-chip sampling. In 1993, Newmont geologists mapped 40 square miles at a scale of 1:6,000 and collected approximately 2,600 soil samples on a 400-ft by 200-ft grid in hopes of identifying anomalies missed by prior Atlas sampling. During 1993 and 1994, Newmont collected more than 400 rock-chip samples and conducted several geophysical surveys, including a ground-based gravity survey along existing roads, airborne magnetic and radiometric surveys over the entire property, and ground-based gradient-array (IP/resistivity) surveys over the Grassy Mountain deposit and several of the satellite prospects. Ground magnetic surveys were conducted at specific areas. Newmont geologists re-logged the remaining Atlas drill core during this period, and eventually the Atlas RC drill chips as well.

In 1994, Newmont drilled 11 inclined core holes designed to intersect and define the geometry of potential high-grade gold zones within the Grassy Mountain deposit. These were followed with one core hole wedged off of the initial core hole, two holes pre-collared by RC and completed with core, and one additional core hole.

Newmont’s 15 holes were all angled and totaled 15,009.5 ft. This drilling defined what Newmont thought could be several gold zones in excess of 0.1 oz/ton Au within an area of the Grassy Mountain deposit measuring approximately 600-ft long by 350-ft wide by 250-ft thick. Mineralization was constrained to the northeast by a single drill hole that failed to encounter high-grade gold. Newmont considered the western extent of the main high-grade zone effectively closed off after encountering only low-grade gold (0.012 to 0.019 oz/ton Au) and local barren quartz–chalcedony veins. Based on


the core drilling and mapping and sampling of surface exposures, Newmont geologists concluded that high gold grades at the Grassy Mountain deposit were controlled by narrow, steeply south-dipping quartz-chalcedony veins and clay matrix breccias that would need to be properly represented by grade modeling and resource estimation.

During 1995 and 1996, Newmont’s activities focused on estimating Mineral Resources at the main Grassy Mountain deposit. No new exploration work was done during this period.

6.2.5 1996 Exploration at Outlying Targets within the Grassy Mountain Claims Group

By 1996, Atlas and Newmont had identified and named a number of mineralized and potentially mineralized target areas peripheral to the main Grassy Mountain gold deposit based primarily on rock-chip, float, and soil-sample data. These outlying targets, several of which were drilled to varying degrees, are shown in Figure 6-1.

Figure 6-1: Outlying Target Area Map

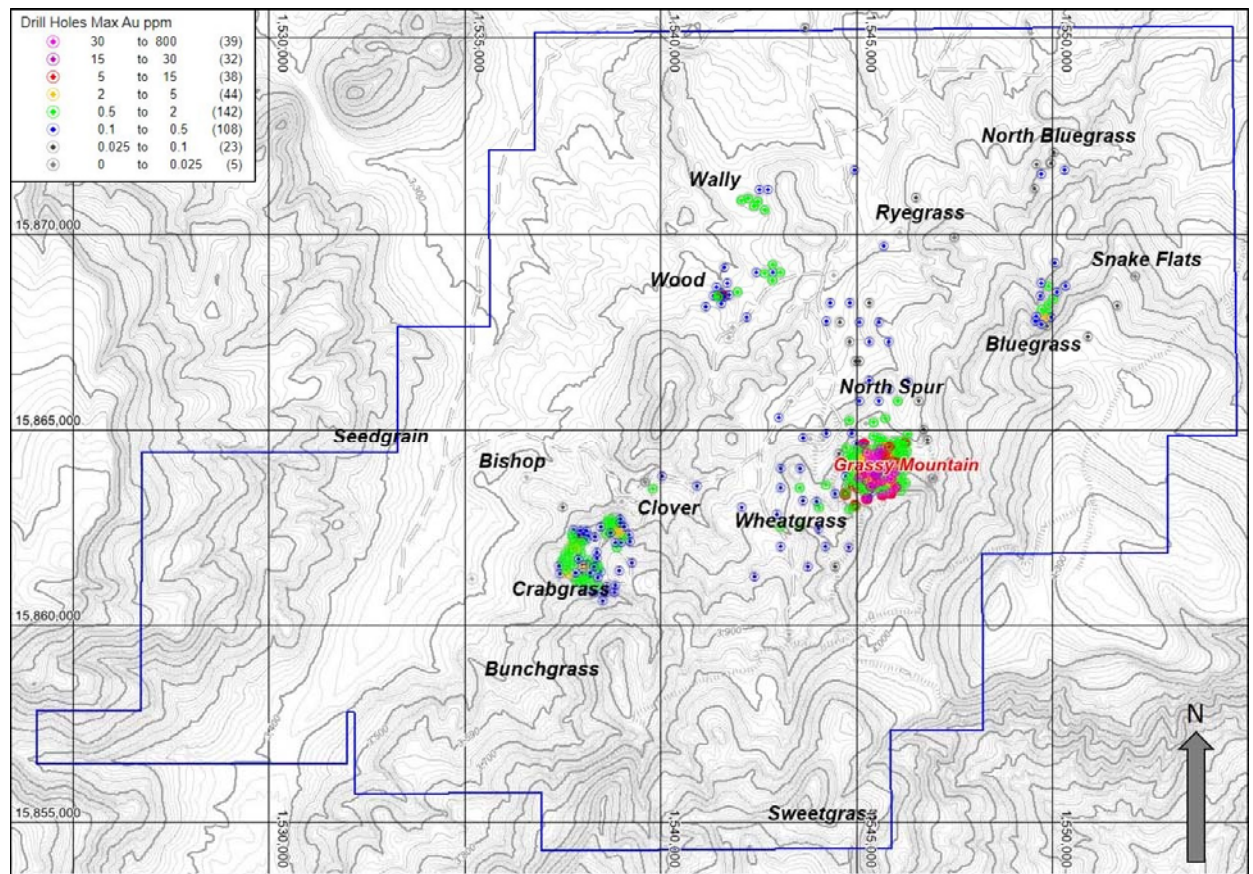

Notes: Figure courtesy Paramount, 2016. Blue lines are limits of Paramount’s claims; UTM NAD83 US Feet, Zone 11 projection; contour interval is 10 ft. 5,000 ft grid lines for scale. Dots are drill hole collars through 2012 colored by gold values.

6.2.6 Wheatgrass

This target area is approximately 1,500 ft southwest of the Grassy Mountain deposit area (Figure 6-1) and was the site of the first drilling on the claims. Wheatgrass may be a lateral continuation of mineralization extending from the main Grassy Mountain deposit that is displaced by down-to-the-west faults. A number of RC drill holes tested this area with some narrow, low-grade intersections being encountered. Most of the historical holes were drilled vertically and are widely spaced.

6.2.7 North Spur

North Spur is 2,000 ft to the north–northeast of the main Grassy Mountain deposit (Figure 6-1). Resistant ledges of silicified sandstone indicate hydrothermal fluids flowed through the North Spur area. Three widely spaced vertical RC holes south of the silicified ledges intercepted elevated gold grades. About 500 ft to the north, a fence of three vertical RC holes is located approximately at the northern margin of the most strongly silicified outcrops. These holes penetrated intervals with generally low gold grades, but they are sporadically mineralized. Review of RC chips and logs from these holes indicates that gold grades decrease down hole as the sandstone intervals transition to more clay-rich units with depth. All of these holes were drilled vertically and did not adequately test for steeply dipping mineralized structures.

6.2.8 Crabgrass

The three mineralized areas that comprise the Crabgrass prospect (Figure 6-1) appear to be stratiform and contained within the flat-lying to gently east-dipping sandstones above the clay-rich units, but all the historical holes are vertical and RC. Significant low-grade gold mineralization was encountered in numerous holes, which formed the basis for a historical resource estimate.

6.2.9 Bluegrass and North Bluegrass

These targets are located 1.2 miles and 1.6 miles northeast of the Grassy Mountain deposit, respectively (Figure 6-1). Sixteen RC holes were drilled in the area to follow up on rock-chip and float-chip samples with elevated gold contents.

6.2.10 Snake Flats

This area is 2.25 miles to the northeast of the Grassy Mountain deposit (Figure 6-1). The target was identified by mapping float of silicified arkose and sinter boulders. A large mercury, arsenic, and antimony soil anomaly extends down-slope for approximately 3,500 ft to the northeast. This is the most aerially extensive surface geochemical anomaly at the project other than at Wheatgrass. Some of the samples from the altered boulders yielded elevated gold values; the source area for these boulders appears to be somewhere beneath post-mineral basalt in the area. Three RC holes were drilled through about 100 ft of the post-mineral basalt before intersecting unaltered sandstone and siltstone. Additional work is necessary to define a drill target.

6.2.11 Wood

The Wood target is 1.2 miles northwest of the main Grassy Mountain deposit area (Figure 6-1). Wood was identified by surface rock and soil sampling, followed by surface trenching. Rock-chip samples that were taken from a small outcrop of weakly silicified volcanic rocks returned elevated gold values. Fifteen shallow RC drill holes were completed in the area, some of which returned encouraging results.

6.2.12 Wally

The Wally, or Big Wally, target is 1.5 miles north–northwest of the Grassy Mountain deposit (Figure 6-1). Soil samples in the Wally area defined overlapping arsenic, mercury, antimony, and gold anomalies that straddle a north-northwest-trending fault shown on the district geology map. Drilling returned some favorable results.

6.2.13 Ryegrass

The Ryegrass, or Dennis' Folly, target is located 1.2 miles north of the Grassy Mountain deposit (Figure 6-1). This area was identified by mapping silicified zones that returned low-level gold values and anomalous mercury in rock-chip samples.

6.2.14 Clover

This target is one mile west of the Grassy Mountain deposit (Figure 6-1) and is identified as an area of weakly silicified arkose adjacent to a northeast-trending fault. Rock-chip sampling identified an outcrop containing 25 ppb gold.

6.2.15 Bunchgrass

Bunchgrass is an area of modestly elevated mercury, arsenic, and antimony in soil samples located 0.5 miles south of Crabgrass (Figure 6-1). Wilson et al. (2015a) reported that the target area is approximately 750 ft wide.

6.2.16 Sweetgrass

Sweetgrass is located approximately 1.75 miles southwest of the Grassy Mountain deposit (Figure 6-1). Sampling of a large float boulder of siliceous sinter returned elevated gold values. Although additional sampling in the area did not return any significant values, more work is warranted to determine the source of this siliceous sinter boulder.

6.3 1998–2016 Exploration**6.3.1 Tombstone 1998**

Prior to finalizing their agreement with Atlas, Tombstone reviewed data from previous work and commissioned an economic study of alternative development scenarios. Tombstone drilled 10 RC holes, six of which were completed with core tails, for a total of 8,071 ft. Tombstone relied heavily on Newmont's gradient-array IP/resistivity geophysical surveys to define their drilling targets.

6.3.2 Seabridge 2000–2010


Seabridge acquired the Grassy Mountains claims group in 2000 and subsequently optioned the property to Calico in early 2011. Seabridge did not conduct any exploration.

6.3.3 Calico 2011–2016

Prior to the acquisition of Calico by Paramount, Calico geologists conducted geologic mapping and compiled the Atlas and Newmont geology and surface sample data using geographic information system (GIS) software. During 2011 and 2012, a total of 13,634 ft was drilled in 14 RC and three core holes. Thirteen of these holes were drilled at the Grassy mountain deposit area and four were drilled to test outlying targets.

In 2012, Calico commissioned a 25.1 line-mile controlled-source audio-frequency magnetotelluric (CSAMT) survey conducted by Zonge Geosciences Inc. (Zonge). The survey lines were oriented N20°W (Figure 6-2) and arranged to cross the trend of known mineralization.

Figure 6-2: Map of 2012 CSAMT Lines

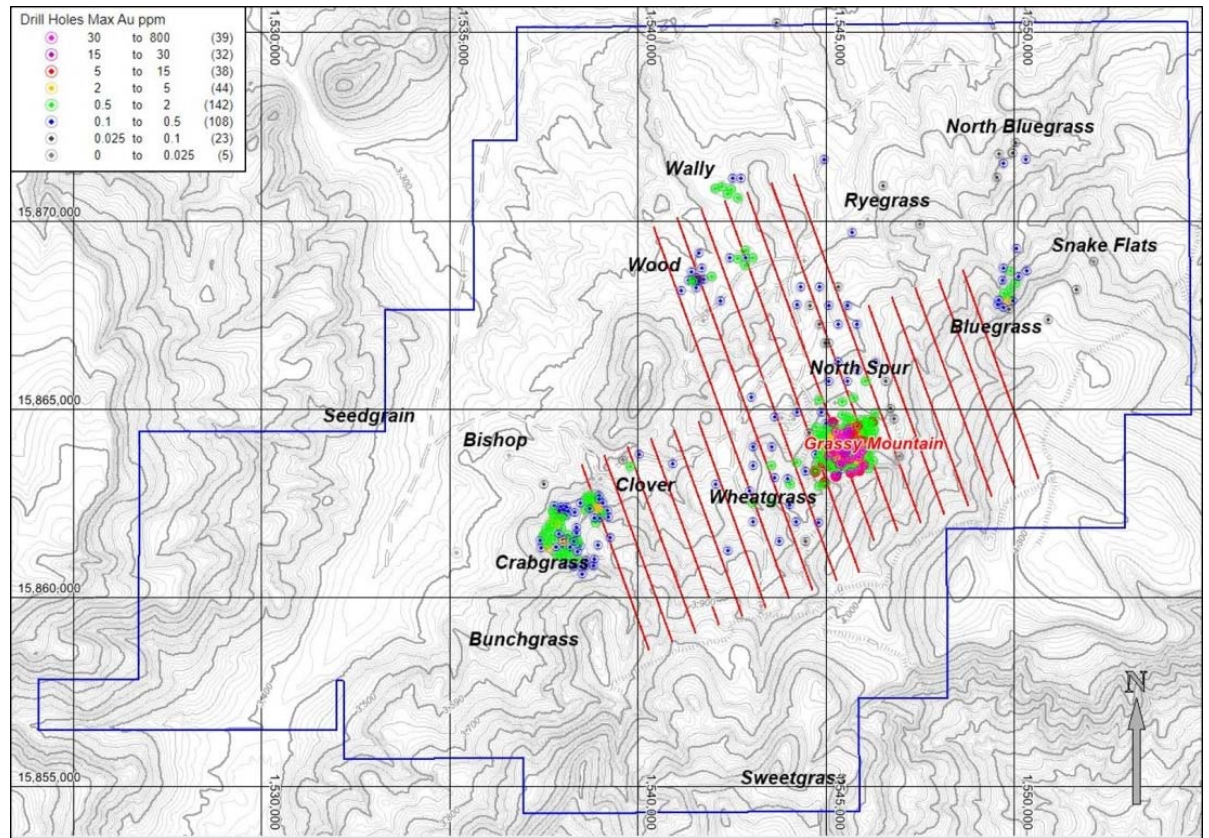


Note: Figure from Wright (2012). Red lines show CSAMT lines. Blue lines are limits of Paramount's claims; UTM NAD83 US Feet, Zone 11 projection; contour interval is 10 ft. 5,000 ft grid lines for scale. Dots are drill hole collars through 2012 by maximum gold assays.

The CSAMT survey was done under the supervision of consulting geophysicist J.L. Wright of Wright Geophysics, Spring Creek, Nevada. Mr. Wright documented the survey methods and parameters, analyzed the processed data provided by Zonge, and made geologic and exploration interpretations in a 2012 report to Calico that included 18 inverted resistivity sections and interpretive overlays in PDF format, as well as ArcGIS and MapInfo electronic data files (Wright, 2012).

The CSAMT survey identified a zone of high resistivity that encompassed the main Grassy Mountain gold deposit (Figure 6-3), which is attributed to the zone of extensively silicified rocks in the deposit area. The high-resistivity response was visible in sectional and plan views of the resistivity inversion; an example is shown in Figure 6-3.

Figure 6-3: CSAMT Inversion: Resistivity at 328 to 656 Feet Below Surface

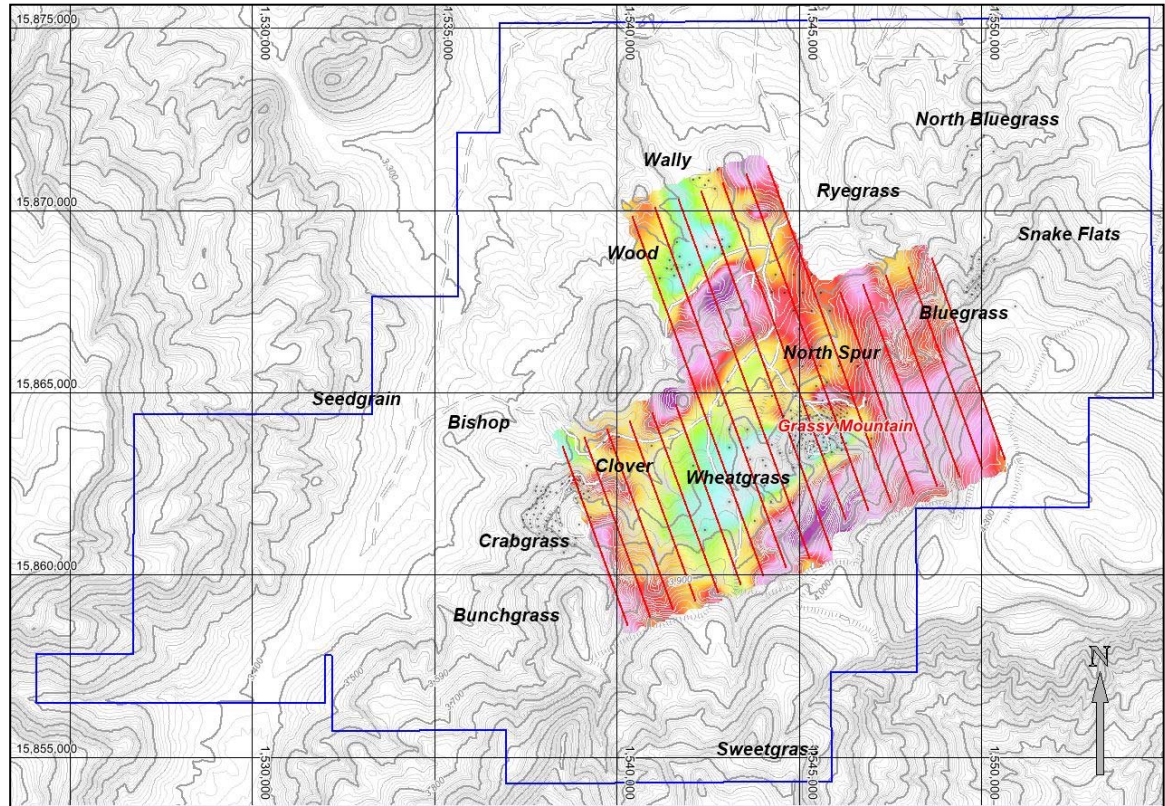

Note: Figure from Wright (2012). Blue lines are limits of Paramount's claims; UTM NAD83 US Feet, Zone 11 projection; contour interval is 10 ft. 5,000 ft grid lines for scale. Grey dots are drill hole collars through 2012.

In July 2016, Calico and the Grassy Mountain claims group were acquired by Paramount. Work carried out by Paramount through Calico as its operating entity is summarized in Sections 9 and 10.

6.4 Historical Mineral Resource Estimates

A variety of historical resource and reserve estimates for the Grassy Mountain gold deposit were completed on behalf of previous owners and issuers from 1990 through 1997. These historical estimates are described in detail in various internal reports prepared by Atlas, Newmont, and their contractors. All of the historical estimates were from before the introduction of NI43-101 standards for mining properties. The QP has not done sufficient work to classify these estimates. These historical estimates are superseded by the current Mineral Resource estimates described in Section 14.

6.5 Production

There has been no production at the Grassy Mountain Project.

7 GEOLOGICAL SETTING AND MINERALIZATION

7.1 Introduction

The information presented in this section of the Report is derived from multiple sources, as cited. The QP reviewed this information and believes this summary accurately represents the Grassy Mountain Project geology and mineralization as it is presently understood.

7.2 Regional Geologic Setting


The Grassy Mountain gold–silver deposit is the largest of 12 recognized epithermal hot-spring precious-metal deposits of the Lake Owyhee volcanic field. The Lake Owyhee volcanic field is located at the intersection of three tectonic provinces: the buried North American cratonic margin, the northern Basin and Range, and the Snake River Plain. During mid-Miocene time, large-volume peralkaline and subalkaline caldera volcanism occurred throughout the region in response to large silicic magma chambers emplaced in the shallow crust (Rytuba and McKee, 1984). The Lake Owyhee volcanic field includes several ash-flow sheets and rhyolite tuff cones that were erupted between 15.5 to 15 Ma (Rytuba and Vander Meulen, 1991). The district geology surrounding the Grassy Mountain gold deposit is shown in Figure 7-1.

At about 15 Ma, subsidence of the Lake Owyhee volcanic field triggered a change in volcanic eruption styles, resulting in small-volume basaltic and rhyolite deposits of limited extent. Volcanism during the middle to late Miocene was characterized by the eruption of small-volume metaluminous high-silica rhyolite domes and flows, as well as small-volume basalt flows and mafic vent complexes in north- and northwest-trending Basin and Range-type fracture zones and ring structures related to resurgent calderas. Regional subsidence involved the development of extensive grabens and facilitated the formation of through-going fluvial systems and large lacustrine basins. Large volumes of fluvial sediments, sourced in part from the exhumed Idaho Batholith to the east and southeast, were deposited contemporaneous with volcanism and hot spring activity during the waning stages of volcanic field development (Cummings, 1991). The resulting regional stratigraphic section is a thick sequence of mid-Miocene volcanic rocks and coeval to Pliocene-age lacustrine, volcanoclastic, and fluvial sedimentary rocks. The oldest units encountered are the flow-on-flow Blackjack and Owyhee Basalts (14.3 to 13.6 Ma). These basalts are overlain by arkosic sandstone, tuffaceous sandstone, and conglomerates of the Deer Butte Formation.

7.3 Local and Property Geology

Bedrock outcrops in the vicinity of the Grassy Mountain Project are typically composed of olivine basalt flows and siltstones, sandstones, and conglomerates of the Miocene Grassy Mountain Formation. These rocks are locally covered with relatively thin, unconsolidated alluvial and colluvial deposits. Erosion-resistant basalt flows cap local topographic highs, including Grassy Mountain proper, which is a prominent northeast-elongate ridge that forms a topographic crest about 1 mile southeast of the Grassy Mountain gold–silver deposit (Figure 7-1). Arkosic sandstones are encountered at the surface and at depth, but individual beds or sequences have not been correlated across the Project area, in part due to lateral sedimentary facies changes and structural offsets. Surface exposures and drill-defined stratigraphy at the Grassy Mountain deposit area reveal complex facies produced during the waning stages of volcanism of the Lake Owyhee volcanic field (Lechner, 2011) and development of the coeval Ore-Ida graben.

Figure 7-1: Grassy Mountain Regional Geology

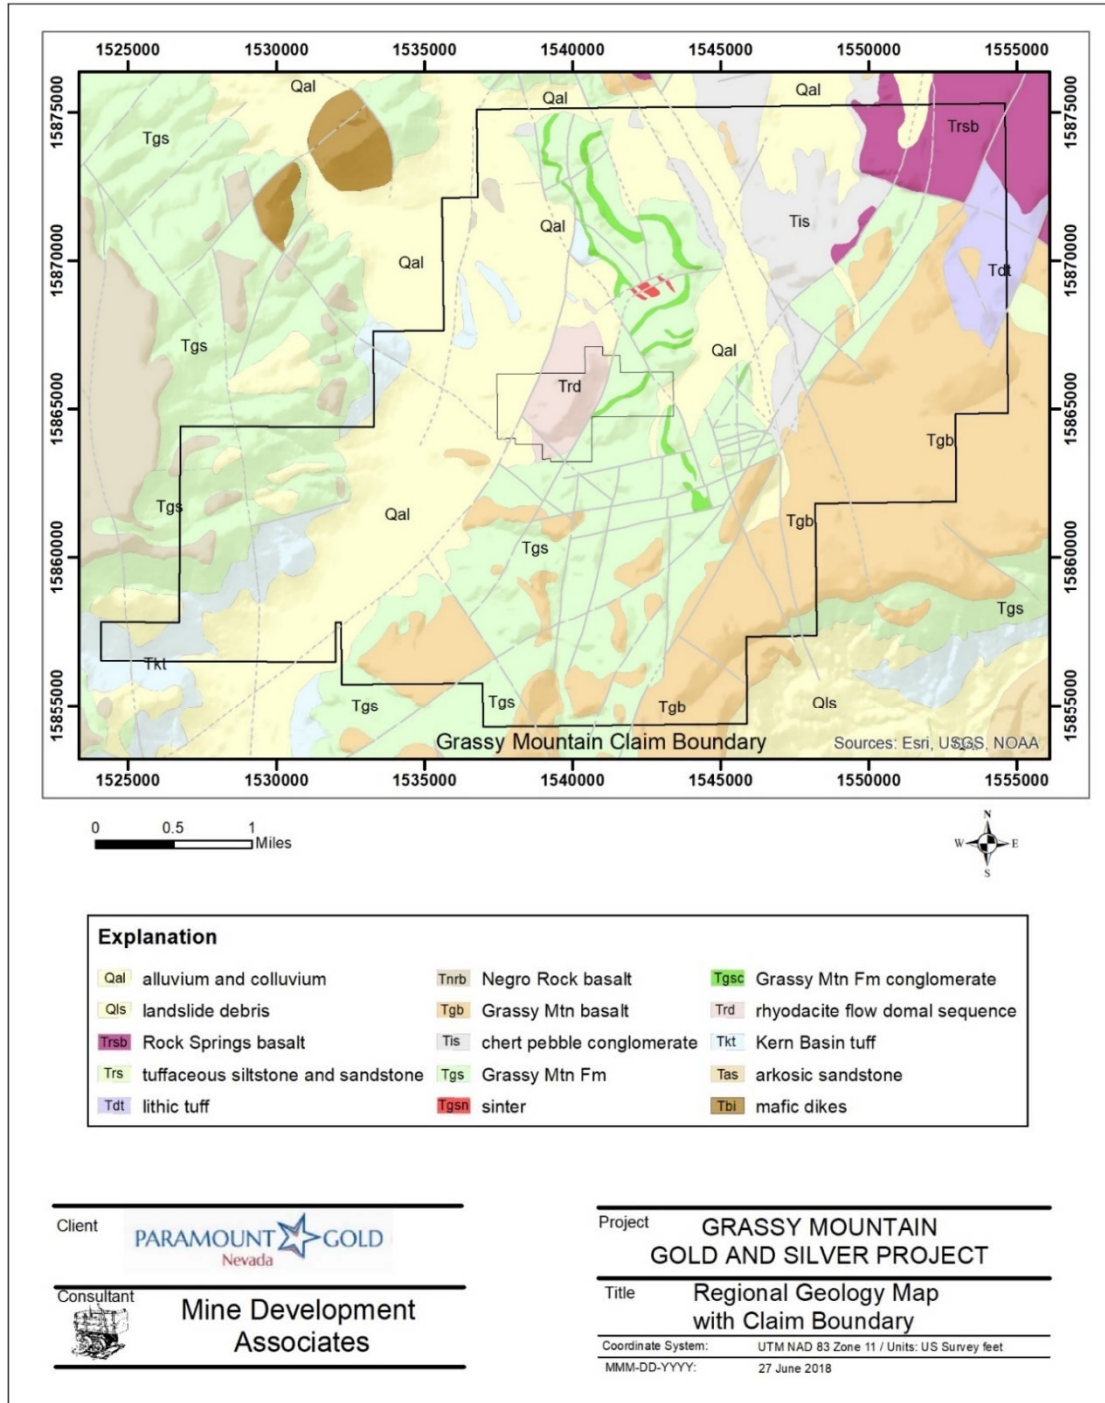


Note: Figure modified from Calico, 2017.

Figure 7-2 shows the local stratigraphic column in the vicinity of Grassy Mountain. The basal unit is the Kern Basin Tuff, a sequence of pumiceous crystal tuff, which in part displays cross beds and local surge structures, and non-welded to densely welded rhyolite ash-flow tuff. Clast size, thickness of individual ash units, and bedding structures suggest a source in the Grassy Mountain area (Cummings,

1991). The Kern Basin Tuff ranges in thickness from 300 ft on the south bluffs of Grassy Mountain to at least 1,500 ft in a drill hole beneath the Grassy Mountain gold-silver deposit.

Figure 7-2: Stratigraphic Column for the Grassy Mountain Area

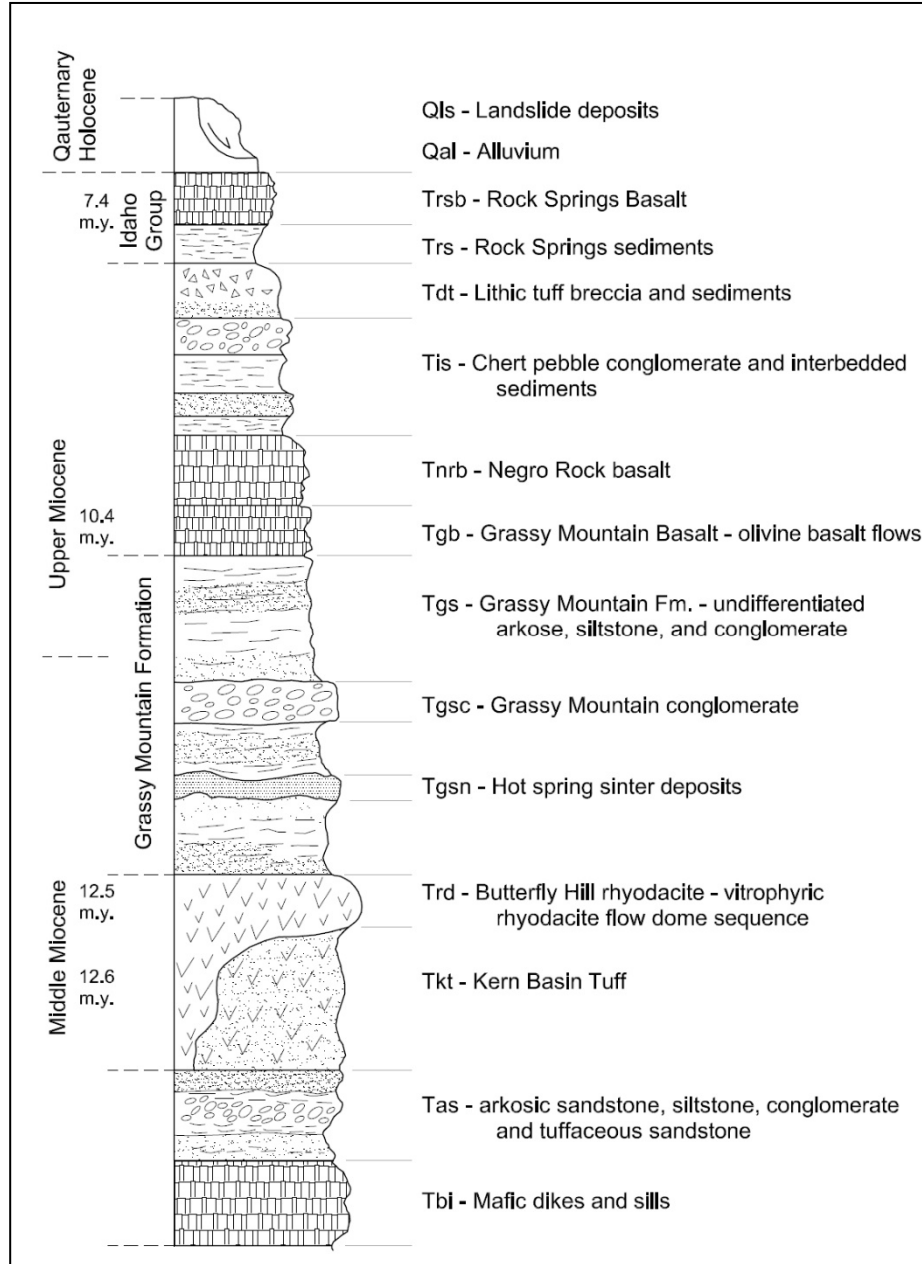

Note: Figure courtesy Paramount, 2020.

A small local flow-dome of approximately 12.5 Ma and known as the Butterfly Hill rhyodacite overlies the Kern Basin Tuff (Figure 7-2). However, in most of the Project area the Kern Basin Tuff is overlain by a series of fluvial, lacustrine, and tuffaceous sediments that are assigned to the Grassy Mountain Formation (Cummings, 1991). These sedimentary units include granitic-clast conglomerate, arkosic sandstone, fine-grained sandstone, siltstone, tuffaceous siltstone, and mudstone (Figure 7-2). The sedimentary units of the Grassy Mountain Formation, which host the Grassy Mountain deposit,

reportedly range from 300 ft to over 1,000 ft in thickness. Several siliceous “terraces” and silica sinter deposits are interbedded with silicified units of the Grassy Mountain Formation. Terrace construction was apparently episodic and intermittently inundated by fluvial and lacustrine sediments and ash, resulting in an interbedded sequence of siltstone, tuffaceous siltstone, sandstone, conglomerate, and sinter-terrace deposits. Load casts, flame textures, convolute laminations, and other soft-sediment deformation textures are common in both the sinter beds and other sedimentary units (Siems, 1990). The amount and size of the sinter clasts in the sedimentary rocks reflect relative proximity to a terrace. Proximal deposits are angular, inhomogeneous, clast-supported breccias of sandstone, siltstone, and sinter with indistinct clast boundaries in a sulfidic mud-textured matrix.

According to Lechner (2007), the sedimentary units of the Grassy Mountain Formation are unconformably overlain by 50 to 100 ft of black-chert pebble conglomerate interbedded with unconsolidated siltstone. This unit is recessive, and it is overlain by flows of olivine basalt assigned to the Grassy Mountain basalt, and, in the northwestern part of the Project area, by the basalt of Negro Rock (Figure 7-2). These mafic lavas are overlain by lacustrine and fluvial siltstone, sandstone, and conglomerate, which are successively overlain by the Rock Springs lacustrine deposits and basalt lavas that together make up the late-Miocene Idaho Group.

7.4 Grassy Mountain Deposit


7.4.1 Geology

The Grassy Mountain deposit area geology is shown in Figure 7-3. The deposit is centered beneath a prominent, 150-ft-high, silicified and iron-stained hilltop that consists of hydrothermally altered arkose and interbedded conglomerate of the Grassy Mountain Formation. Bedding is horizontal at the hilltop and dips at 10 to 25° to the north–northeast on the northern and eastern flanks. The bedding steepens to 30 to 40° on the west side of the hill due to drag folding in the footwall of the N20°W-striking Antelope fault. The southwest slope is covered by landslide debris of silicified arkose.

Several horizons of laminated silica, from a few inches to several ft in thickness, crop out southwest and north of the deposit area and are interbedded within the arkose, siltstone, and conglomerate of the Grassy Mountain Formation. These have been interpreted as beds of silica sinter (Figure 7-2), due in part to the presence of fossil reeds, petrified wood, and other fossil plant debris. Drilling within the Grassy Mountain deposit penetrated through more numerous and much thicker sinter horizons, indicating the sinter was deposited from hydrothermal fluids venting at the paleo-surface within the accumulating fluvial sedimentary sequence.

Drilling has also shown that in the subsurface of the deposit area the arkosic sandstones and conglomerates are interbedded with numerous intervals of siltstone and mudstone, much of which is thinly laminated. Beds with clay-altered ash to lapilli-sized tephra are common, and there are abundant layers rich in organic carbon ± carbonized plant debris. The laminated siltstone and mudstone intervals reflect a predominantly lacustrine setting that was the site of frequent episodic influxes of fluvial sand- to cobble-sized material.

Figure 7-3: Grassy Mountain Deposit Area Geologic Map

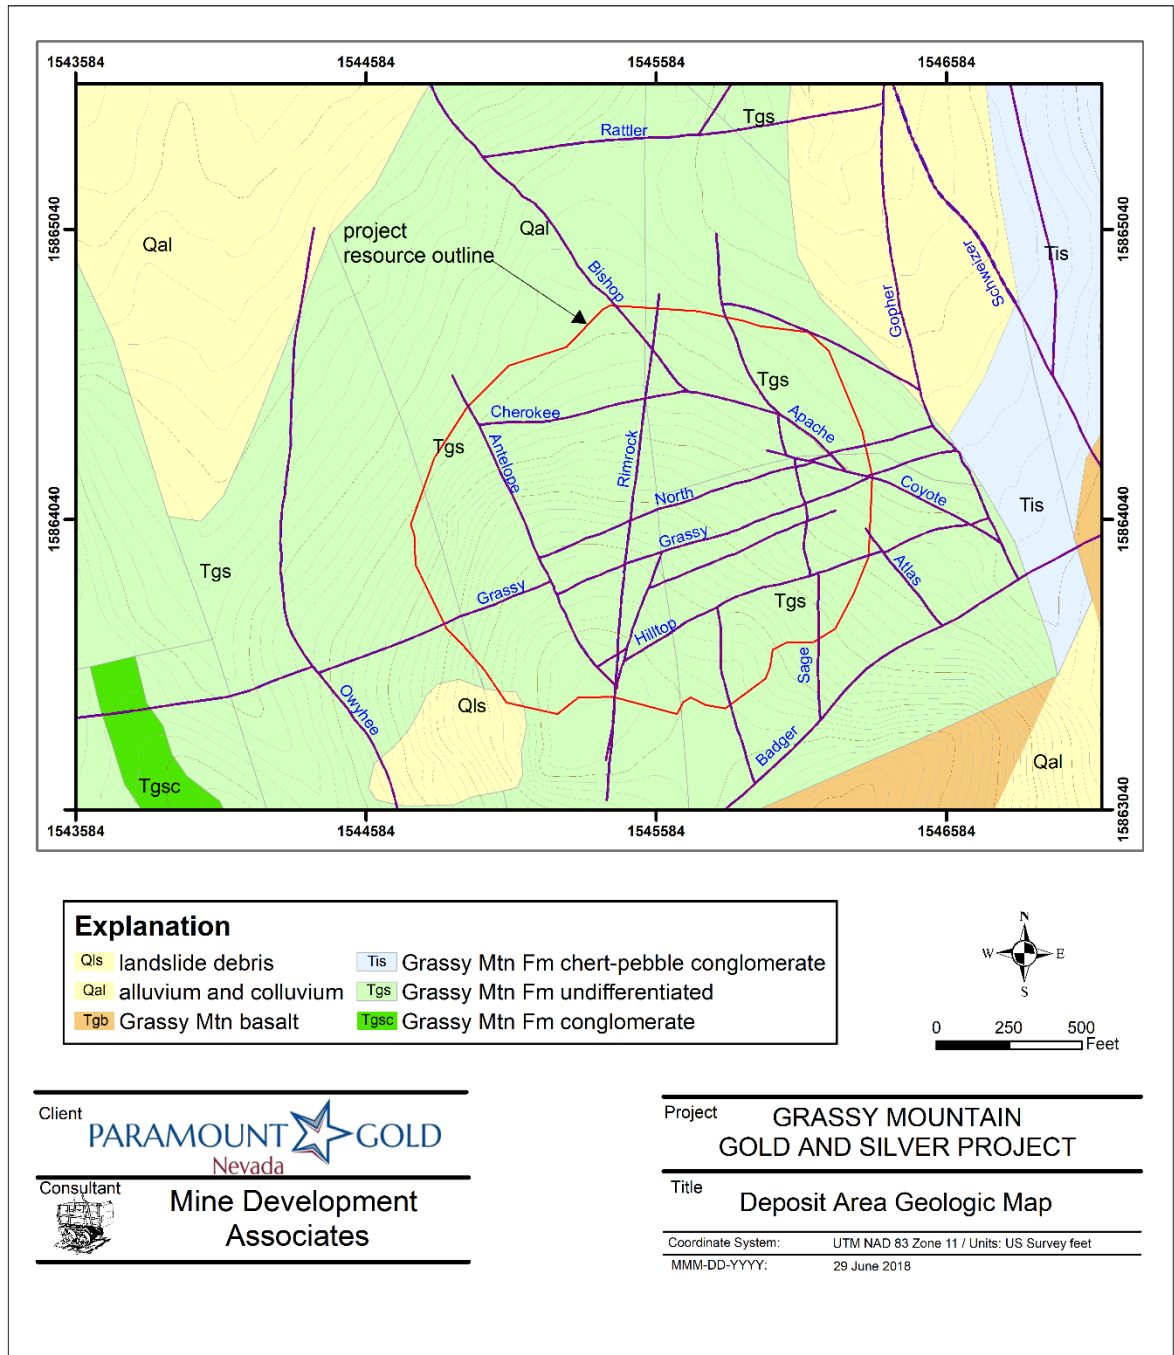

Note: Figure modified by MDA from Calico, 2017. Faults are shown as blue lines.

7.4.2 Structure

The gold–silver deposit is situated within a zone of complex extensional block faulting and rotation. Faults at Grassy Mountain are dominated by N30°W to N10°E striking normal faults developed during

Basin and Range extension and are inferred to have post-mineral displacement. On the east side of the deposit, these faults are inferred to have down-to-the east movement based on interpreted offsets of a prominent white sinter bed in drill holes, as well as drilled intersections of fault gouge. A set of orthogonal, N70°E-striking high-angle faults of minor displacement are inferred to link the graben faults. One of these, the Grassy fault, has vertical offset of only 10 to 40 ft or less, although it coincides with the axis of the high-grade core of the deposit.

7.4.3 Alteration and Mineralization

Hydrothermal activity and gold mineralization occurred during the accumulation of the Grassy Mountain Formation, and they were coeval with active sedimentation. The water-saturated, unconsolidated sediments therefore required silicic ± potassic alteration to develop sufficient competency to allow for the creation of fractures and structurally induced open space.

Silicification is the principal hydrothermal alteration type associated with gold–silver mineralization at the Grassy Mountain deposit. It takes the form of silica sinter, pervasive silica flooding, and as cross-cutting chalcedonic veins, veinlets, and stockworks. Silicification is inferred to be largely controlled by hot-spring vents active during accumulation of the Grassy Mountain Formation. The 300-ft deep main sinter is underlain by a zone of strong silicification with silica flooding and chalcedonic quartz veins.

Small amounts of fine-grained pyrite are present in silicified rocks that have not undergone later oxidation. In some parts of the deposit, particularly within arkose and sandy conglomerate units, silicification is accompanied by potassic alteration in the form of adularia flooding. Orthoclase, present primarily in sand-size grains and in granitic clasts, is unaffected by potassic alteration, and plagioclase is replaced by adularia. Adularia is extremely fine-grained and is identified microscopically or by cobaltinitrite staining. Silicic and potassic alteration zones are surrounded by barren, unaltered, clay-rich (20–40% montmorillonite), tuffaceous siltstone and arkose with minor diagenetic pyrite.

The Grassy Mountain gold–silver deposit is located largely within the silicic and potassic alteration zones, beginning approximately 200 ft below the surface. The deposit has extents of 1,900 ft along a N60°E to N70°E axis, as much as 2,700 ft in a northwest-southeast direction, and as much as 1,240 ft vertically. The surface expression of the mineralization is indicated by weak to moderately strong silicification and iron-staining, accompanied by scattered, 1/8- to 1.0-inch wide creamy to light-gray chalcedonic veins that filled joints.

The deposit consists of a central higher-grade core with gold grades of >~0.03 oz/ton Au that is surrounded by a broad envelope of lower-grade mineralization. The central higher-grade core is almost 1,000 ft long on the N60°E to N70°E axis, by 450 ft in width and 450 ft in vertical extent, all of which is above the Kern Basin Tuff and below a distinctive sinter unit. Representative cross sections through the deposit are provided in Section 14.7 (see Figure 14-1 to Figure 14-4).

7.4.3.1 Central Higher-Grade Core Zone

Three distinct and overlapping types of gold–silver mineralization are recognized within the central core of the deposit. These are gold-bearing chalcedonic quartz ± adularia veins, disseminated mineralization in silicified siltstone and arkose, and gold and silver in bodies of clay matrix breccia.

Zones of high-grade mineralization are defined by the presence of chalcedonic quartz ± adularia veins. Mineralized quartz ± adularia vein types include single, banded, colloform, brecciated and calcite-pseudomorphed veins. Colloform veins tend to carry the highest grades (>0.5 oz/ton Au), with visible gold to as much as 0.02 inches associated with argentite. Veins with relict bladed calcite texture also contain higher gold grades than the banded and single vein types. Gold mostly occurs as electrum along the vein margins or within microscopic voids. Some veins carry very little grade or are barren. At least some of the higher-grade zones of veins are thought to strike approximately N70°E.

Vein widths range from 1/16 to ~2.0 inches. Individually, such narrow veins are unlikely to have lateral or vertical extents of significance, but vein frequency can average one vein per foot in places. Vein swarms have strike lengths of 400 to 700 ft and vertical extents of 100 to 250 ft at elevations of 3,150 to 3,400 ft. Individual veins are too narrow to trace or correlate from hole to hole.

A steep southerly dip (70–85°) of the veins is inferred from vein intersection angles with drill core axes and bedding. Veins are mostly perpendicular to bedding, which generally dips 10–25° NNE within the deposit. Vein intersection angles of 10–25° to the core axis were mostly recorded in core holes GMC-001 to GMC-008 angled at -50° at S20°E, compared with 25° to 50° intersection angles in holes GMC-009 to GMC-011 angled -50° at N20°W. The N70°E strike of the veins is supported by: 1) surface mapping, 2) vein orientation perpendicular to bedding, 3) grade-thickness contouring, and 4) the overall trend in mineralization with grades in excess of ~0.03 oz/ton Au.

The veins crosscut the silicified sediments and have extremely sharp grade boundaries with the sediments. Vein frequency diminishes abruptly below an elevation of ~3,000 ft at the west–southwest limit of the higher-grade core to ~3,100 ft at the east-northeastern limit, and very few high-grade veins were encountered above the higher-grade core of the deposit.

Within the higher-grade core, high gold grades are also present in silicified siltstone and arkose with no visible veins. In these cases, gold and silver are inferred to be very finely disseminated in a stratiform manner in the silicified rock. Fine-grained pyrite is commonly disseminated in the silicified siltstone and sandstone where oxidation has not occurred. Contacts between siltstone and arkose beds seem to be more favorable and carry higher gold grades. In places, beds of tuff and tuffaceous siltstone appear to be particularly favorable host for higher-grade mineralization that lacks associated veins.

The third style of gold–silver mineralization was referred to by Newmont and later operators as “clay matrix breccia”, bodies of which may be more prevalent in the lower portion of the higher-grade core of the deposit. These bodies are interpreted to extend at near-vertical angles up and down into the surrounding, low-grade gold-silver envelope. Clay matrix breccias are mainly of clast-supported types and contain sub-rounded to sub-angular, sand- to boulder-sized clasts of silicified and/or veined arkose and siltstone with minor amounts of clay and iron-oxide minerals between the clasts. In drill core, clay matrix breccia intervals are intersected over lengths of as much as several tens of feet, but their true thickness and exact orientations are poorly understood, in part because their margins are commonly irregular-to-gradational and not planar, except where structural fabrics related to fault movement are evident. In some cases, it is difficult to discern where clay matrix breccias end and similar fault-related breccias begin; it is possible the two are in some cases genetically related.

Clay matrix breccias cut, and are therefore paragenetically later than, the silicification and veins. One interpretation is the clay matrix breccias formed by explosive releases of over-pressured water vapor, through faults and fractures during boiling in the waning stages of the hydrothermal activity.

7.4.3.2 Lower-Grade Envelope

Lower-grade mineralization envelopes the higher-grade core and, farther from the core, extends outwards as stratiform, mineralized lenses parallel to bedding (refer to Figure 14.1 and Figure 14.2 in Section 14). There are very few visible chalcedonic veins; the gold and silver are inferred to be disseminated within the silicified arkose and siltstone units. Contacts between arkose, siltstone, and sinter appear to have been preferentially mineralized, and beds of tuff and tuffaceous siltstone also were favorable sites for mineralization. Low-grade mineralization is also present in numerous intervals of silica sinter, but not all sinter intervals are mineralized. Sinter-hosted mineralization may be disseminated, or within fractures where the sinter has been structurally disrupted.

7.5 Frost Area Claims Group

The Frost Area claims group is underlain by Mesozoic volcanic, volcanoclastic, and interbedded sedimentary rocks, with Quaternary alluvial deposits filling the valleys. The observed volcanic stratigraphy records a complex history of middle Miocene to early Pliocene bimodal eruption and concurrent faulting. The Frost Area claims group stratigraphy lacks significant sequences of intermixed fluvial and lacustrine sedimentation that occur in the Grassy Mountain deposit area. This could indicate that the north-trending rift basins of the Lake Owyhee Volcanic Field did not form in the immediate vicinity of the Frost Area claims group, and, as a result, the Frost Area claims group area and nearby Freezeout Mountain were most likely topographic highlands and did not receive the sedimentation found nearby to both the east and west.

Banded to vuggy chalcedony–quartz–adularia vein material with smectite, hematite, and native gold and likely electrum fills a steeply dipping, northwest-trending fracture zone developed within Middle to Late Miocene age rhyolites and basalts. The vein zone penetrates previously silicified and hydrothermally brecciated rock containing low-level gold grades. Geologic mapping reveals the presence of a fossil hot spring system, similar to the Grassy Mountain deposit that underwent multiple episodes of rupturing and sealing.


The structural setting includes fault orientations grouped into two major sets:

- N0°–N10°W strike with varying dips;
- N45°W strike with varying dips.

The mineralized vein occurs in association with a N45°W-trending fault. Faults of this orientation appear to be the main conduits for fluids that produced hydrothermal alteration and mineralization in the Frost Area claims group.

The Frost Area claims group area geology is shown on Figure 7-4.

Figure 7-4: Frost Claims Group Geologic Map

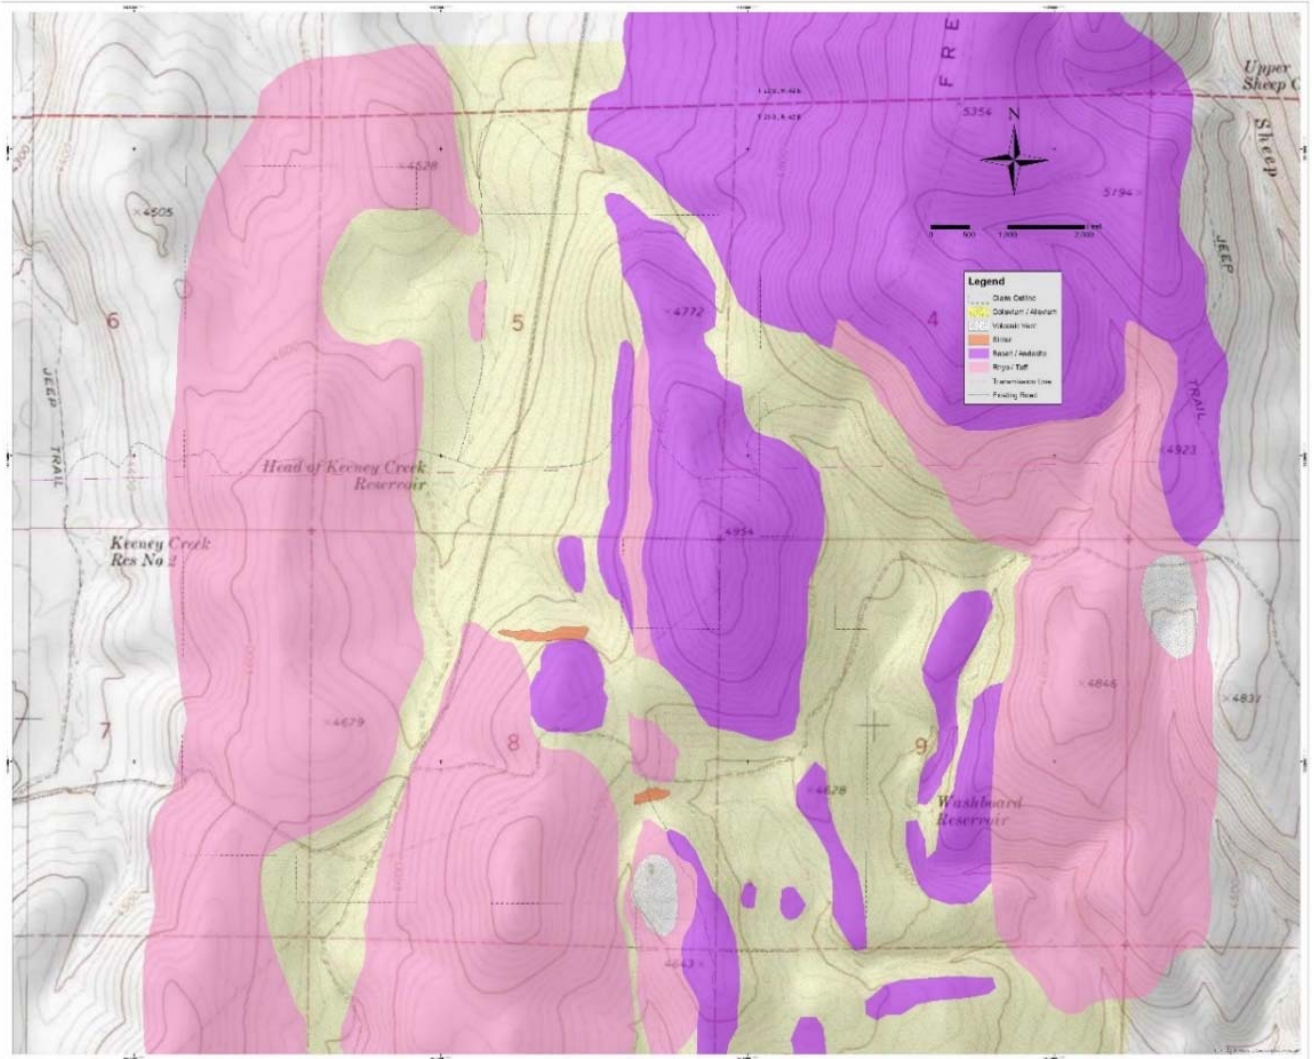


Note: Figure courtesy Paramount, 2020.

8 DEPOSIT TYPES

The geological setting, hydrothermal alteration, styles of gold-silver mineralization, and close spatial and timing association with silica sinter deposition, indicate that Grassy Mountain is an example of the hot-springs subtype of low-sulfidation, epithermal precious-metals deposits. The Grassy Mountain deposit is characterized by stacked sinter terraces that demonstrate hydrothermal fluids vented at the paleosurface concurrent with lacustrine and intermittent fluvial sedimentation. At a depth of 300 ft, the main sinter at Grassy Mountain is underlain by a zone of intense silicification, within which is located the core of the deposit that is the focus of this Report.

A conceptual, schematic section (Figure 8-1) shows a low-sulfidation epithermal system and its variable form with increasing depth, and the typical alteration zonation, including the distribution of sinter, a blanket of steam-heated advanced argillic alteration, and water-table silicification (Buchanan, 1981; Sillitoe, 1993).

Figure 8-1: Conceptual Hot-Springs Epithermal Deposit Model

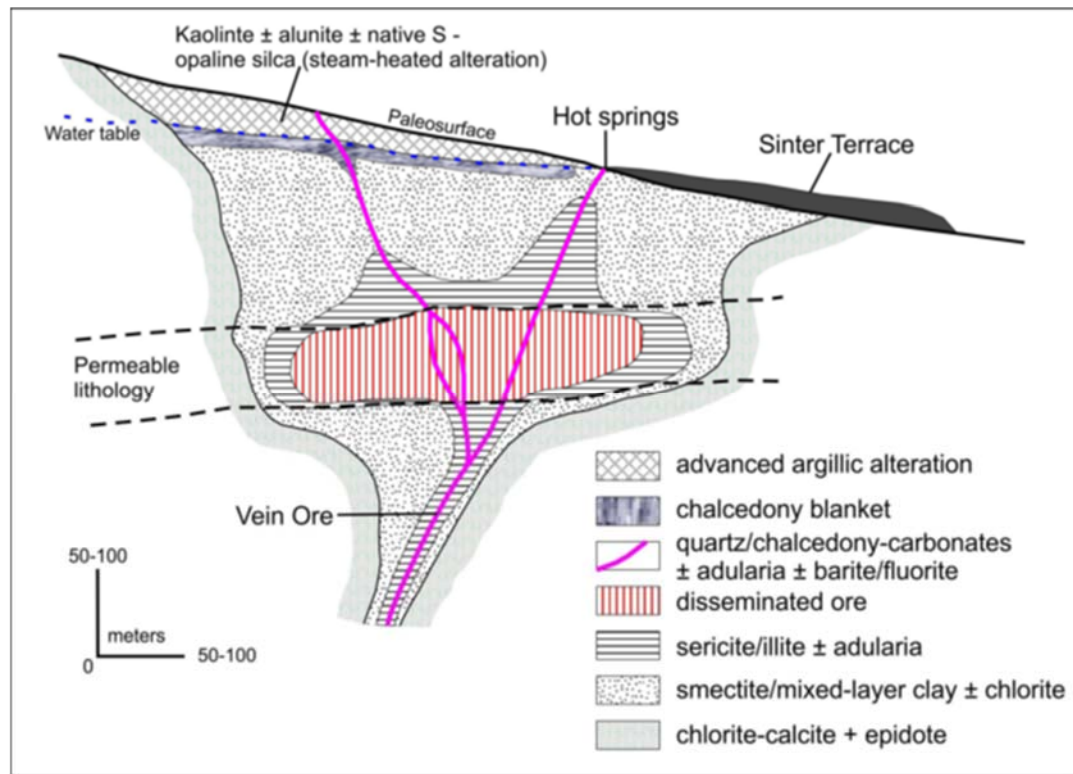

Note: Figure modified from Buchanan, (1981)

In the case of Grassy Mountain, the broader lower-grade mineralization extends up to and overlaps multiple, stacked deposits of sinter, reflecting near-surface epithermal mineralization as the sedimentary sequence accumulated.

The Frost area also hosts epithermal mineralization of the low-sulfidation hot-spring type.

9 EXPLORATION

In early 2017, Paramount commissioned an exploration review of the Grassy Mountain Project data to evaluate and define exploration drilling opportunities for potential expansion the known mineralization. This study was focused on the area within the Grassy Mountain claims group controlled by Paramount and was carried out and reported by Mr. Steven Weiss, Senior Associate Geologist for MDA (Weiss, 2017).

Mr. Weiss first compiled and evaluated geological and geophysical maps, soil and rock-chip assay data, and aerial images from files supplied by Paramount. During March 2017, Mr. Weiss reviewed RC drill cuttings and core, drill logs, paper maps, cross sections, and other files at Paramount's office in Vale. As part of this review, field traverses were made throughout the Grassy Mountain claim-group area to better understand the geology, rock geophysical response, and effects of hydrothermal alteration within the claims group.

Based on the field traverses, Mr. Weiss noted the high-potassium zones shown by the Newmont airborne radiometric data are likely controlled by abundant potassium-bearing clasts within exposed stratigraphic units of the Grassy Formation, and therefore concluded they are not the result of extensive potassic alteration. District patterns of low total magnetic intensity visible in the Newmont airborne magnetic maps also appear closely related to stratigraphy, as well as regional faults of the Oregon-Idaho graben, rather than major zones of hydrothermal alteration.

Zones of high resistivity defined by the 2012 CSAMT survey (refer to Section 6) correlate in part with the thick volume of silicified rocks that host the Grassy Mountain gold deposit. Drill data and RC chips show the resistivity high that extends southwest from the deposit toward the Crabgrass deposit, and the outlying resistivity high at the Wood area, are not the result of extensive silicification (Weiss, 2017). In these areas, the CSAMT high resistivity response may be from the underlying Kern Basin Tuff (Tkt) and rhyodacite of Butterfly Hill (Trd) units.


Four drill targets were identified within the immediate area of the Grassy Mountain deposit and were recommended for limited expansion drilling (Weiss, 2017). Drilling recommended to test these targets is summarized in Section 26.1. The near-mine targets have significant uncertainties in their locations due to a lack of confidence in the precise locations, dips, amount of displacement, and timing of the Apache-Coyote and Gopher faults, and the northeast-trending fault in the North Spur, all of which are viewed as potentially mineralized structures. Nevertheless, these targets were considered to be justified by the combination of their proximity to the proposed underground mine and the opportunity to expand the known mineralization, even if only incrementally (Weiss, 2017). Two holes were drilled as a preliminary test of the North Spur target in 2018 and these returned anomalous values.

Two separate targets in the outlying Wood prospect were also recognized to have the potential for structurally controlled vein or stockwork mineralization (Weiss, 2017). Drilling recommended for these targets is also summarized in Section 26.1.

Additional surface work was also recommended by Weiss (2017) with the goal of defining further exploration drill targets. This included expansion of the 2012 CSAMT coverage to better understand the subsurface at the Crabgrass, Bluegrass, North Bluegrass, Ryegrass and Dennis' Folly areas. The large geochemical anomaly north of Snake Flats was recommended for verification and infill soil sampling and trenching that could help to define one or more new drilling targets. The recently-identified Dennis' Folly area also was recommended for a modest infill soil-sampling program, the results of which could help define or improve a drilling target there as well (Weiss, 2017).

In October 2018, Paramount contracted Precision GeoSurveys of Langley, B.C., Canada to fly helicopter-borne aeromagnetic and radiometric geophysical surveys over the Grassy Mountain and Frost Area claims group. The Grassy Mountain claims group survey covered 13,400 acres within which 734 line-miles were flown with an Airbus AS350 helicopter. The results of this survey show the Grassy Mountain deposit lies within a large magnetic low (Figure 9-1). Magnetic highs are seen to outline the extents of intrusive rocks and basaltic units.


Figure 9-1: 2018 Aerial Magnetic Survey of Grassy Mountain Area

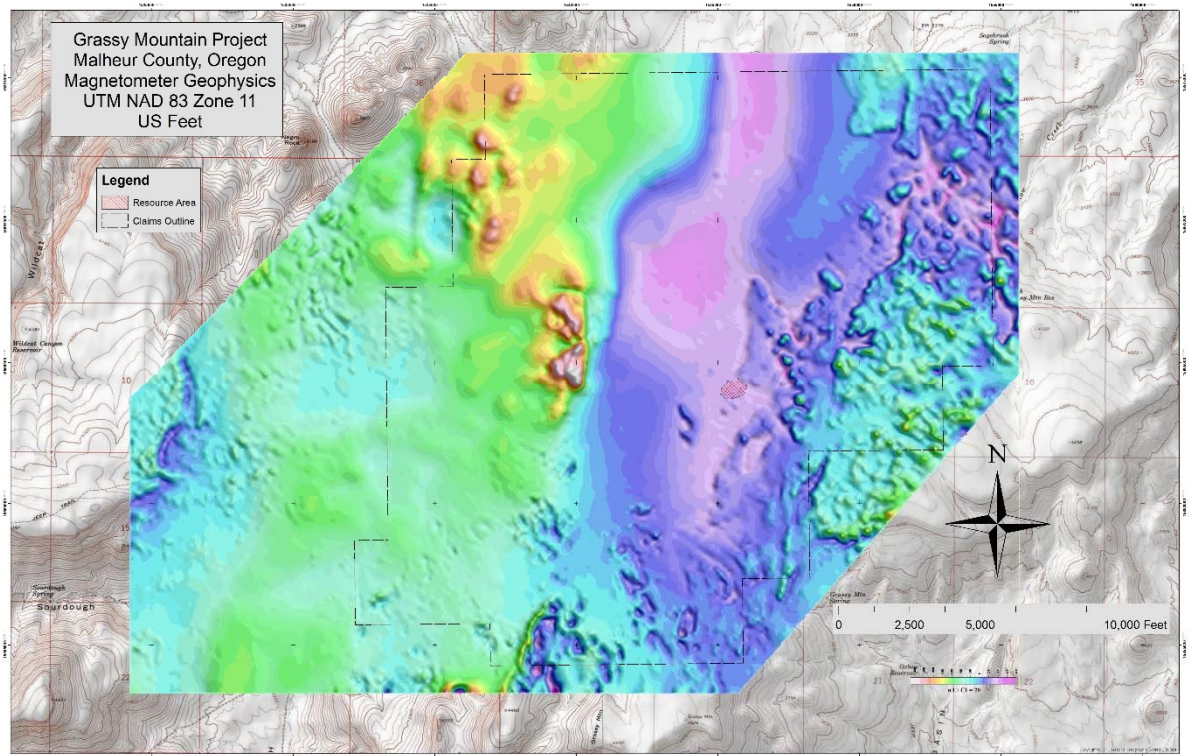

Note: Figure courtesy Paramount, 2018.

The aerial magnetic and radiometric survey of the Frost Area claims group covered approximately 1,935 acres. Results of this survey revealed significant magnetic lows that directly correlate with the known mineralized corridor (Figure 9-2).


Figure 9-2: 2018 Aerial Magnetic Survey of the Frost Target

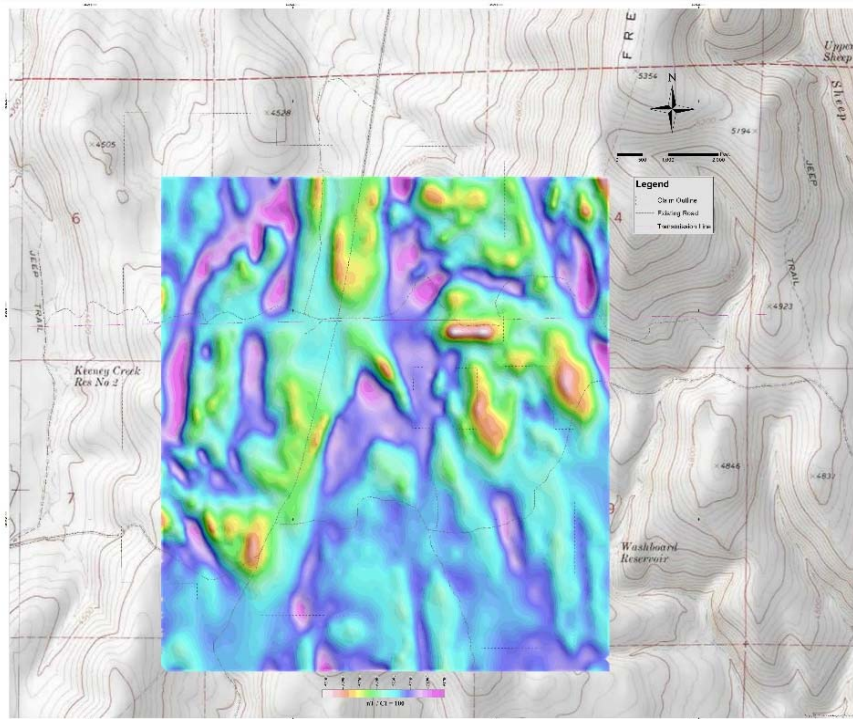

Note: Figure courtesy Paramount, 2018.


A CSAMT ground geophysical survey was completed in April 2019 at Frost. This survey covered 7.4 line-miles over an area of 790 acres and was centered on the known mineralized corridor. Results of the CSAMT survey show several resistivity anomalies (Figure 9-3 and Figure 9-4) that warrant consideration for drill testing.

Figure 9-3: 2019 Ground CSAMT Survey at Frost Target

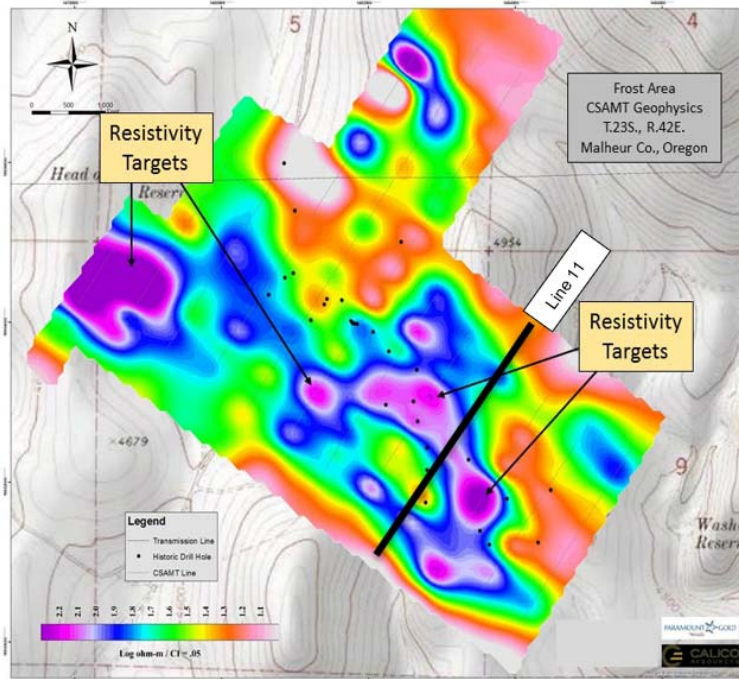

Note: Figure courtesy Paramount, 2020.

Figure 9-4: Cross Section Generated by 2019 CSAMT Data at Frost Target

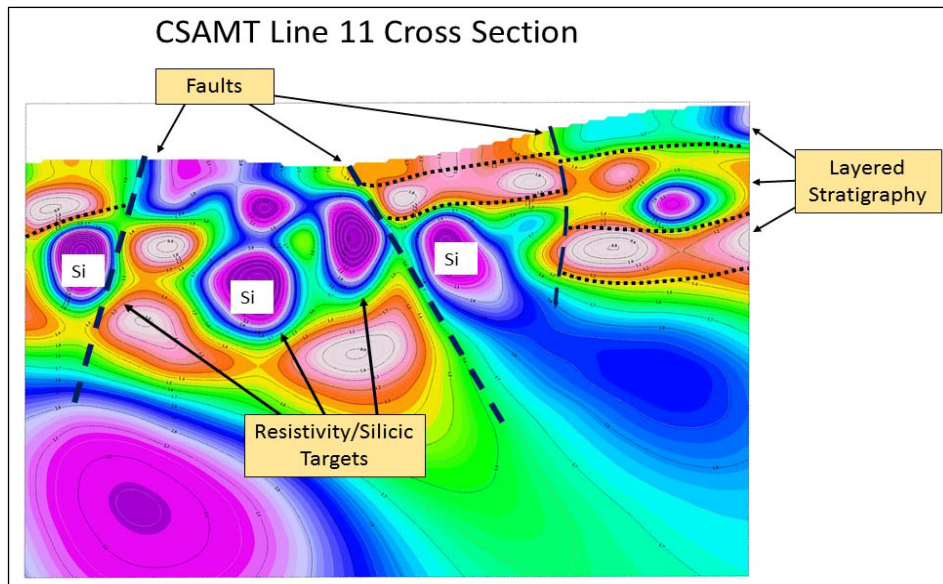

Note: Figure courtesy Paramount, 2020.

Calico completed geologic mapping, data compilation, and rock sampling in the Frost Area claims group. As of the effective date of this report, Paramount had not drilled in the Frost Area claims group.

10 DRILLING


10.1 Introduction

Drilling at the Grassy Mountain claim block is summarized in Table 10-1 and shown in Figure 10-1.

Table 10-1: Grassy Mountain Claim Block Drilling Summary

Year	Company	# Holes	Hole Type	Length (ft)	Area
1987–1991	Atlas	193	RC	154,963	Grassy Mtn
1989–1991	Atlas	5	Core	4,153	Grassy Mtn
1989–1991	Atlas	5	RC & Core	3,502	Grassy Mtn
1987–1991	Atlas	187	RC	62,895	Outlying Prospects
1987–1991	Atlas	10	RC	1,884	Water wells
1992–1996	Newmont	13	Core	13,101	Grassy Mtn
1992–1996	Newmont	2	RC & Core	1,909	Grassy Mtn
1998	Tombstone	4	RC	3,145	Grassy Mtn
1998	Tombstone	6	RC & Core	4,926	Grassy Mtn
2011	Calico	3	Core	2,531	Grassy Mtn
2011–2012	Calico	10	RC	8,518	Grassy Mtn
2012	Calico	4	RC	2,585	Outlying prospects
Historical Total:		442		264,112	
2016–2017	Paramount	3	RC	1,140	Grassy Mtn
2016–2017	Paramount	3	Core	1,933	Grassy Mtn
2016–2017	Paramount	24	RC & Core	19,907	Grassy Mtn
2018	Paramount	2	RC	1,600	North Spur Target
2019	Paramount	2	Core	931	Geotechnical
Paramount Total:		34		25,511	
All Drilling Total:		476		289,623	

Figure 10-1: Locations of All Drill Holes Within the Grassy Mountain Claim Block

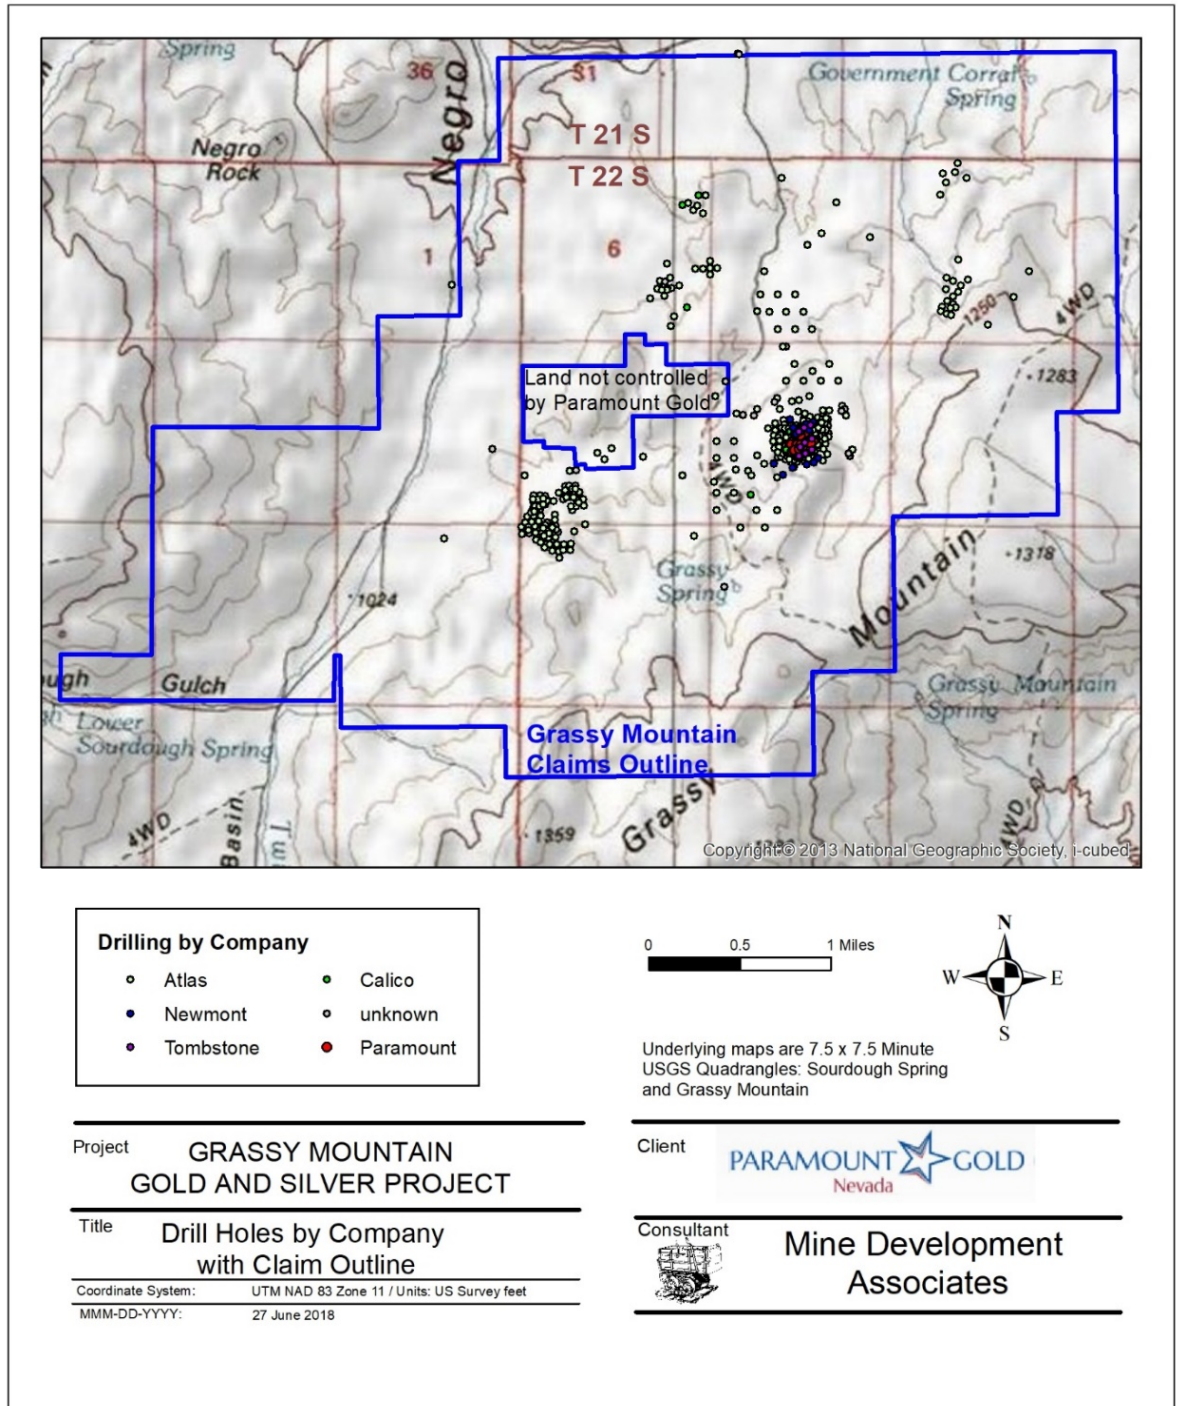

The database includes a total of 264,112 ft drilled by four historical operators, from 1987 through 2012, in 442 drill holes. Paramount drilled 34 holes for a total of 25,511 ft in 2016–2019 to bring the total


drilled within the claim block to 476 holes for 289,623 ft. Approximately 77% of the footage drilled was at, and adjacent to, the Grassy Mountain deposit area, although nearly 43% of the holes were drilled at outlying prospects (refer to Section 6.2), including the Crabgrass deposit, as well as for water wells. The bulk of the holes at the Grassy Mountain deposit area was drilled entirely by RC, accounting for 77% of the footage drilled. Holes drilled using core methods account for about 12% of the footage drilled in the deposit area, and holes drilled with RC pre-collars and core tails account for about 11% of the footage drilled. The locations of holes drilled in and near the Grassy Mountain deposit area through 2017 are shown in Figure 10-2. Figure 6-1 showed the collar locations of holes drilled to test outlying prospects within the Grassy Mountain claim block. The results of drilling at the outlying prospects are summarized in Section 6.2 and Section 6.3.

Within the Grassy Mountain deposit area, approximately 80% of the holes were drilled vertical, or within 3.0° of vertical. Approximately 69% of the core and core-tail holes were inclined at less than -80°. Overall results of drilling within the Grassy Mountain deposit are summarized with representative cross-sections presented in Section 14.0. At the outlying prospects, where all of the drilling was done with RC methods, approximately 98% of the holes were vertical. The median hole depth was 300 ft outside the Grassy Mountain deposit area.

In addition to the holes discussed above, three short, vertical core holes, for a total of 438 ft, were drilled in 2018 to the east of the Grassy Mountain deposit. The purpose of these holes was to obtain samples of unaltered and unmineralized basalt that is considered to be a potential source of aggregate and mine-backfill material. The samples were used in various geotechnical and geochemical evaluations. Four groundwater-monitoring wells (GM18-31 through GM18-34) drilled by Paramount in 2018 are also not included in the drilling summarized in this section.

Within the Frost Area claims group, WMC completed 32 RC holes for a total of 13,310 ft of drilling (refer to Section 6.2.2 for further information).

Figure 10-2: Locations of Holes Drilled Through 2017 in the Grassy Mountain Deposit Area

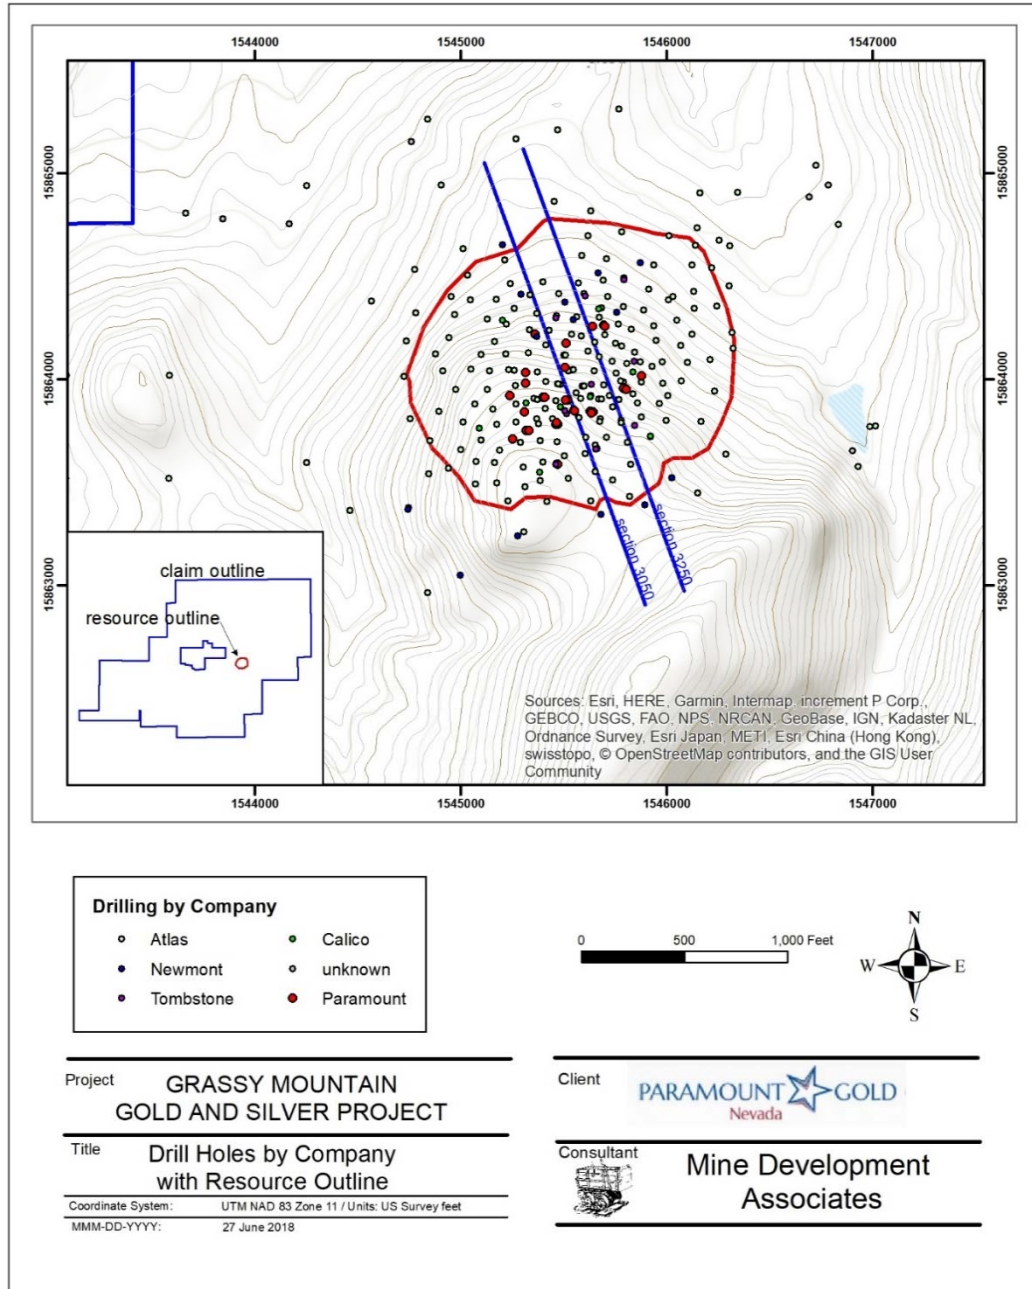

10.2 Historical Drilling 1987–2012

10.2.1 Atlas 1987–1992

A small track-mounted rig was mobilized in early 1987 to drill six holes in two target areas. Drill hole 026-004 intercepted 80 ft of mineralization averaging 0.021 oz/ton Au. A follow up drill program consisting of five holes was completed in the spring of 1988. Drill hole 026-009 is considered to be the Grassy Mountain deposit discovery hole, with an intersection of 145 ft of mineralization that averaged 0.075 oz/ton Au. By the end of 1991, Atlas had drilled 227,397 ft in 400 holes. Of the total, 13 holes were drilled for water wells and 187 holes were drilled at outlying prospects.

The Atlas RC holes were drilled by Eklund Drilling Company from Elko, Nevada, using Ingersoll Rand TH-60 and RD-10 truck-mounted drills with a nominal hole diameter of 5¼ inches (Lechner, 2007). The RC cuttings were sampled at 5-ft intervals. Twenty-three of the Atlas RC exploration holes were drilled to at least 1,000 ft in depth, and all of these are in the Grassy Mountain deposit area. RC drilling was “almost invariably” done dry, as groundwater was reportedly not encountered above 750-ft depths, with the exception of some local perched water that was intersected along the northern portions of the deposit. Because the deposit is strongly silicified, drilling penetration rates were slow and resulted in excessive bit wear. Drilling in certain areas was completed with some difficulty due to tight hole conditions and caving of rubble zones. In many cases, historical documentation is not sufficient to ascertain with confidence whether a particular hole was drilled dry or wet.

Atlas drilled 10 core holes at Grassy Mountain to confirm high-grade mineralization identified by RC drilling, obtain samples for metallurgical testwork, and to collect geotechnical data. Two confirmation core holes were drilled as NQ (1.875 inch) angle holes by Longyear, Incorporated (Longyear). Five core holes drilled specifically to obtain sample material for metallurgical testing were drilled as vertical PQ (3.345 inch) diameter holes by Boyles Brothers; these holes were pre-collared with RC. Three geotechnical holes were also drilled by Boyles Brothers. Assay records indicate that the confirmation holes were sampled on intervals ranging from 0.5 to 7.5 ft in length, with an average sample length of 4.5 ft. MDA is uncertain whether the core was mechanically split in half or sawed in half for sampling. Whole core from the metallurgical holes was shipped to Hazen Research Inc. for metallurgical testwork, and the geotechnical holes were logged for various geotechnical parameters such as rock quality designation (RQD), fracture frequency, etc.

An Atlas geologist was assigned to each drill rig and was responsible for the placement of the rig, drilling and sampling methods, hole depths, and lithologic logging.

The Atlas drilling discovered and completed the initial delineation of the Grassy Mountain deposit. Atlas also discovered and completed all drilling of the Crabgrass deposit.

10.2.2 Newmont 1994

Newmont drilled 15 angled core holes, including a wedge drilled off the first hole. Two of the last three core holes were pre-collared with RC. This drilling totaled 15,010 ft and was conducted by Longyear of Spokane, Washington. All of the holes were drilled with HQ (2.5 inch) diameter core, with the exception of six drill holes in which the HQ core was reduced to NQ-size due to ground conditions. The RC pre-collar portions were sampled over intervals of 5.0 ft. Approximately 90% of the core was sawed in half for sampling, with the remainder mechanically split in half.

Newmont determined that high-grade gold was hosted by steep, southeast-dipping quartz–chalcedony–adularia veins. The steep southeast dip was inferred from comparison of vein/core intersection angles from southeast-directed holes with those in northwest directed holes. High-grade gold mineralization was inferred to have a relatively sharp base at an elevation of 3,000 to 3,100 ft.

10.2.3 Tombstone 1998

In 1998, Tombstone drilled six core holes with RC pre-collars and four complete RC holes that altogether totaled 8,071 ft of drilling at the Grassy Mountain deposit. Dateline Drilling Incorporated (Dateline) from Missoula, Montana performed all of Tombstone's RC drilling. RC samples were collected over 2.5 and 5.0-ft intervals, with both interval lengths sometimes used in the same drill hole. The RC drilling was conducted wet, as water and mud was used for hole conditioning. The core drilling was done by Ray Hyne Drilling of Winnemucca, Nevada, while Dateline completed the RC drilling. Approximately 80% of the core was sawed in half for sampling, with the remainder mechanically split in half.

The Tombstone drilling was concentrated in the higher-grade core of the deposit, with the goal of better defining the higher-grade mineralization. The Tombstone results, however, were judged not to have included the very high-grade (>2 oz/ton Au) component of the Grassy Mountain mineralization that was encountered in previous Atlas RC and Newmont core holes (French, 1998). French (1998) theorized that the lack of very high-grade intersections might be due to the drilling and related sampling problems encountered during the program. He recommended the use of a more powerful RC rig that would be less susceptible to poor ground conditions and therefore require less hole reaming and conditioning, which would lead to uninterrupted drilling and sample collection.

10.2.4 Calico 2011–2012

Calico commenced drilling in August 2011. Three core holes were drilled at the Grassy Mountain deposit using a modified track-mounted LF-90 core drill operated by Marcus and Marcus Drilling Company, of Post Falls, Idaho (Marcus and Marcus). HQ diameter core was drilled using a triple-tube core recovery barrel. Operating 24 hours per day, a total of 2,530.5 ft of drilling was completed, with average production of 39 ft per day.

A truck-mounted Ingersoll-Rand TH-75 drill operated by Boart Longyear, of South Jordan, Utah, began RC drilling at the Grassy Mountain property in October 2011. The drill utilized a cyclone wet splitter for sample collection, with an approximate 40% split retained in the sample bag. Drill cuttings passed through a cyclone and then divided into three streams through the splitter: one for sampling, one for logging and retention for reference, and the excess discarded to the sump. A portion of the sample collected for logging was placed into a plastic chip tray labeled with the hole number and the depth from which the sample was taken. The drill helper collected one sample for each 5-ft interval in bags pre-labeled with the sample number under supervision by the site geologist. Each sample bag was sealed at the drill site and remained unopened until it reached the analytical laboratory. After each 20 ft length of drill rod was added to the drill string, the hole was cleaned of material which may have descended while the new section of rod was installed. Calico's 2011 RC samples were partially dried at the drill site prior to shipment for assay. Samples received at the assay laboratory had an average weight of 20 lb.

The RC drill operated on a single 12-hour daily shift. A Calico geologist was on-site during drilling to monitor the drilling and sample collection, log the drill cuttings, and collect and store a portion of the drill cuttings for future reference. The RC drill rig completed nine holes at the Grassy Mountain deposit area totaling 7,668 ft.

During June of 2012, Calico drilled a total of 3,435 ft in 5 RC holes. One hole was drilled in the Grassy Mountain deposit area, one was drilled in the Wheatgrass area, one was drilled at the Wood area, and two holes were drilled at the Wally area. Leach Drilling of Dayton, Nevada was contracted for the job using an Ingersoll-Rand DM25/RC track-mounted rig. A cyclone wet splitter was used for sample collection with approximately 40% of the sample retained in the sample bag for analysis. The sampling procedures were the same as those used in 2011. The drill operated on a single 12-hour daily shift. A Calico geologist was on-site during the drilling to monitor the drilling and sample collection, log the

drill cuttings, and collect a portion of the drill cuttings for future reference. The drill program was completed on June 28.

The 13 holes drilled at the Grassy Mountain deposit area increased the drill density within the higher-grade core of the deposit, with the core holes providing additional information regarding the higher-grade mineralization. The hole drilled at Wheatgrass returned results consistent with existing holes in the target area, while the hole drilled at the Wood target was drilled almost 450 ft from the nearest drill hole and returned only very low-grade intersections. The first hole drilled in the Wally area unsuccessfully tested the western extension of previously-defined mineralization, while the second drill hole returned similar results as the existing drill holes and thereby confirmed the extension of this low-grade mineralization about 200 ft to the north.

10.2.5 Paramount 2016–2019

Paramount conducted infill, geotechnical, and metallurgical drilling at Grassy Mountain in 2016 through 2019. The drilling focused on the central higher-grade core of the deposit and significantly improved Paramount's knowledge of the continuity and styles of mineralization within this core zone, while also providing samples for geotechnical and metallurgical testing. The results of the 2016 and 2017 drilling contributed significantly to the estimation of the Grassy Mountain Mineral Resources.

Paramount drilled 22,980 ft in a total of 30 holes within the higher-grade core of the Grassy Mountain deposit in 2016 and 2017. The goals of this drilling program included: (i) the verification of the historical drill data, particularly the historical RC holes; (ii) substantially increasing the quantity of drill core derived from the higher-grade portion of the deposit; (iii) obtaining better definition of the controls and extents of the higher-grade mineralization; and (iv) obtaining drill core for use in detailed geotechnical logging and metallurgical testing. Two RC holes were drilled in 2018 at the North Spur target, located a short distance to the north of the Grassy Mountain deposit, and two geotechnical core holes were drilled in 2019 within the lower-grade peripheries of the Grassy Mountain deposit. The 2019 drilling included a short, vertical hole (100-ft depth) drilled near the planned mine portal and a deeper hole (831-ft down-hole depth) drilled at -70° to penetrate an area of the planned underground access ramp.

Prior core drilling experienced significant problems due to poor ground conditions, particularly in the uppermost portion of the deposit down to the bottom of the upper sinter package. Paramount therefore decided to pre-collar the core holes with RC to depths of approximately 400–500 ft, which then allowed for core drilling throughout the higher-grade core of the deposit.

Major Drilling America Inc., of Salt Lake City, Utah (Major Drilling) was contracted for both the RC and core drilling. RC pre-collars were drilled with a Schramm T450GT track-mounted drill that was operated on a single 12-hour daily shift. A $6\frac{1}{2}$ inch diameter RC bit was used to the planned pre-collar depth. Once the planned depth was reached, $4\frac{1}{2}$ inch steel casing was set for the entire length of the hole and the drill rig was moved to the next RC pre-collar location.

During the RC drilling, small amounts of water were injected down the hole to control dust emissions. RC samples were collected at nominal 5-ft intervals via a cyclone rotary splitter and center-discharge tube into 20-inch by 24-inch sample bags that were pre-numbered by Paramount geologists or geotechnicians. Samples typically weighed approximately 15–20 lb for each sample interval. A Major Drilling sampling assistant was on-site during drilling operations to monitor the drilling, perform the sample collection, and collect and store a portion of the drill cuttings in plastic chip trays for future reference and logging. The sampling assistant was trained by a Paramount geologist who was on-site for the first seven RC pre-collars.

Duplicate RC samples were collected at the rate of approximately one per 40 regular sample intervals. For duplicate samples, the primary sample was collected from the center discharge tube of the rotary splitter and the duplicate sample was collected from the side discharge tube of the rotary splitter. A "Y-type" splitter was not used at any time for duplicate samples.

Core drilling was completed with two track-mounted drills: a Boart Longyear LF-90 drill, and a Boart Longyear LF-230 drill. Both rigs drilled HQ diameter core using a triple-tube type core barrel. The drills operated 24 hours per day on two 12-hour shifts, each manned by a two-man crew. A drill foreman was on site as well. A single water truck and driver was able to supply adequate water for the two drills, hauling water from a well approximately one mile north of the drilling area.

Drilling of the first RC pre-collar began in November 2016 and seven RC pre-collars totaling 2,695 ft were completed during the year. Core totaling 3,078 ft was drilled in six holes in 2016. Drilling was suspended from mid-December 2016 through early March 2017. During March, April, and May of 2017, 20 RC pre-collars totaling 8,556 ft were drilled. From March through June of 2017, 8,651 ft of core were drilled in 21 holes. Footages drilled by pre-collar RC and core methods are shown in Table 10-2.

Table 10-2: Paramount 2016–2019 RC Pre-Collar vs. Core Lengths

Drill Hole	Pre-Collar RC From (ft)	Pre-Collar RC To (ft)	Core From (ft)	Core To (ft)	Total RC (ft)	Total Core (ft)	Notes
GM16-01	0	380			380	0	Stuck hammer
GM16-02	0	400	400	742	400	342	
GM16-03	0	380	380	785	380	405	
GM16-04			0	744.5	0	744.5	Geotech hole
GM16-05	0	360	360	618	360	258	
GM16-06	0	400	400	731	400	331	
GM17-07	0	391	391	850.5	391	459.5	
GM16-08	0	375			375	0	Twisted off rods
GM16-09	0	400	400	795	400	395	
GM17-10	0	400	400	822	400	422	
GM17-11	0	385			385	0	Stuck hammer
GM17-12	0	395	395	689	395	294	Re-drill of GM16-08
GM16-13			0	438.5	0	438.5	Twisted off rods
GM16-14			0	750	0	750	Geotech hole
GM17-15	0	320	320	780	320	460	
GM17-16	0	480	480	923	480	443	
GM17-17	0	480	480	929.5	480	449.5	
GM17-18	0	450	450	884.5	450	434.5	
GM17-19	0	450	450	857.5	450	407.5	
GM17-20	0	380	380	856	380	476	
GM17-21	0	460	460	832	460	372	
GM17-22	0	500	500	953.5	500	453.5	
GM17-23	0	400	400	956	400	556	
GM17-24	0	450	450	896	450	446	
GM17-25	0	400	400	887	400	487	
GM17-26	0	520	520	875	520	355	
GM17-27	0	440	440	772	440	332	
GM17-28	0	420	420	862	420	442	

Drill Hole	Pre-Collar RC From (ft)	Pre-Collar RC To (ft)	Core From (ft)	Core To (ft)	Total RC (ft)	Total Core (ft)	Notes
GM17-29	0	440	440	800	440	360	
GM17-30	0	400	400	810	400	410	
GM18-35	0	800			800	0	North Spur
GM18-36	0	800			800	0	North Spur
GM19-37			0	831	0	831	Geotech hole
GM19-38			0	100	0	100	Geotech hole

Average drill production was 142 ft per 12-hour shift for RC, and 31.1 ft per drill, per 12-hour shift, for core drilling. Three of the RC pre-collars encountered extremely bad ground conditions that led to premature terminations of the holes and precluded the drilling of core in these holes. All of the goals of Paramount's drilling program were achieved. Beyond obtaining core for detailed geotechnical logging and metallurgical testing, the drill core aided in furthering the understanding of the geology of the deposit, which largely confirmed many of Newmont's conclusions. This in turn formed the base from which the resource model was constructed. Finally, the results of the Paramount drilling program have aided in the verification of the historical data (e.g., see discussion of estimating with and without Paramount drill data in Section 14.9).

10.3 Drill-Hole Collar and Down-Hole Surveys

For the Atlas drilling, collar locations were surveyed by Apex Surveying from Riverton, Wyoming using a total station. Most holes were not surveyed for down-hole direction and deviation, except four RC holes and all of the core holes, which were surveyed using an Eastman down-hole camera (Lechner, 2007).

It is not known with certainty whether Newmont's collar locations were surveyed. Down-hole deviation surveys of the Newmont holes were performed by Scientific Drilling from Elko, Nevada. Newmont handwritten "Drill Hole Summary" sheets indicate that the holes were surveyed using a "gyro" instrument.

For the Tombstone drilling, there are no written records of how the collar locations were surveyed (Lechner, 2007). Surveys of down-hole deviation were reportedly done by Silver State Surveys of Elko, Nevada using a gyroscopic survey tool, but no written records are present in Paramount's archives. No down-hole survey data are available for three of the Tombstone drill holes.

Until Calico's involvement in the Project in 2011, Project coordinates were based on a local grid established by Atlas. All Calico and subsequent drill-hole collar surveys were collected directly in UTM coordinates. Section 12.1 includes a discussion on the transformation of historical mine-grid collar locations into UTM coordinates.

During 2011 and 2012, drill collar locations were surveyed by Calico personnel using hand-held Garmin global positioning system (GPS) units with a horizontal accuracy on the order of ± 10 ft, and later surveyed with a Trimble, survey-grade GPS to ± 0.1 ft. Drill holes were marked in the field with a lath and/or stake.

The 2011 core holes were surveyed for down-hole directional deviation by Marcus and Marcus using a REFLEX EZ-Track survey instrument to obtain multi-shot readings. The 2011 RC holes were surveyed for down-hole deviation by International Directional Services (IDS) using a Goodrich-Humphrey surface-recording gyroscopic system. Deviation from planned orientations was generally on the order of 3° for core and RC holes, although some of the RC holes deviated by up to 6° in azimuth and 8° in dip.

Down-hole surveys were not performed in the first four of the 2012 RC holes. The final 2012 hole, CAL12R17, was surveyed for down-hole deviation by IDS using a Goodrich-Humphrey surface recording gyroscopic system.

During Paramount's 2016–2017 drilling program, the Paramount drill-collar locations, as well as many of the historical drill collars in the Grassy Mountain deposit area (see Section 12.1.1), were surveyed by Atlas Land Surveying of Fruitland, Idaho. The coordinates for the holes drilled in 2018 and 2019 were determined by handheld GPS. The owner of Atlas Land Surveying, Dean J. Coon, is a Registered Professional Land Surveyor (Oregon 65687LS) and was responsible for the field work, data processing, and reporting. All survey work was completed using real-time kinematic (RTK) surveying techniques with Topcon Hiper V GPS Receivers. In RTK mode, the stated accuracy of the measurements is within 10 mm \pm 1 mm for horizontal data and 15 mm \pm 1 mm for vertical data. Static data were collected in the field and then submitted to the National Geodetic Service Online Positioning User Service to derive accurate geodetic coordinates tied to the National Spatial Reference System. Using these coordinates, the RTK data were processed through a survey measurement adjustment program, "StarNET", to determine the final coordinates for the located points. These data were projected to the Universal Transverse Mercator grid using the NAD83 datum in units of US Survey feet.

Down-hole deviation surveys were obtained from 25 of the 2016 and 2017 Paramount drill holes, the two holes drilled in 2018, and the deeper of the two geotechnical holes drilled in 2019. These surveys were performed by IDS of Elko, Nevada using a Goodrich surface-recording gyroscopic system (SRG). The SRG is capable of mapping the direction of boreholes and is unaffected by steel pipe or local magnetic-field anomalies. Five of the 2016–2017 drill holes had blockages, such as lost or stuck pipe, casing, or core barrel, that prevented down-hole surveys.

10.4 Sample Quality

10.4.1 Core Samples


In consideration of the presence of visible gold in the drill core, Newmont decided to evaluate the potential for unrepresentative loss of gold in the splitting of drill core for sampling. During the sampling of their first hole (GMC-001), the minus 10 mesh fines produced during the sawing of drill core into halves were collected for each sample, weighed, and assayed separately (Jory, 1993). Jory (1993) reported that the mean of the gold assays of the 171 samples of saw fines collected was 86% higher (0.044 versus 0.024 oz/ton Au) than the associated half-core samples sent to the laboratory. Jory (1993) noted that since the saw fines accounted for less than 0.5% of the total sample weight, sampling of the saw fines was discontinued. However, Newmont did take 38 additional saw-fines samples for hole GMC-001-9, a core wedge off of GMC-001, for which the assay certificate is available. The average of the saw-fines assays is 0.438 oz/ton Au and the mean of the half-core assays is 0.143 oz/ton Au; Newmont did not obtain silver assays for any of their drill samples. The high bias in the saw fines relative to the half-core samples is present at all gold grades, but it increases as the grade increases.

While the unrepresentative loss of gold to the saw fines is not material due to the small amount of these fines relative to half-core samples, these data suggest the potential for the unrepresentative loss of gold to fines that may be generated by other means. One such possibility is in fines that collect in core boxes from broken intervals, which clearly warrant careful collection and splitting along with the sawing of competent pieces of core. Newmont brushed fines out of the core boxes for each sample interval and split the fines into halves, with one half added to the sample bags of sawed core sent to the assay laboratory and the other half bagged and returned to the core boxes.

Fines can also be lost below the surface during the drilling of core. In an attempt to evaluate this possibility, the relationship between geotechnical data (core recovery and RQD) collected during the

logging of the core and gold grades was examined. Figure 10-3 summarizes the relationship between gold grade and RQD for all Grassy Mountain core holes for which RQD data are available.

Figure 10-3: Gold Grade vs. RQD

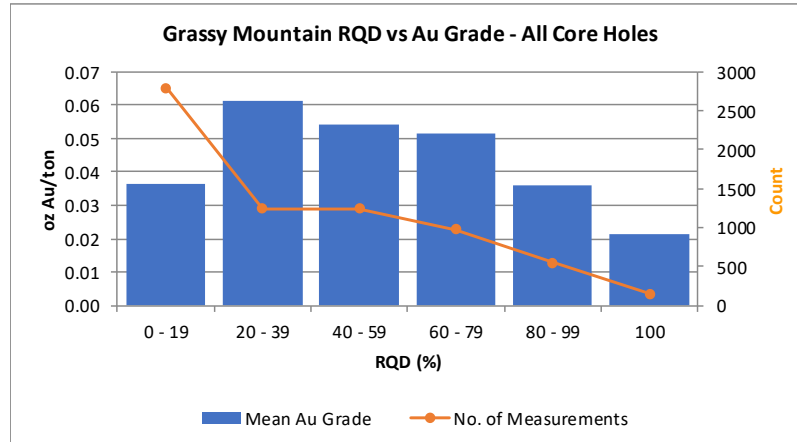


Note: Figure prepared by MDA, 2018.

Each blue bar in the graph includes data within a 20% RQD bin, as indicated on the x-axis (RQDs of 100% and greater report to the “100” bin). The heights of the bars are indicative of the average grade of all intervals within the each of the recovery bins, as shown on the y-axis of the left-hand side of the graph. The total number of RQD intervals in each recovery bin is displayed by the orange line, with the scale provided by the y-axis on the right-hand side of the graph.

With the exception of the lowest RQD bin, there is a consistent correlation between RQD and gold grade in which gold grades increase as RQD decreases. This negative correlation is at least in part due to the relationship of higher-grade mineralization with highly fractured zones that yield low RQD values. In some deposits, unrepresentative loss of soft, clay-rich, and relatively unmineralized material from the recovered drill core occurs in low RQD zones, which would lead to increased grades in the recovered samples of core. The Grassy Mountain mineralization of all grade ranges is associated with uniformly strong silicification; however, so this mechanism of apparent grade increases is unlikely. As far as the possibility of losing gold related to fines during drilling, the negative correlation between RQD and gold grade does not provide evidence of this, but potential losses cannot be definitively ruled out.

The RQD measurements used in this analysis were extensively reviewed and edited to assure their validity. The bulk of the core-recovery data has not gone through this validation and has many inconsistencies that need to be resolved. Two Paramount drill holes were validated, and the relationship between recovery and gold grade for these holes is summarized in Figure 10-4.

Figure 10-4: Gold Grade vs. Core Recovery

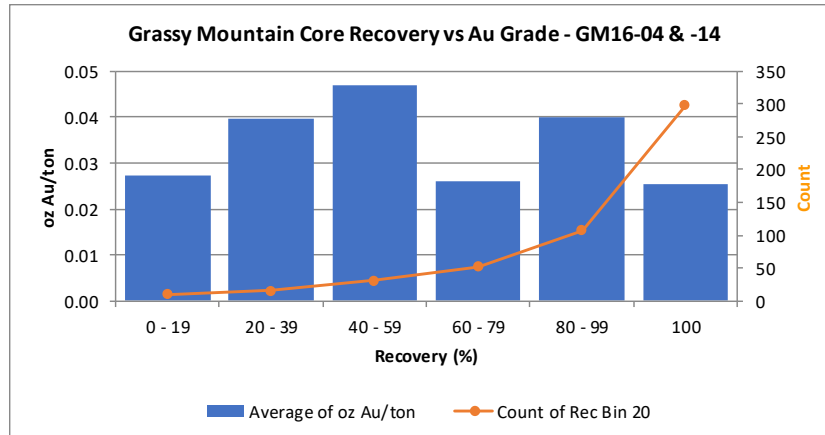

Note: Figure prepared by MDA, 2018.

No clear trend is evident in the data at core recoveries of 60% and greater. Gold grades decrease with decreasing recoveries for core recoveries lower than 60%, but the number of recovery intervals in each bin is relatively low and likely insufficient to support definitive conclusions.

10.4.2 RC Samples

Due to the nature of RC drilling, the possibility of contamination of drill cuttings from intervals higher than the drill bit in the hole is a concern, especially when groundwater is encountered or fluids are added during drilling. Atlas RC holes were reportedly drilled dry unless groundwater was intersected, while Tombstone, Calico, and Paramount RC holes were drilled entirely wet. Comments on geologic logs and other historical documentation suggest that the water table at Grassy Mountain lies near the base of the higher-grade core of the deposit, with ‘perched’ groundwater noted in a few holes at much higher elevations.

Down-hole contamination can sometimes be detected by careful inspection of the RC drill results in the context of the geology (e.g., anomalous to significant assays returned from samples from post-mineral units), by comparison with adjacent core holes, and by examining down-hole grade patterns.

Cyclic down-hole grade patterns are evident in some of the RC holes at Grassy Mountain. These cycles consist of high gold grades (relative to adjacent samples) every fourth 5-ft samples drilled with the same 20-ft drill rod. In a classic case, the first sample of the drill rod will have the highest grade, while the following 3 samples will gradually decrease in grade. This ‘decay’ pattern in grade is caused by the accumulation of mineralized material (derived from some level higher in the hole than the drill bit) at the bottom of the hole as the drilling pauses and a new drill rod is added to the drill string. When drilling resumes, the first sample has the greatest amount of contamination, and the successive samples are gradually ‘cleaner’ as the accumulated contamination decreases and the continuing contamination experienced during the drilling is overwhelmed by the material being drilled. This decay pattern is usually possible to detect only while drilling barren or very weakly mineralized rock. Even in cases where this cyclic gold contamination is of such low grade as to have minimal impact on resource estimation, its presence suggests that similar, and possibly more serious, contamination may have occurred higher in the hole within mineralization, where the contamination can be impossible to recognize.

Atlas did not believe down-hole contamination was a “significant or consistent problem” but did recognize that the bottom of hole 026-034 could be contaminated over a 200-ft interval. During the resource modeling and related detailed review of the Project data, MDA identified 21 drill holes with suspected down-hole contamination of precious-metals values, primarily based on cyclic patterns

described above. These intervals are all at the lowermost portions of the holes, and they were either excluded from the mineral domains that constrain the resource estimations or were excluded from use in the resource estimation on the basis of a “no use” code in the assay table.

10.5 Summary Statement

The drilling and sampling procedures provided samples that are believed to be representative and of sufficient quality for use in the resource estimations discussed in Section 14. The QP is unaware of any sampling or recovery factors that have not been addressed that would materially impact the Mineral Resources discussed in Section 14.

Down-hole drilled lengths of the higher-grade gold and silver portions of the deposit, some of which are oriented at high angles, could significantly exaggerate true mineralized thicknesses in cases where steeply dipping holes intersect the steeply dipping mineralization. A very high percentage of the Atlas holes were drilled vertically. Possible effects of exaggerated down-hole lengths on the estimation of the current resources was carefully monitored and the model is believed to appropriately represent the higher-grade volumes.

The average down-hole length of the sample intervals used directly in the estimation of the resource gold and silver grades is 4.76 ft, with a minimum length of 0.3 ft and a maximum of 12 ft. The sample lengths are considered appropriate for the Grassy Mountain deposit.

Only four of the 177 Atlas RC holes that directly contribute assay data to the resource estimation were surveyed for down-hole deviation. The four drill holes that were surveyed deviated from 14 to 35 ft horizontally from the drill collar positions to the distinct lower contact of the higher-grade zone (see Section 14), which lies approximately 800 ft below the surface. The average horizontal deviation is 22 ft. In consideration of the block size of the resource model (5 x 10 x 10 ft; model x, y, z) and other factors related to the resource estimation, this level of deviation is not considered to be a serious issue.

11 SAMPLE PREPARATION, ANALYSES, AND SECURITY

11.1 Introduction

This section summarizes all information known to the QP relating to sample preparation, analysis, and security, as well as quality assurance and quality control (QA/QC) procedures, that pertain to the Grassy Mountain drilling data. The information has either been compiled under the supervision of the QP from historical records as cited, or provided by Mr. Michael McGinnis, the Project Manager for Paramount.

11.2 Sample Preparation, Analysis and Security

11.2.1 Atlas 1987–1992

The Atlas RC samples were split at the drill site to weigh between 8–15 lb, averaging approximately 12 lb, and were collected in 10-inch by 17-inch olefin sample bags. An Atlas geologist was stationed at the drill rig and with the samples at all times. Wet RC cuttings were split using a variable wet-cone splitter positioned below the cyclone on the RC rigs. Dry cuttings were split under the cyclone with a Jones splitter. The samples were delivered to a secure storage facility in Vale at the end of each shift by Atlas project geologists. The samples were routinely picked up from the Vale storage facility by Chemex Analytical Laboratories (Chemex) personnel and delivered to their preparation facility located in Boise, Idaho. The samples were dried at 100°C, cone crushed to minus 1/8 inch, and then 300-g subsamples were taken using a Jones riffle splitter. These subsamples were then reduced to 95% passing 100 mesh using a ring and puck pulverizer. The coarse reject materials were placed in storage at the Boise facility for possible future use. The 300-g pulps were shipped by Chemex to their assay facility located in North Vancouver, Canada. Gold and silver were assayed using 30-g aliquots that were analyzed by fire assay fusion, primarily with an atomic absorption (AA) finish.

It is not known what type of certification Chemex may have had in 1987–1990, but it was a well-known, commercial assayer and was independent of Atlas.

11.2.2 Newmont 1992–1996

Jory (1993) reported that the Newmont core was cut into halves at the Vale field office with vein apices oriented perpendicular to the saw blade. Material too fine to be sawed was carefully swept out of the core boxes for each sample interval, split into halves using a Jones splitter, and recombined with the half-core to be sent for assaying. Newmont core boxes in the possession of Paramount include core fines inside zip-lock plastic sandwich bags, presumably representing the remaining half-split of fines for each sample interval.

Jory (1993) documented that the core samples were picked up by Rocky Mountain Geochemical Corporation (RMGC) from the Atlas storage facility in Vale, and delivered to the RMGC facility located in Salt Lake City, Utah, for sample preparation and analysis. A copy of a Newmont report that lacks a title page states that: “*Coarse gold (up to 500 microns) problems necessitated careful sample prep procedures for Grassy Mountain core*”. Samples were dried at a temperature of 100°C, crushed to minus 10 mesh, split in half with a Jones riffle splitter, and coarse pulverized to minus 48 mesh. A 200-g split of the minus 48 mesh material was then ring-pulverized to a nominal, minus 150 mesh particle size, from which a 30-g aliquot was fire assayed with gravimetric and AA finishes.

Newmont had screen-fire assays completed at RMGC on 20 samples from drill holes GMC-001 and -002 that had original gold assays in excess of 0.20 oz/ton Au.

There is no documentation regarding the sample security methods Newmont employed during their drilling campaigns.

It is not known what type of certification RMGC may have had in 1992–1996. RMGC was a well-known, independent commercial assayer of that era and was independent of Newmont. The Newmont check analyses were completed by their in-house laboratory, and therefore were not independent of Newmont. These check analyses exist only in paper form and should be added to the Project database.

11.2.3 Tombstone 1998

Tombstone RC cuttings were passed through a rotary wet splitter below the cyclone to produce samples weighing 10–15 lb. The splitter was washed before each new sample was taken. A five-gallon bucket placed under the splitter collected the wet samples, the water was partially decanted out of the bucket, and the RC cuttings and remaining fluid were emptied into the sample bag. The bucket was then washed to empty remaining fines into the sample bag as well, and then the sample bags were closed with one-way plastic ties. Tombstone brought the samples to the Vale field office, where they were later picked up by American Assay Laboratory (AAL) of Sparks, Nevada.

The RC and half-core samples were prepared and analyzed by AAL. The samples were dried at 100°C, crushed to 8 to 10 mesh, and then passed through a Jones riffle splitter to produce a four-pound subsample. These subsamples were pulverized to 90% -150 mesh, blended, and then a 350-g split was taken. A 30-g aliquot from the 350-g split was then analyzed for gold by fire assaying with an AA finish (AAL method FA30). Silver was analyzed by method D210, which included aqua-regia digestion. AAL was independent of Tombstone and remains a well-known commercial laboratory. It is not known what type of certification AAL may have had in 1998.

11.2.4 Calico 2011–2012

The 2011 and 2012 drilling samples were transported from the drill sites by Calico personnel to the Calico sample handling and core logging facility located in Vale. For drill core, the date, box number, number of boxes transported, and beginning and ending footages of the transported core were recorded on a core handling form.

At the logging facility, Calico personnel measured and recorded core recovery and RQD data. The core was then logged by a Calico geologist who recorded lithological, alteration, mineralization, and structural information, including the angle of intersection of faults with the core, fault lineations, fractures, veins, and bedding. The entire length of core was then prepared for sampling. Sample intervals were based on the geological logs in an effort to separate different lithologies and styles of mineralization and alteration. Sample length generally did not exceed 5 ft and, where possible, correlated to the 5-ft drilling runs. If any significant veins, veinlets, healed breccias, or other potentially mineralized planar features were present, the geologist marked a line down the length of the core where the core should be sawed or split to ensure a representative sample was taken by the sampler. After logging was completed, sample intervals were marked and assigned a unique sample identification (sample tag), with the sample tag stapled inside of the box at the end of each sample interval. A duplicate sample tag for each interval was placed inside the sample bag, and the sample number was recorded in the sample tag booklet. If contamination or down-hole caving was observed, the interval was flagged and not sampled.

Once the core logging was complete and all of the sample intervals were marked, the core was sprayed with water and photographed. The core boxes were then moved to the sampling station where a technician either split the core with a hydraulic splitter or cut the core in half with a diamond-blade core saw. One half of the core was placed into a cloth sample bag labeled with the sample number. The other half was placed back into the core box for future reference. Core that was intensely broken or very soft was split in half using a small scoop or putty knife and 1 of the halves was placed in the sample bag. The responsible technician filled out a core cutting/splitting form recording the sample number, the starting and ending footage of the sample interval, the date, and the technician's initials.

The sample bags were tied off and stored in the secure core facility until the sample batch was ready to be shipped.

RC samples were typically left at the drill site for two to three days to dry, before being transported by Calico personnel to the Calico storage and core logging facility in Vale. The date and the number of samples transported were recorded on a sample handling form. The samples were arranged in a manner to ensure that all samples, blanks, and standards were accounted for, and were photographed prior to shipment for analysis. RC samples were then air-dried and stored until shipped by commercial freight service to the ALS Minerals (ALS) laboratory in Reno, Nevada.

When all of the core and RC samples were prepared for shipment, they were laid out in order (including quality assurance/quality control samples) at the Calico logging facility in Vale. A complete sample inventory was filled out and maintained as an Excel spreadsheet to verify that all samples were accounted for and that bags were not damaged prior to shipment. Drill core sample bags were placed into rice bags, and each rice bag was sealed with a numbered security seal. RC samples were placed into super sacks and each super sack was sealed with a numbered security seal. Only samples from a single drill hole were included in a shipment. A sample submittal form was prepared with the shipment number, security seal numbers, the sample numbers, the type of analyses requested, and a list of samples to be duplicated. A hard copy of the submittal form was included with the sample shipment and an electronic copy was emailed to the laboratory. A chain of custody form was filled out by the Calico personnel who prepared the shipment. This form included the sample shipment number, the location the samples were shipped from, the total number of containers in the shipment, the security seal numbers, name of the person who prepared the shipment, name of the person who transported the shipment, and the name of the person who received the shipment at the laboratory. When the form was completed at the laboratory by the receiving individual, any damage or discrepancies were noted on the form and the form was sent back to Calico. The driver of each truck was required to sign off on the chain of custody form.

Calico's 2011 and 2012 drilling samples were shipped by a commercial freight service to ALS. ALS was independent of Calico and maintained an ISO 9001:2008 accreditation for quality management and ISO/IEC 17025:2005 accreditation for gold assay methods.

ALS crushed the samples to 75% passing <6 mm and then split off a 250-g subsample for pulverization to 85% passing <75 μm (200 mesh). Cleaner sand was run through the crusher every 5 samples or at any color change in the sample noticed by the ALS technicians. Cleaner sand was run through the pulverizer between every sample in the pulverizing step. Pulps were split to separate a 30-g aliquot for determining gold by fire assay with AA finish (ALS code Au-AA23). A separate 5-g aliquot was used for inductively coupled plasma atomic-emission spectrometric (ICP-AES) determination of silver and 32 major, minor, and trace elements following a 4-acid digestion (ALS code ME-ICP61). Additional aliquots were taken from the same pulp for fire assay with gravimetric finish (ALS code Au-GRA21) if the original gold assay exceeded the 10 g/t Au (0.29 oz/ton Au) upper limit of the analyses. Samples that yielded silver assays greater than 100 g/t Au (2.92 oz/ton Au) were reanalyzed using a 10-g aliquot with a four-acid digestion for silver and an AA finish (ALS code AG-OG62). Samples that assayed greater than 1,500 g/t Ag (44 oz/ton) were reanalyzed using a 30-g fire assay with a gravimetric finish (ALS code Ag-GRA21).

11.2.5 Paramount 2016–2019

Samples from Paramount's drilling programs in 2016 through 2019 were transported by Paramount personnel from the drill sites to the Paramount storage and logging facility in Vale. The procedures used by Calico in 2011 and 2012 for sample handling, drying, logging, sample marking, core cutting, and packaging (see Section 11.1.4) were applied by Paramount to the core and RC samples from 2016 through 2019, with the exception of the two geotechnical core holes drilled in 2019 that, at the Report effective date, remain unsampled. Competent core was cut into halves with a saw, while highly broken core was split by hand directly from the box using a brush and spoon in an effort to take a

representative half-core sample; approximately 10% of the core samples were split by hand. After logging and sampling by Paramount geologists and technicians, core samples were transported by ALS personnel from the project office in Vale, to the ALS sample preparation facility in Reno or Elko, Nevada. Chain of custody paperwork was completed by Paramount and by ALS. Sample security was maintained at all times by Paramount and ALS. ALS is a commercial assayer independent from Paramount. ALS maintains an ISO 9001:2008 accreditation for quality management and ISO/IEC17025:2005 accreditation for gold assay methods.

ALS crushed the samples to 75% passing a 6-millimeter mesh and then split off 250-g subsamples for pulverization to 85% passing $<75 \mu\text{m}$ (200 mesh). Cleaner sand was run through the crusher every 5 samples or at any color change in the sample noticed by ALS technicians. Cleaner sand was pulverized between every sample in the pulverizing step. Pulps were split to separate a 30-g aliquot for determining gold by fire assay with AA finish (ALS code Au-AA23). A separate 5-g aliquot was used for ICP-AES determination of silver and 32 major, minor, and trace elements following a four-acid digestion (ALS code ME-ICP61). Further aliquots were taken from the same pulp for fire assay with gravimetric finish (ALS code Au-GRA21) if the original gold assay exceeded the 10.0 g/t Au upper limit of detection. Samples that assayed greater than 100 g/t Ag were reanalyzed using a 10-g aliquot with a four-acid digestion for silver and an AA finish (ALS code AG-OG62). Samples that assayed greater than 1,500 g/t Ag were reanalyzed using a 30-g fire assay with a gravimetric finish (ALS code Ag-GRA21)

11.3 Quality Assurance/Quality Control Procedures

11.3.1 Atlas QA/QC 1987–1992

Atlas employed two primary procedures for QA/QC:

- Random re-sampling of coarse-reject material for samples where the initial assay was in excess of approximately 0.020 oz/ton Au;
- Analyses of RC rig duplicates of original 5-ft samples collected at even 100-ft intervals.

Periodically, Atlas geologists prepared a list of the initial Chemex assays greater than approximately 0.020 oz/ton Au. For every 10th sample from that list, coarse rejects were collected and split into two 1-lb subsamples. These coarse-reject subsamples were sent to Cone Geochemical Laboratories (Cone) in Denver, Colorado and Hunter Mining Laboratories (Hunter) in Reno, Nevada. Cone and Hunter were independent of Atlas, but it is not known if these laboratories held certifications at that time. The check samples sent to both laboratories were reportedly prepared using the same procedures. The samples were dried, cone crushed to minus 1/8 inch, and split into 125-g subsamples that were then ring pulverized to minus 150 mesh. From these pulps, 30-g aliquots were analyzed by fire assay methods. The duplicate samples that were collected at 200-ft down-hole intervals were sent along with the initial samples to the Chemex facility in Boise, and then to the Chemex assay laboratory in North Vancouver. Hunter assay certificates indicate that their fire assays were finished gravimetrically, while the finish of the Cone assays was not indicated on the available certificate documentation.

The rig duplicates were sent to Chemex along with the original drill samples for preparation and analysis.

11.3.2 Newmont QA/QC 1992–1996

Newmont sent 163 check samples to their in-house Newmont Metallurgical Services laboratory in Salt Lake City, Utah for fire assays with AA finishes. The nature of these samples (e.g., pulps, preparation duplicates, or field duplicates) is not known. The original samples were assayed by RMGC.

Text from an original Newmont report or memorandum that lacks the header page describes the testing of drill core from hole GMC-001-9, which was a wedge off of GMC-001. The core was entirely consumed by the testing of 3 splits that included both halves of the sawed core as two sample sets, as well as samples of the fines derived from sawing of the core that would not normally be sampled.

Newmont requested RMGC to reanalyze 98 samples originally analyzed by RMGC; the nature of these check samples is not known for certain, but evidence suggests they were preparation duplicates.

11.3.3 Tombstone QA/QC 1998

Tombstone sent the following samples to Chemex for check analyses: 14 AAL pulps for pulp-check analyses, fifteen 2-pound splits of AAL coarse rejects as preparation duplicates, 14 core duplicates, and 15 RC rig duplicates. The RC rig duplicates were originally collected at approximately even 100-ft intervals.

The mesh sizes of the 14 AAL pulps were checked by Chemex prior to analyses. The RC and core duplicates were dried at 100°C and crushed to 65% at less than 10 mesh. These coarse-crush samples, along with the preparation duplicates, were split into 200–300-g subsamples using a Jones riffle splitter, and these subsamples were then ring-pulverized to 95% passing 150 mesh, from which 30-g aliquots were fire assayed for gold and silver using gravimetric finishes.

In addition to the QA/QC testing described above, Tombstone selected 60 AAL coarse rejects from storage and instructed AAL to coarse pulverize the entire sample to minus 60 mesh. AAL split the samples into halves with a rotary splitter, sent one set of the halved samples to Chemex for further sample preparation (pulverization to 95% passing 150 mesh) and analysis (30-g fire assay with AA finish), and completed the same preparation and analysis at AAL using the second set of halved samples. Tombstone referred to these samples as “Assay Prep Checks”, while calling the more standard preparation duplicates described in the previous paragraph “Reject Checks”.

AAL also routinely completed replicate analyses of AAL original pulps.

11.3.4 Calico QA/QC 2011–2012

Calico inserted QA/QC samples every 10th sample in sequence using pre-labeled bags in the same manner as the primary core and RC-chip samples. Drill samples were grouped in batches of 36 samples. Each sample batch contained a field duplicate, a commercially prepared certified reference material (CRM), and a blank. The blanks included commercial blank pulps and coarse basalt rock barren of gold (coarse blanks). All four types of control samples were inserted with the drill core; only the CRMs and blank pulps were inserted with the RC samples.

The basalt rock was used to monitor the possibility of contamination potentially introduced during the coarse-crushing and pulverization processes used for drill core. The blank pulps monitored possible contamination that might be introduced after pulverization.

Three commercial CRMs obtained from CDN Resource Laboratories Ltd. (CDN) were inserted to assess the precision and accuracy of the analyses. These are listed in Table 11-1.

Table 11-1: Grassy Mountain Certified Reference Materials for 2011–2012

CRMID	Certified Value (g/t Au)	2 Std. Dev. (g/t Au)	Submitted No.
CDNGS-P3A	0.338	0.022	55
CD-GS-3J	2.71	0.26	36
CD-GS-8A	8.25	0.60	21

At the request of Calico, a preparation-duplicate sample was created approximately every 20 samples to assess the homogeneity of the sample material and the overall sample variance. During the 2011 drilling program, 59 sample pulps representing about 5% of the samples from the higher-grade portion of the deposit were also retrieved from ALS and shipped to AAL as check samples.

11.3.5 Paramount QA/QC 2016–2019

Paramount compiled an electronic database containing all historical and 2016–2019 drilling information. This database was maintained using SQL software and housed by an off-site remote server that is controlled by a third-party database expert. All database inquiries and data requests were routed through this third-party expert. All data were controlled by Paramount’s designated data manager and the third-party expert in order to prevent any unauthorized changes to the Paramount database. Paramount established QA/QC protocols for data management, verification, validation, and data screening. These protocols consisted of primary and secondary checks on electronic entry of field data, drill-hole data, sample information, assays, and geochemistry. All information was verified and cross checked by Paramount and the third-party database expert to ensure accuracy.

During the 2016–2019 drilling programs, nine different commercially-prepared CRMs obtained from CDN were inserted into the sample sequence for the purpose of QA/QC (Table 11-2).

Table 11-2: Grassy Mountain Certified Reference Materials

CRM ID	Certified Value (g/t Au)	2 Std. Dev. (g/t Au)	Certified Value (g/t Ag)	2 Std. Dev. (g/t Ag)	No. Submitted
CDN-GS-P3A	0.338	0.022		31	30
CDN-GS-P3C	0.263	0.02			26
CDN-GS-P4F	0.498	0.028			22
CDN-GS-P7E	0.766	0.086			28
CDN-GS-1Q	1.24	0.08	40.7	2.2	32
CDN-GS-3J	2.71	0.26			57
CDN-GS-8A	8.25	0.60			27
CDN-GS-10D	9.50	0.56			12
CDN-ME-1414	0.284	0.026	18.2	1.2	36

To meet Paramount’s QA/QC protocols, the standards needed to assay within three standard deviations of the recommended gold value furnished from CDN. One of the CRMs had certified silver values. If any sample values were outside the three standard-deviation limit, the sample previous to and after the failed sample were examined for accuracy and for cohesiveness with the geology and mineralization. Any failures and surrounding samples that were thought out of the ordinary after this examination were re-assayed.

A white marble chip blank sample was variously inserted for both core and RC samples. If any blank samples assayed above a 0.10 g/t Au limit, the sample previous to and after the failed sample were examined for possible contamination sources. Any failures and surrounding samples that were thought out of the ordinary after this examination were re-assayed.

RC rig-duplicate samples were collected at the drill rig.

Paramount also instructed ALS to prepare and analyze preparation duplicates for all drill holes, while field duplicates were submitted with the original samples for all core holes. Finally, a subset of ALS pulps from RC and core samples were sent to AAL for check assays.

11.4 Quality Assurance/Quality Control Results

11.4.1 Atlas 1987–1992

Atlas made extensive use of preparation duplicates and field duplicates in an effort to verify their drill-hole gold results. The field duplicates were analyzed by Chemex, the primary assay laboratory used by Atlas, while the preparation duplicates were sent to Cone and Hunter.

11.4.1.1 Preparation Duplicates.


Preparation duplicates are analyses of pulps derived from secondary splits of the coarsely ground material (coarse rejects) that remain after the primary split is taken for the original assay. Preparation duplicates are therefore used to evaluate the variability introduced by subsampling of the coarsely crushed material. Ideally, preparation duplicates are analyzed by the primary analytical laboratory in order to remove variability introduced by techniques employed by a second laboratory. In this case, however, Atlas sent the preparation duplicates to two secondary laboratories.

MDA compiled the data for 458 preparation duplicates derived from coarse rejects of samples from 89 Atlas drill holes that were analyzed by Cone. The relative-difference (RD) graph in Figure 11-1 shows the percentage difference (plotted on the y-axis) of each Cone preparation-duplicate assay relative to its paired primary-sample analysis by Chemex. This RD is calculated as follows:

$$100 \times \frac{(\text{duplicate} - \text{original})}{\text{lesser of } (\text{duplicate}, \text{original})}$$

The x-axis of the graph plots the means of the gold values of the paired data (the mean of the pairs, or MOP) in a sequential but non-linear fashion. The red line shows the moving average of the RDs of the pairs, thereby providing a visual guide to trends in the data that aids in the identification of potential bias. Positive RD values indicate that the duplicate-sample analysis is greater than the primary-sample assay. A total of 17 pairs characterized by unrepresentatively high RDs are excluded from Figure 11-1.

Figure 11-1: Cone Analyses of Preparation Duplicates Relative to Original Chemex Gold Assays

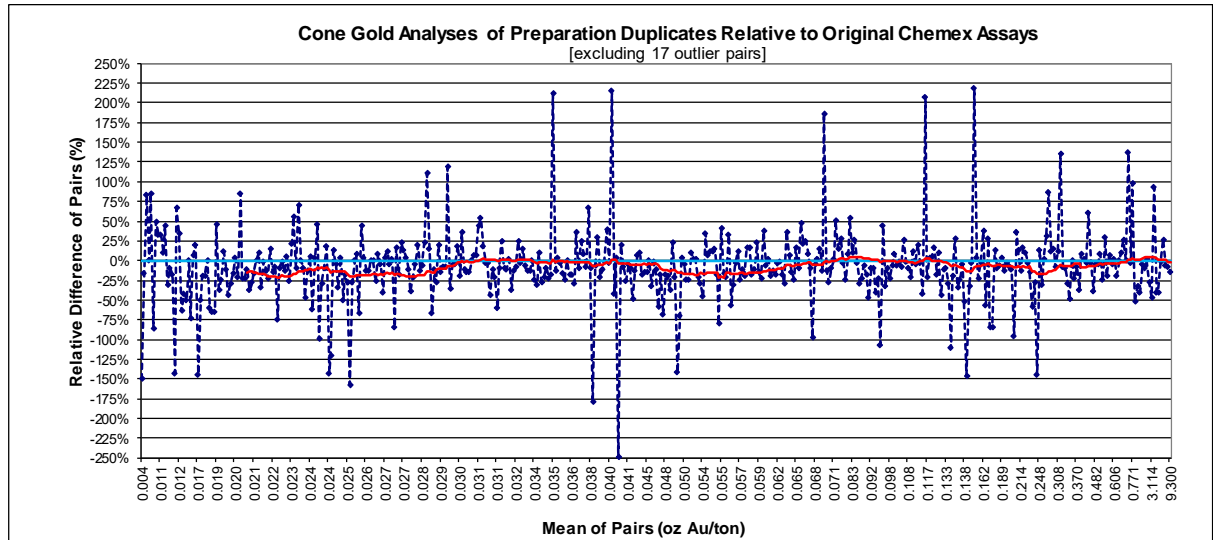


Note: Figure prepared by MDA, 2018.

The graph suggests a low bias in the Cone gold results relative to the original Chemex assays over significant portions of the grade range of the data. The mean of Cone analyses (0.226 oz/ton Au) is lower than that of the original results (0.237 oz/ton Au), and the average RD of the pairs is -7% (the average RD can be an approximate measure of the degree of bias, although one must be aware of the statistical effects of pairs with anomalously high RDs). The mean of the absolute value of the RDs (AVRD) is 29%, which is a measure of the average variability exhibited by the paired data.

Hunter analyzed 428 preparation duplicates from the same original-sample set as analyzed by Cone (Figure 11-2).

Figure 11-2: Hunter Analyses of Preparation Duplicates Relative to Original Chemex Gold Assays

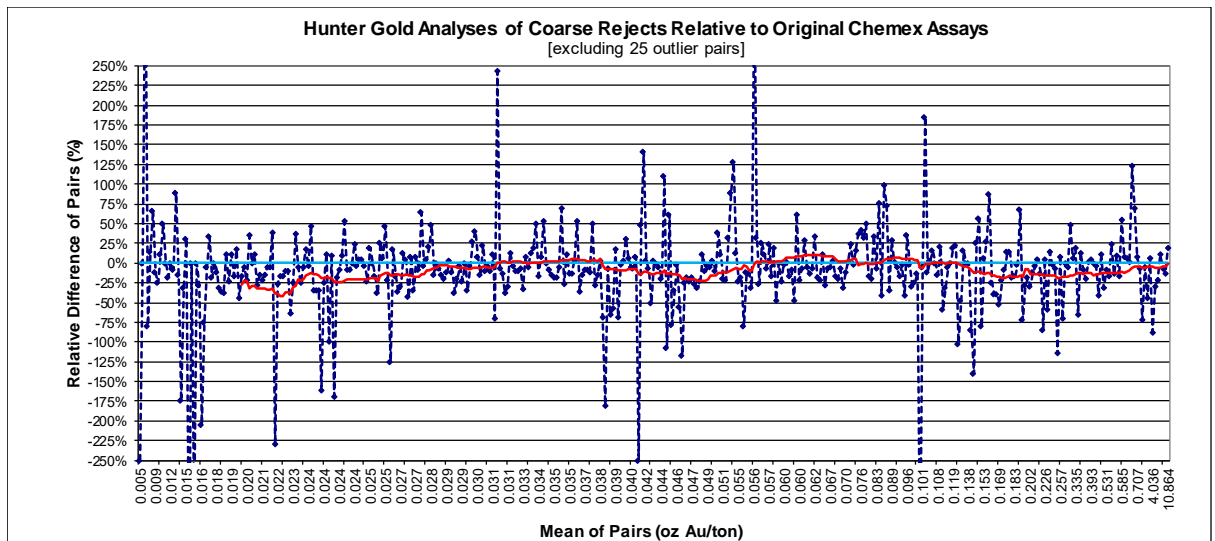

Note: Figure prepared by MDA, 2018.


In this case, 25 extreme outlier pairs are removed for the purposes of this discussion. The mean of the Hunter analyses is lower than the mean of the original Chemex assays (0.208 vs. 0.221 oz/ton Au), and the average of the RDs is -9%. The AVRDR is 34%.

The Hunter and Cone preparation-duplicate data are generally consistent, showing a low bias in the gold results relative to the original Chemex analyses and average variability of approximately 30%. One difference in the duplicate versus original analyses is that the Chemex pulps were prepared to meet a 95% minus 100-mesh particle size, and the Hunter and Cone pulps were pulverized to minus 150 mesh.

11.4.1.2 RC Field Duplicates

Field duplicates are secondary splits of drill samples that are mainly used to assess the natural grade variability of the deposit, as well as to evaluate the total subsampling variances attributable to splitting both in the field and in all subsequent subsampling steps in the laboratory. The Atlas field duplicates were collected simultaneously as the original samples at the RC drill sites and sent to Chemex together with the original samples. The results of 1,252 RC duplicates from 165 holes drilled by Atlas were compiled by MDA (Figure 11-3; 38 pairs in which both the original and field-duplicate analyses are less than the detection limit are removed, as are 14 extreme outlier pairs).

Figure 11-3: Chemex Analyses of RC Field Duplicates Relative to Original Chemex Gold Assays

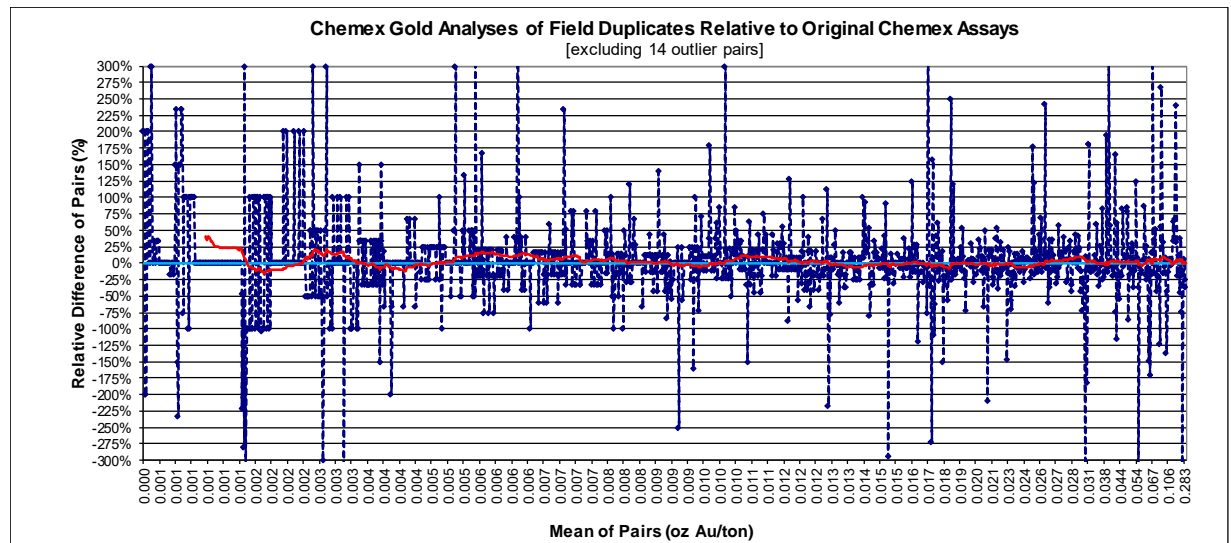


Note: Figure prepared by MDA, 2018.

The field duplicates compare well with the original results, and the means of the datasets are identical (0.016 oz/ton Au). The average of the RD is +4%, while the mean of the AVRDR is 35%.

11.4.1.3 Miscellaneous QA/QC Samples

In addition to the preparation and field duplicates, Atlas sent 32 samples of unknown type (e.g., sample pulps, coarse rejects, or field duplicates) in 1990 from drill hole 026-034 to Shasta Analytical Geochemistry Laboratory of Redding, California (Shasta) for 30-g fire assays. It is not known if Shasta had formal accreditation at the time of the Atlas assays. A handwritten note on the paper assay certificate states that these samples consist of a "set of 4th check assays from [this] hole". The Shasta check assays are compared to the original Chemex results in Figure 11-4; one outlier pair and two pairs in which Chemex overlimit assays were not performed are removed from the graph.

Figure 11-4: Shasta Check Analyses Relative to Original Chemex Gold Assays

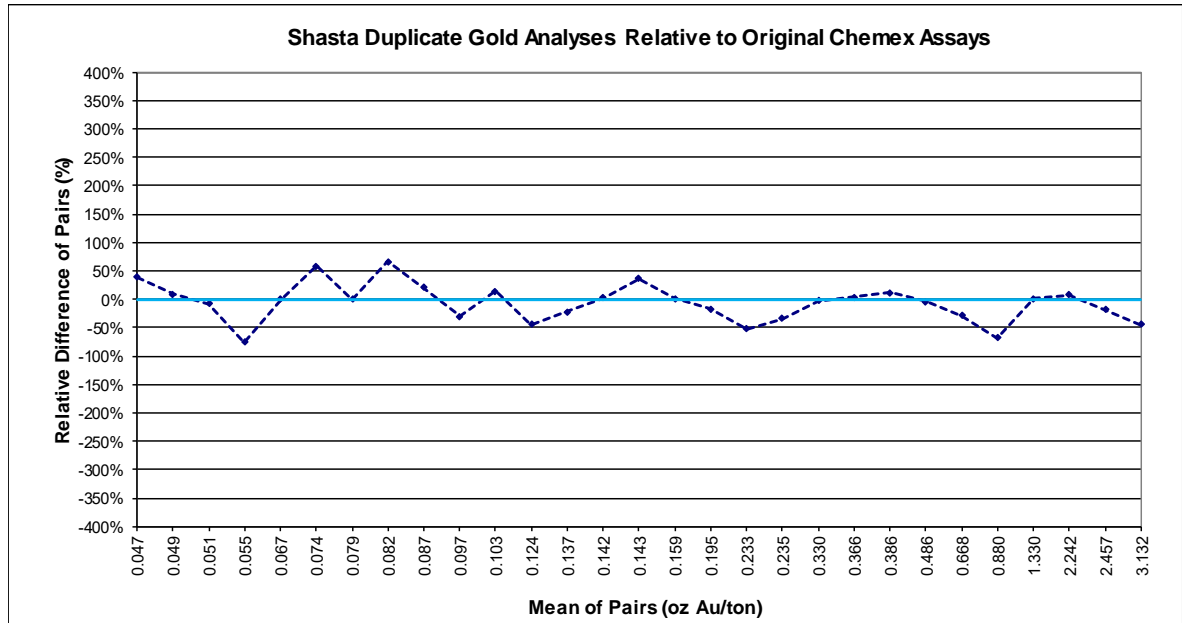

Note: Figure prepared by MDA, 2018.

The paired data compare reasonably well up to a MOP grade of ~0.2 oz/ton Au. At higher grades, the Shasta check assays tend to be lower grade than the Chemex original analyses, although there are far too few pairs to make definitive conclusions. The mean of the Shasta analyses (0.462 oz/ton Au) is significantly lower than the mean of the original Chemex assays (0.533 oz/ton Au), but this difference is largely due to the two highest-grade pairs.

In May 1988, Tombstone sent 12 high-grade Chemex pulps from eight Atlas drill holes to AAL for check assaying; 1 of the pulps did not have the 30 g needed for the one-assay-ton (30 g) gravimetric fire assays. The mean of the 11 check assays (3.835 oz/ton Au) agrees well with the mean of the original Chemex results (3.866 oz/ton Au).


In late 1990, Phelps Dodge Mining Company had four pulps and 27 coarse-reject samples from 9 Atlas holes sent to Chemex for assaying. Backup information is not adequate to determine which of the check assays are from pulps versus the coarse rejects. The paired data compare well up to a MOP of approximately 0.14 oz/ton Au; the check assays in the seven pairs at higher grades are on average lower-grade than the original results, but again the quantity of data is insufficient to derive statistically valid conclusions.

11.4.2 Newmont 1992–1996

11.4.2.1 Preparation Duplicates

In 1993, Newmont had RMGC reanalyze 98 samples originally analyzed by RMGC; five of the samples did not have sufficient material to assay. The nature of these check samples is uncertain, but the assay certificate includes “REMARKS” that state, “To report Original Pulp and New Pulp values for Gold fire and Cyanide”. This suggests the samples were preparation duplicates. The check results are compared to the originals in Figure 11-5; six outlier pairs are excluded.

Figure 11-5: RMGC Check Analyses Relative to Original RMGC Gold Assays

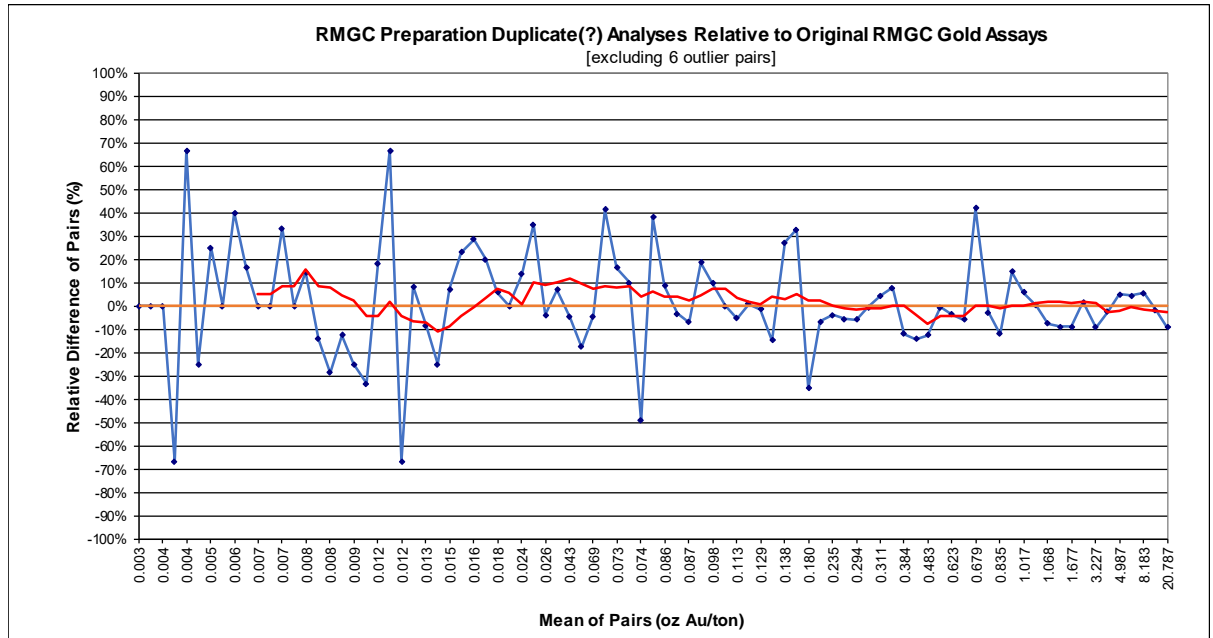


Note: Figure prepared by MDA, 2018.

The duplicates and originals compare reasonably well, and the mean of the checks (0.903 oz/ton Au) is close to the original (0.923 oz/ton Au). The mean of the RD is +2%, while the mean of the AVRDR is 15%.

11.4.2.2 Core Field Duplicates

Newmont drill hole GMC-001-9 was wedged off GMC-001. Newmont submitted both halves of the sawed core from the wedge hole for analyses by RMGC. Newmont's split "A" is presumed to be the original sample in the following analysis and split "B" is therefore considered to be a core duplicate sample. The two sets of 73 core samples were sent to RMGC for sample preparation and fire assaying in July 1993. Figure 11-6 is a RD plot of the data, excluding two pairs that did not have sufficient material to analyze and five outlier pairs.

Figure 11-6: RMGC Core Duplicate “B” Relative to RMGC “A” Gold Assays

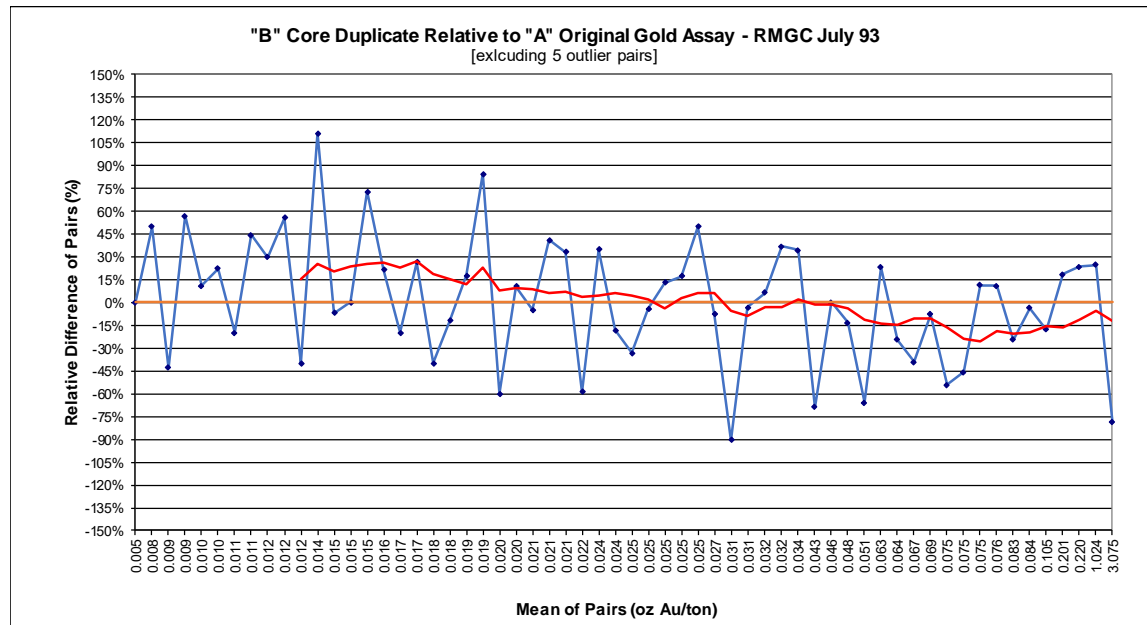

Note: Figure prepared by MDA, 2018.

The core duplicate values are higher than the originals up to a MOP grade of approximately 0.020 oz/ton Au, then lower than the original at MOP grades of about 0.040 oz/ton Au and higher. The means of the core duplicates and originals are 0.085 and 0.108 oz/ton Au, respectively, but if the highest-grade pair is removed the duplicate mean becomes higher than the original (0.052 and 0.049 oz/ton Au, respectively). The mean of the RD is +2%, while the mean of the AVRDR is 30%.

The preparation-duplicate data and core-duplicate data do not identify any significant issues. The two datasets taken together suggest the variability attributable to the splitting of core into halves is approximately 15% (core-duplicate AVRDR of 30% minus preparation-duplicate AVRDR of 15%).

11.4.2.3 Miscellaneous QA/QC Samples

In December 1993, Newmont had the “A” and “B” pulps reanalyzed by RMGC. These pulp-check analyses for both datasets yielded results extremely close to the original November 1993 assays, with means of RDs of 0% and 1% for the A and B pulp sets, respectively, and AVRDRs of 2% in both cases.

Newmont completed gold fire assays on 163 samples at their in-house metallurgical assay facility in Salt Lake City, Utah as a check on the RMGC results (Jory, 1993). The nature of the check samples (pulps, coarse rejects, or field duplicates) is not known. The mean (0.970 oz/ton Au) and median (0.080 oz/ton Au) of the Newmont checks, as reported by Jory, are both slightly higher than the original RMGC mean (0.942 oz/ton Au) and median (0.078 oz/ton Au).

In addition to Newmont’s sampling and analytical verification programs discussed above, Tombstone sent nine high-grade samples of Newmont “drill cuttings” from seven drill holes to AAL for preparation and 30-g gravimetric fire assays in April 1998. The AAL analyses had a mean of 11.209 oz/ton Au, which compares well with the mean of 11.25 oz/ton Au from RMGC’s original assays.

11.4.3 Tombstone 1998


11.4.3.1 Replicate Analyses

AAL, Tombstone’s primary assay laboratory, routinely completed replicate analyses of some of the original assays. Replicate analyses use a second aliquot taken from the primary sample pulp and are typically reported on the same certificate as the original assays. A total of 113 of these analyses were reported by AAL on the same certificates that report the original assays for the 10 holes drilled by Tombstone. The replicate analyses show excellent reproducibility of the original assays, with a mean that is almost identical to the original and an average RD of +1%. The mean of the AVR is 6%, which is somewhat high for replicate analyses.

11.4.3.2 Preparation Duplicates

A total of 60 AAL coarse rejects from two drill holes were crushed to minus 60 mesh by AAL and split into halves. One of the halves was pulverized and analyzed by AAL and the second set was sent to Chemex to do the same. The results of this modified version of preparation duplicates completed by AAL are shown in Figure 11-7.

Figure 11-7: AAL Preparation Duplicate Analyses Relative to AAL Original Gold Assays

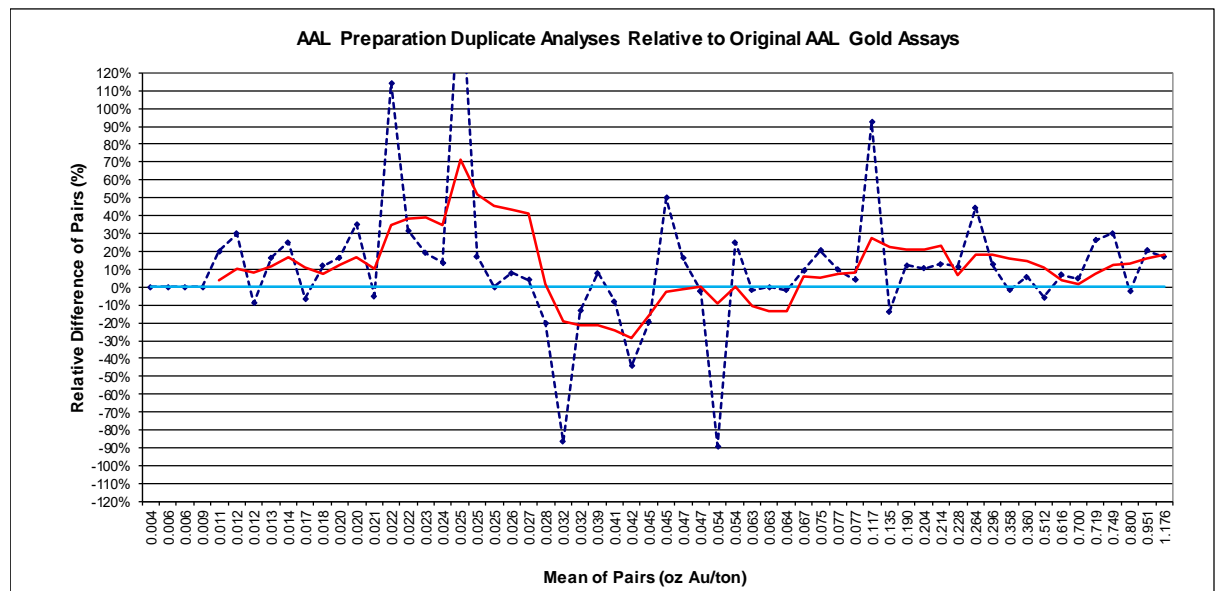

Note: Figure prepared by MDA, 2018.

The RD graph shows high biases at low and high grades, while a low bias is evident at MOP grades between approximately 0.025 and 0.06 oz/ton Au. The duplicate mean is higher than that of the original samples (0.175 vs. 0.157 oz/ton Au), and the mean of the RDs is +11%.

A RD graph of the Chemex analyses versus the original AAL results shows a roughly similar form as seen in Figure 11-7, although no bias is present. In this case the duplicate mean (0.159 oz/ton Au) matches the original mean well, and the mean of the RDs is +1%. The means of the AVR is 20%.

The differences between the AAL and Chemex results is likely more a reflection of insufficient data to adequately evaluate the Tombstone preparation duplicates than some internal differences between the two laboratories.

11.4.3.3 Miscellaneous QA/QC Samples

Tombstone sent Chemex a set of original AAL pulps for pulp-check analyses, splits of AAL coarse-rejects as preparation duplicates, and some core and RC field duplicates. The mean of 14 pulp-check analyses from three drill holes (0.523 oz/ton Au) is about 5% higher than that of the original AAL analyses (0.499 oz/ton Au). The mean of 15 Chemex preparation duplicates from six drill holes is also higher than the AAL mean (0.447 vs. 0.412 oz/ton Au, respectively). A total of 13 core duplicates from four drill holes yielded a mean (0.119 oz/ton Au) much higher than the original analyses (mean of 0.085 oz/ton Au), but the elimination of 1 extreme pair (0.414 oz/ton Au for the duplicate vs. 0.080 oz/ton Au for the original) brings the duplicate mean (0.094 oz/ton Au) much closer to the mean of the original samples (0.086 oz/ton Au). The mean of 15 RC duplicates from six drill holes is again higher than the mean of the original samples (0.055 vs. 0.048 oz/ton Au, respectively).

While none of this miscellaneous testwork involves sufficient samples to derive statistically significant conclusions, the check analyses of the various sample sets are consistently higher than the original AAL results.


11.4.4 Calico 2011–2012

11.4.4.1 CRMs

Three sets of CRMs were used to evaluate the analytical accuracy and precision of the original ALS analyses of Calico’s drill samples. The CRMs were inserted into the original sample stream and analyzed with the drill samples. In the case of normally distributed data, 95% of the CRM analyses are expected to lie within the two standard-deviation limits of the certified value, while only 0.3% of the analyses are expected to lie outside of the three standard-deviation limits. Note, however, that most assay datasets from metal deposits are positively skewed.

Figure 11-8 shows a plot of the ALS analyses of CRM CDN-GS-3J, which has a certified value of 2.71 g/t Au (0.079 oz/ton Au). The x-axis plots the certificate numbers by increasing dates.

Figure 11-8: Chart of ALS Analyses of CRM CDN-GS-3J

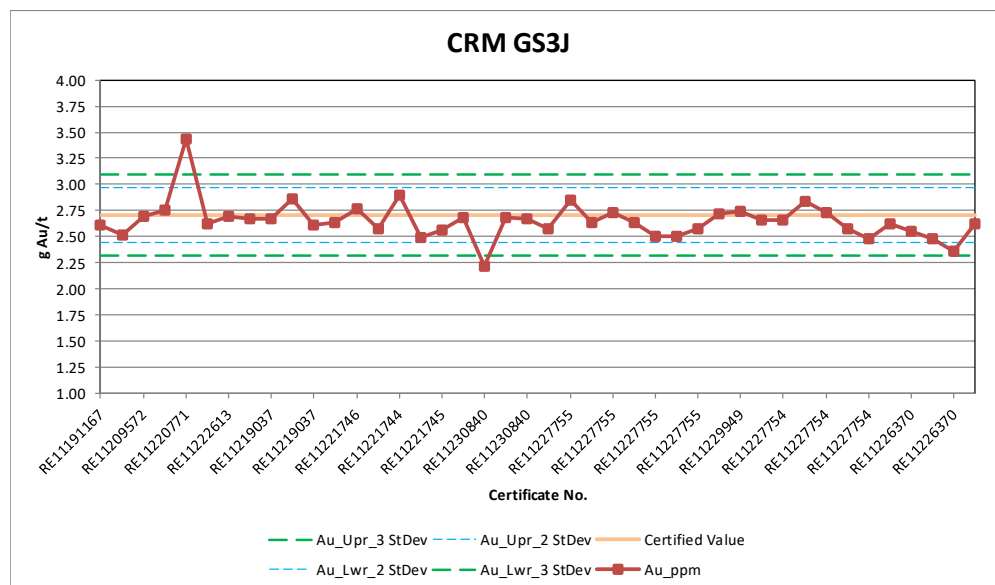

Note: Figure prepared by MDA, 2018.

Samples outside of the three standard-deviation limits are typically considered to be failures. As it is statistically unlikely that two consecutive analyses of standards would lie between the two and three standard-deviation limits, such samples are also considered to be failures unless further investigations suggest otherwise. All potential failures should trigger investigation, possible laboratory notification of potential problems, and possible reanalyses of all samples included with the failed standard result.

Using the above criteria, two of the ALS analyses of this CRM are three standard-deviation failures. However, the CRM analyses are biased slightly low of the certified value and the low-side failure would not be a failure if the low bias is taken into account.

A similar analysis of the CRM CDN-GS-8, which has a certified value of 8.25 g/t Au (0.241 oz/ton Au) shows no bias and no failures, while CDN-GS-P3A has 12 failures out of the 56 ALS analyses. Although nine of the CDN-GS-P3A failures are on the high side (ALS value > certified value), no bias is evident in the data taken as a whole. CDN-GS-8A has a certified value of 0.338 g/t Au (0.010 oz/ton Au).


It is not known what actions, if any, were taken in response to the CRM failures.

11.4.4.2 Coarse Blanks

Coarse blanks are samples of barren material that are used to detect possible contamination in the laboratory, which is most common during sample preparation stages. In order for analyses of blanks to be meaningful, they must be sufficiently coarse to require the same crushing and pulverizing stages as the drill samples. It is also important for a significant number of the blanks to be placed in the sample stream within, or immediately following, a set of mineralized samples, which would be the source of most contamination issues. In practice, this is much easier to accomplish with core samples than RC. Blank results that are greater than five times the lower detection limit of the relevant analyses are typically considered failures that require further investigation and possible re-assaying of associated drill samples. The detection limit of the ALS analyses was 0.005 g/t Au, so blank samples assaying in excess of 0.025 g/t Au (0.0007 oz/ton Au) are considered to be failures.

A total of 18 coarse blanks were analyzed in 2011–2012 by ALS (Figure 11-9).

Figure 11-9: Chart of ALS Analyses of Coarse Blanks - Calico

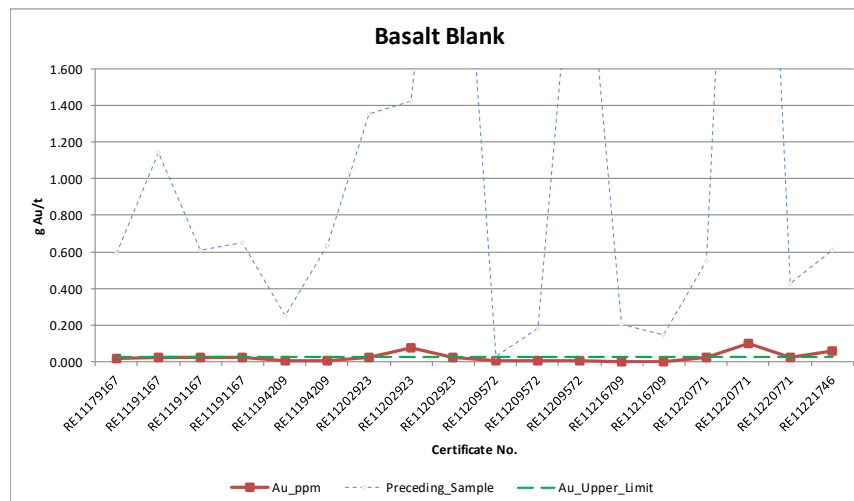

Note: Figure prepared by MDA, 2018.

Three of the analyses exceeded the failure threshold, and the highest analysis of the blanks is 0.100 g/t Au (0.003 oz/ton Au). All three of the failures are associated with previous samples that are significantly mineralized. While the blank data provide evidence of cross contamination during ALS sample preparation, the magnitude of this contamination is insignificant.

11.4.4.3 Analytical Blanks

Analytical blanks are used to monitor possible contamination or calibration problems during the determination of gold concentrations. Calico used a blank commercial pulp supplied by CDN Laboratories (CDN-BL-7) for the QA/QC program. There are 62 ALS analyses of the analytical blank, and 5 of the analyses exceeded the 0.025 g/t Au (0.0007 oz/ton Au) threshold. The failures range from 0.001, 0.001, 0.003, 0.004, and 0.009 oz/ton Au. It is not common for analytical blanks to generate failures, and the latter three failures are at a level that would warrant investigation and potentially corrective action; it is not known if any actions were taken.

11.4.4.4 Field Duplicates

Calico collected 40 RC duplicates and 10 core duplicates that were analyzed by the primary laboratory (ALS). The mean of the RC duplicates (0.030 oz/ton Au) is close to the mean of the original assays (0.032 oz/ton Au). Although the average of the RDs is -9%, the removal of two of the higher-grade pairs with anomalously high RDs changes this average to 4%. The mean of the AVRDR of the entire dataset is 21%.

The means of the duplicates and original samples are reasonably close (0.043 and 0.040 oz/ton Au, respectively) considering the lack of pairs, but the size of the core-duplicate dataset is too small to derive meaningful conclusions.

11.4.4.5 Pulp-Checks

Pulp checks are reanalyses of the remaining pulps from the original assays. These reanalyses are typically completed by a second laboratory. A total of 59 ALS original sample pulps from Calico's drilling program were sent to AAL for check assays. Excluding one extreme outlier pair, the mean of the AAL checks compare very well with the mean of the original samples (0.206 versus 0.208 oz/ton Au, respectively), and the average of the RDs is -2%. The mean of the AVRDR is 12%, which is relatively high for pulp-check analyses.

11.4.5 Paramount 2016–2017

11.4.5.1 Certified Reference Materials.


Paramount inserted the nine sets of certified CRMs listed in Table 11-2 into the RC and core sample stream.

Out of the 270 ALS gold assays of the CRMs, there were a total of nine analyses that exceeded the three standard-deviation limits. Four of these are due to slight high biases in the ALS analyses of GS-P3A and GS-P3C. Of the remaining five cases that can be considered failures, three are from analyses of GS-P4F, although each of these are only slightly above the high-side failure limits.

11.4.5.2 Pulp Checks

Paramount sent 569 ALS pulps from the 2016–2017 drilling program to AAL for pulp-check analyses (Figure 11-10; 11 outlier pairs are excluded).

Figure 11-10: AAL Pulp Checks of ALS Original Gold Analyses

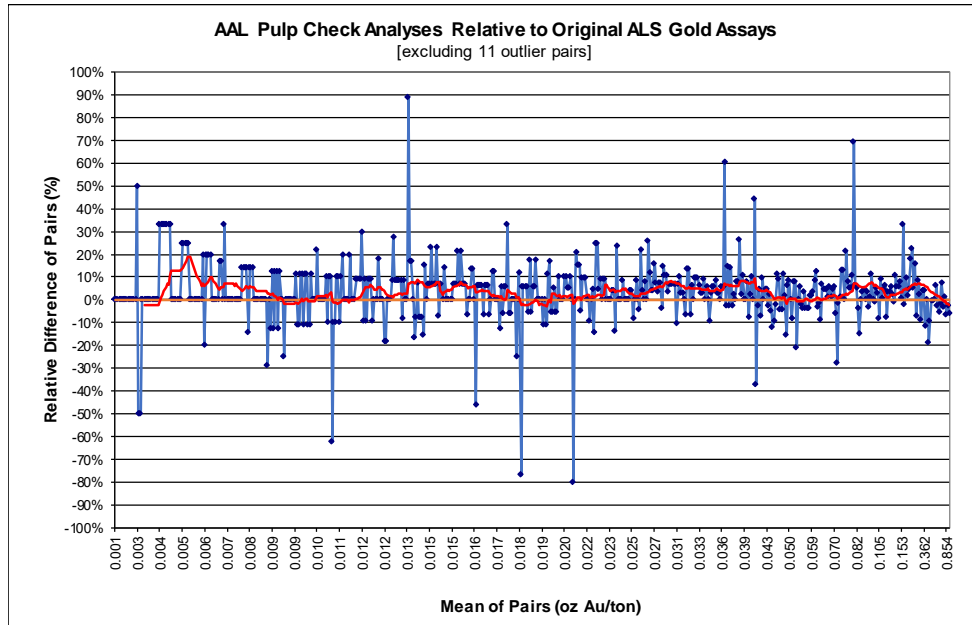

Note: Figure prepared by MDA, 2018.


While the means of the duplicate and original analyses are identical (0.066 oz/ton Au), the graph provides evidence of a slight high bias in the AAL check assays and the mean of the RDs is +3%. The mean of the AVRDR is 8%.

A high bias in the AAL results compared to the original ALS assays is apparent in the silver data as well. The mean of the AAL analyses is 4% higher than the ALS mean, the average of the RDs is +6%, and the mean of the AVRDR is 10%.

11.4.5.3 Coarse Blanks

A total of 151 coarse-blanks were analyzed by ALS (Figure 11-11), eight of which exceeded the failure threshold.

Figure 11-11: Chart of ALS Analyses of Coarse Blanks - Paramount

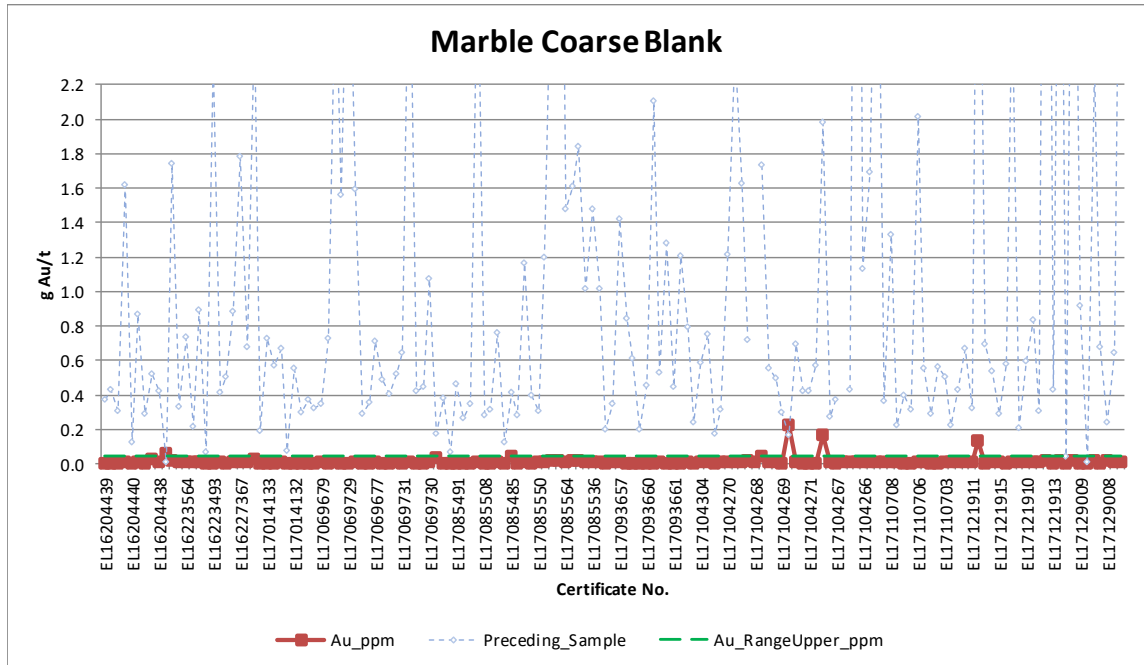


Note: Figure prepared by MDA, 2018.

The failures range from 0.029 to 0.221 g/t Au (0.001 to 0.007 oz/ton Au); three of the blank analyses exceeded 0.1 g/t Au (0.003 oz Au/t). The failures do not correlate well with previous samples that are significantly mineralized, but the data provide the suggestion of cross contamination during ALS sample preparation. The magnitude of this potential contamination in the three highest-grade blank analyses would warrant investigation and, if appropriate, re-assaying of samples that accompany the failures.

11.4.5.4 Preparation Duplicates

ALS prepared and analyzed a total of 153 preparation duplicates that were analyzed along with the original samples in 29 of the 30 holes drilled by Paramount (Figure 11-12; three outlier pairs were removed).

Figure 11-12: ALS Gold Analyses Preparation Duplicates - Paramount

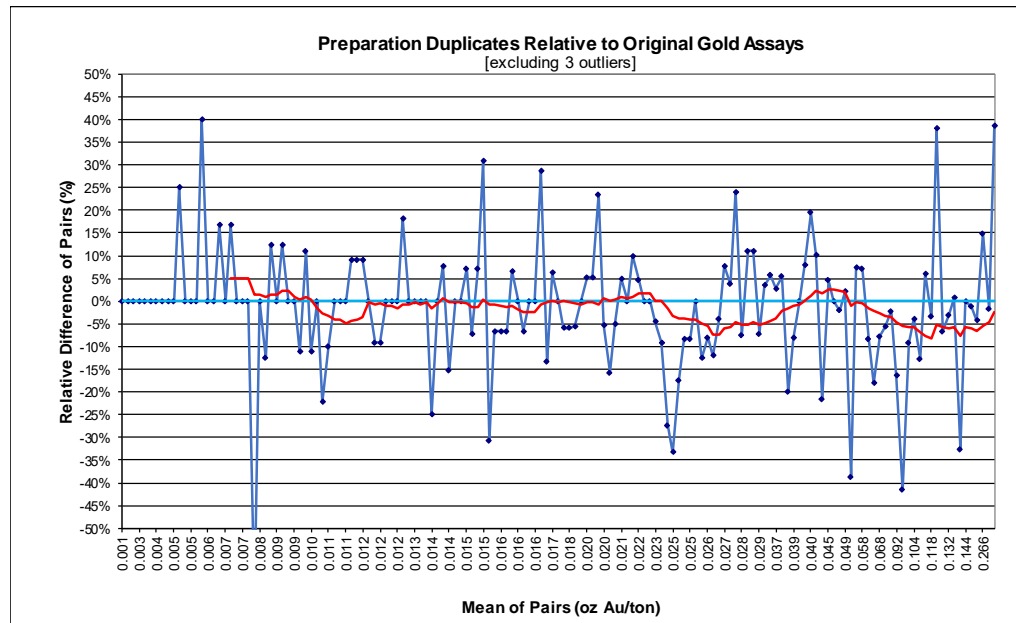

Note: Figure prepared by MDA, 2018.


The mean of the gold analyses of the preparation duplicates is very close to the mean of the original assays (0.040 versus 0.039 oz/ton Au, respectively), and the average of the RDs is -1%. The mean of the AVRDR is 9%. The silver results are very similar to those of gold, with means of the duplicate and original samples of 0.172 and 0.174 oz/ton Ag, respectively. The mean of the RDs is -1% and the average of the AVRDR of 9%.

11.4.5.5 Core Field Duplicates

Paramount regularly included RC and core field duplicates with the submission of the original core samples to ALS. The core duplicates consisted of half splits of the 1/2 core remaining, creating 1/4-core samples, from all 27 holes drilled at least in part with core. Fines, consisting of pieces of core too small for sawing, were sampled using a scoop and putty knife to obtain an 'eyeball' 1/2-split (this was identical to the procedure used for the primary 1/2-core samples). A total of 136 core duplicates and 52 RC duplicates were analyzed by ALS. The two datasets require separate evaluation because the splitting methodologies are completely different.

The 1/4-core duplicates are compared to the original results in Figure 11-13; five outlier pairs were removed.

Figure 11-13: Core Duplicates Relative to Original Gold Assays - Paramount

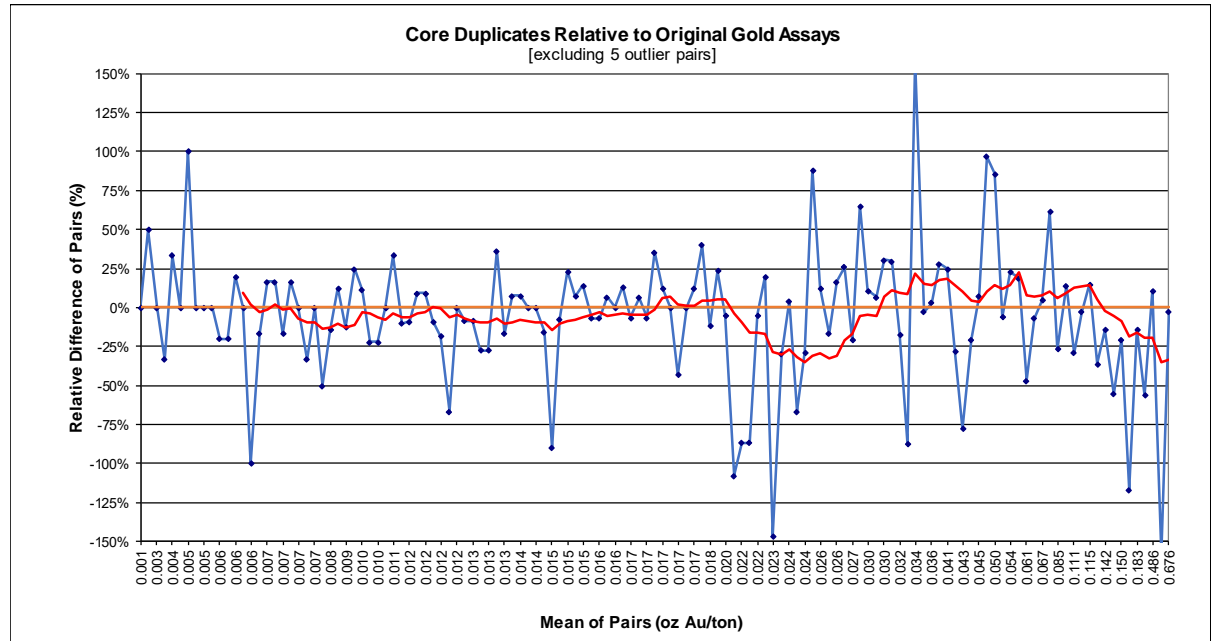


Note: Figure prepared by MDA, 2018.

At MOP of up to ~0.02 oz/ton Au, the means of the duplicate and original analyses are identical, although a slight low bias in the duplicate results is evident over much of this grade range. This bias is largely driven by spikes on the graph that are predominantly pairs where the duplicates are lower than the originals. At MOP higher than 0.02 oz/ton Au, variability increases dramatically (AVRD = 40% versus 18% over the lower-grade range) and the duplicate data display both high- and low-bias trends. On average, the duplicate data are lower grade than the original samples (means of duplicates and originals are 0.078 and 0.093 oz/ton Au, respectively, and the mean of the RDs is -16%).

Excluding seven outlier pairs, the silver results for the core duplicates compare well with the original results, with near identical means and an average RD of -1%. The mean of the silver AVRDR is 17%.

The core-duplicate gold results led to the submission of 59 additional core duplicates from 10 of the Paramount drill holes that include core. In this case, 1/2-core samples were submitted, and, with the first set of core duplicates and Newmont results regarding fines in mind (see Section 10.4.1), special care was taken to brush out all fines in the core boxes related to each sample interval and include them in the duplicate samples. The gold analyses of this second batch of core duplicates, excluding two outlier pairs, show excellent correspondence with the original 1/2-core results up to a MOP grade of ~0.02 oz/ton Au (Figure 11-14).

Figure 11-14: Second Set of Paramount Core Duplicates Relative to Original Gold Assays

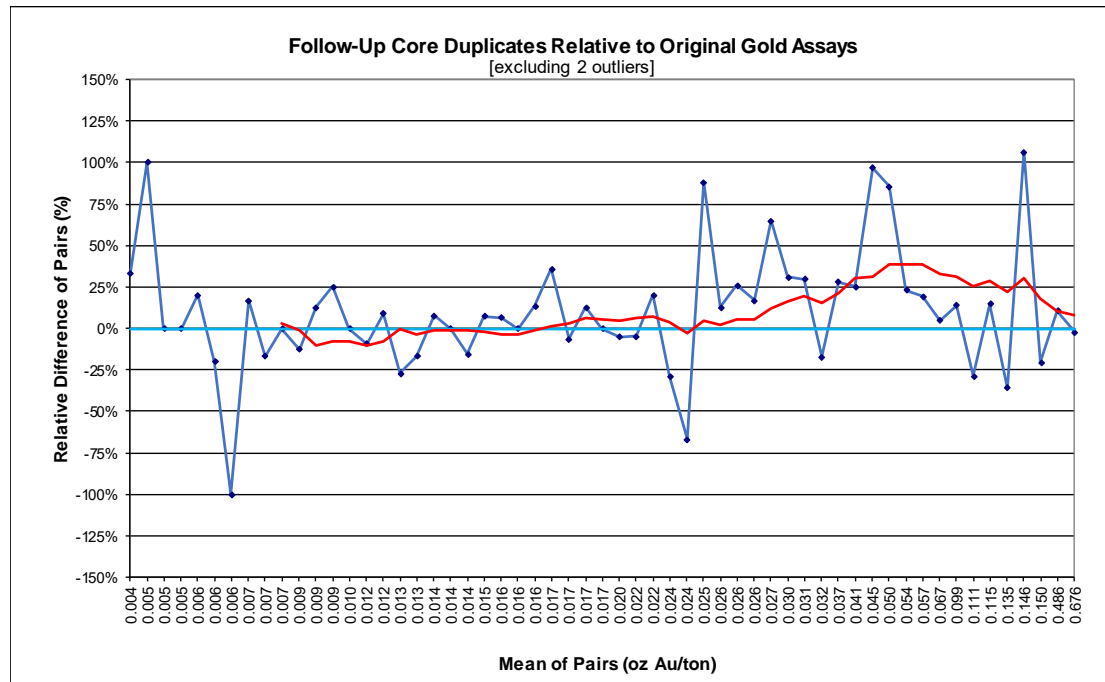

Note: Figure prepared by MDA, 2018.

At higher grades, the core duplicates are systematically higher grade (duplicate mean is 8% higher than the original mean; average of the RDs is +18%), and as was the case for the first set of core duplicates, variability increases substantially (mean of the AVR is 33%).


The silver values of the second set of duplicate core samples compare reasonably well with originals. The mean of the duplicates (0.167 oz/ton Ag) is close to the original mean (0.163 oz/ton Ag) considering the relatively small dataset, and the mean of the RDs is +3%. The average of the AVR is 18%.

It is reasonable to postulate from the core duplicate data that sampling of the core-box fines derived from higher-grade gold samples may have played a significant role in the core-duplicate gold and silver results. Specifically, native gold particles collecting at the bottoms of the boxes in high-grade samples may have been unrepresentatively lost to both the original half-core samples and the first set of ¼-core duplicates. This loss of native gold particles can be attributed to the manual, unsystematic splitting of the core-box fines (fines were sampled with a scoop and putty knife). In contrast, the second set of half-core duplicates likely oversampled gold in the higher-grade samples, as these samples would have incorporated the gold lost from the primary samples (all fines left in the core boxes were brushed into the duplicate sample bags). The possibility of free gold preferentially collecting in fines is supported by the results of Newmont analyses of saw fines (Section 10.4.1). In contrast to gold, silver analyses of both sets of core duplicates compare reasonably well with the original assays.

11.4.5.6 RC Field Duplicates

A total of 52 RC duplicates are available for 27 of the Paramount drill holes. Most of these drill holes were completed with core. Figure 11-15 compares the duplicate RC assays to the original results.

Figure 11-15: Paramount RC Duplicates Relative to Original Gold Analyses

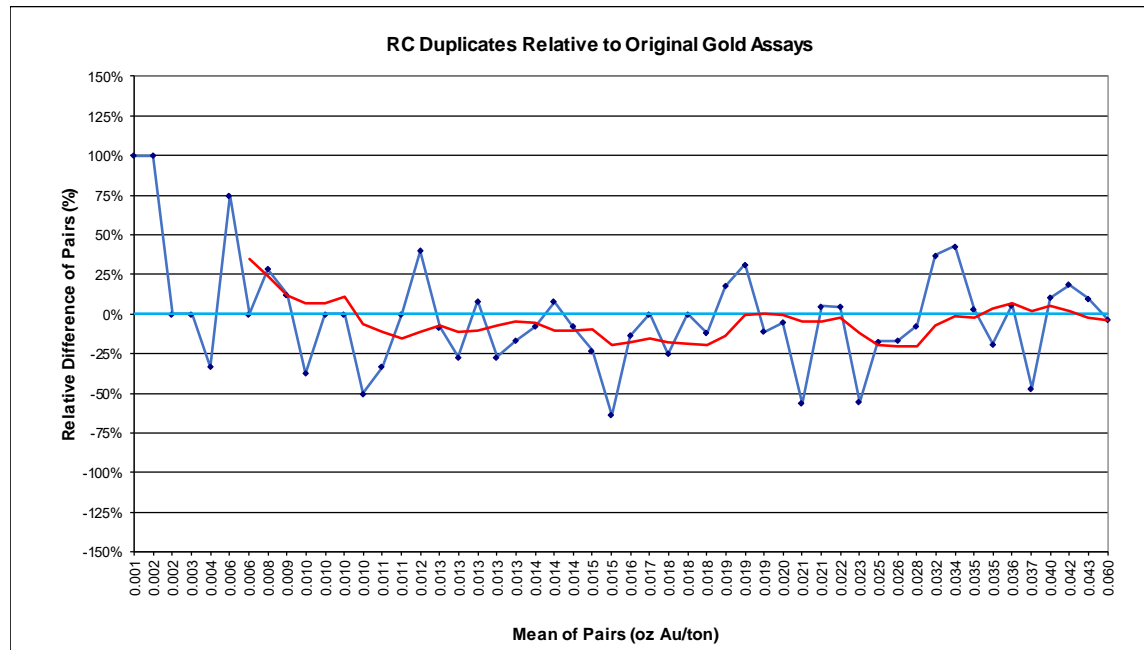

Note: Figure prepared by MDA, 2018.

The means of the RC duplicates compare well (0.018 versus 0.019 oz/ton Au, respectively), and the mean of the RDs is -1%. There is a suggestion of a low bias in the graph, although this is not well supported due to the low number of pairs. The average of the AVRDR is 23%, which is somewhat lower than expected, but could be due to the lack of higher-grade pairs.

The silver analyses of the RC duplicates are systematically lower than the originals, the mean of the duplicates is 0.092 oz/ton Ag while that of the originals is 0.099 oz/ton Ag, and the average of the RDs is -13%. The cause of this systematic low bias in the silver results is difficult to explain, but perhaps the bias would lessen with more data. The mean of the AVRDR is 23%; considering the presence of native gold, one would expect the gold variability to be higher than that of silver, which supports the conclusion above of the surprisingly low variability in the RC duplicate gold results.

11.4.6 Paramount 2018–2019

The QA/QC results from the two 2018 RC holes drilled at the North Spur target, which lies outside of the limits of the current Mineral Resources, were not reviewed in detail. The two 2019 geotechnical core holes were not sampled and analyzed.

11.4.7 Discussion of QA/QC Results

The available Atlas QA/QC data of consequence (the preparation and field duplicates) suggest that the original gold assay results may be overstated to some extent. However, the average grade of the duplicate dataset is much higher than the average grade of the Grassy Mountain deposit, and repeat analyses of only the higher-grade portion of a deposit with free gold can yield lower results than original assays. Without additional data, it is impossible to know whether there is a positive bias in the Atlas results, although a comparison of resources with and without Paramount drill data suggests there are no material issues with the Atlas data (see Section 14.9).

The Newmont QA/QC data do not identify any issues, while it is possible that the Tombstone gold values are slightly understated.

No issues were revealed by the Paramount CRM, blank, and preparation-duplicate data. The core duplicate data suggest that the Paramount gold assays of core, particularly at higher grades, may be understated to some degree. These data also serve to emphasize the importance of careful sampling and splitting of core-box fines.

The variability evidenced by the duplicate data from all operators at Grassy Mountain does not exceed normal bounds, especially considering the presence of visible gold.

11.5 Summary Statement

The QP is satisfied that the procedures and methods used for the sample preparation, analyses, and security of the historical and Paramount samples are adequate for generating reliable data that is acceptable as used in this Report.

12 DATA VERIFICATION

12.1 Drill-Hole Data Verification

The current Grassy Mountain drill-hole database, which forms the basis for the resource estimates in Section 14, consists of information derived from 472 drill holes. A total of 286 of these holes were drilled in the general area of the Grassy Mountain resource estimates, including 34 Paramount holes and 252 historical holes.

Paramount originally provided MDA with the Project drill-hole database prior to the initiation of the 2016–2017 drilling program. This database was then subjected to the data verification procedures discussed below and corrections were made as appropriate. Following the creation of a verified database, MDA periodically updated this database with the information acquired during Paramount's various drilling programs.

12.2 Collar Data

Atlas established a local grid coordinate system following the discovery of the Grassy Mountain deposit in 1988. This local coordinate system remained in use through to the acquisition of the project by Calico in 2011, following which Calico transformed all relevant project data, including the drill-hole coordinates, into UTM coordinates. The transformation was done by plotting all drill holes on digital topography of the Project area in the local coordinates system, projecting these data onto a USGS topographic base map in UTM zone 11 NAD27 coordinates, and rotating and scaling the local-grid data until the contours generated from the Atlas grid matched those from the USGS topographic map contours as closely as possible. The UTM coordinates of each drill hole were then determined. All holes from subsequent drilling programs were surveyed in UTM coordinates.

As part of the 2016–2017 drilling program, all prior drill-hole collars that could be identified in the field were re-surveyed. The collar locations of 82 Atlas drill holes, six Newmont drill holes, four Tombstone drill holes, and nine Calico drill holes were surveyed. MDA was provided the original digital file produced by the survey contractor, and MDA used this file to compare the new survey locations with those in the existing database. Excluding one drill hole, in which the location was known to be incorrect in the original project database, the northings from the new survey differed from the database locations by more than 3 ft in four drill holes, with a maximum change of 7 ft. The eastings differed by more than 3 ft in four drill holes, with a maximum change of 8 ft, and elevations of four drill holes differed by more than 3.0 feet, with a maximum change of 5 ft. These discrepancies were found in a total of eight of the 101 historical drill holes that were re-surveyed. The scale of the discrepancies in the drill-hole locations is not considered to be material due to the nature of the Grassy Mountain mineralization and the 5 x 10 x 10-ft block size used in modeling.

The collars of all holes drilled in 2016–2017 were also surveyed by the contractor. MDA used the original digital survey data for the historical and Paramount drill holes to update the drill-hole locations in the Project database.

In addition to the drill-hole locations, the total depths of 47 of the historical drill holes were checked against historical records. The depth of one drill hole was found to be off by one foot.

12.3 Down-Hole Survey Data

There are 43 historical holes drilled in the area of the Grassy Mountain resources that have down-hole survey data, and 14 of these were chosen for verification purposes. Excluding three Newmont drill holes, which are discussed below, a total of 168 survey intervals from six Atlas drill holes, two Tombstone drill holes, and three Calico drill holes were checked against historical records. Two azimuth measurements in the database were found to be off by <math><1^\circ</math>, and three inclination errors of

<1.5° were found. One of the azimuth errors and two of the dip discrepancies occurred in a single drill hole (Atlas hole 079-001). The Project database was corrected to match the historical records. Two survey intervals were also added to the Project database as a result of the auditing.

The down-hole survey data for three Newmont drill holes were also checked. Backup data consisted Newmont handwritten “Drill Hole Summary” sheets. The Project database includes more than twice the number of survey intervals than are listed on the summary sheets, and the database azimuths and inclinations have higher precision than those on the summary sheets. The database values are very close to those in the summary sheets, although the values only match exactly when the precision of the two datasets are identical. It appears that the summary sheets are exactly as they are named, which is to say they summarize the down-hole survey data.

There are 209 historical drill holes within the area of the resource estimates that lack down-hole survey data in the Project database. The drill-collar azimuths and dips for 40 of these drill holes were checked against historical records and no discrepancies were found.

MDA used digital data derived directly from the down-hole survey instrument to add the deviation data from Paramount’s drilling programs to the Project database. Down-hole surveys were completed on 28 of the holes drilled by Paramount; down-hole caving precluded surveys for five drill holes, and no deviation data were collected from a short (100-ft depth) geotechnical hole.

12.4 Assay Data

The original database provided to MDA included a total of 39,124 assay sample intervals from historical holes drilled in the area of the Grassy Mountain resource estimates. Of these sample intervals, the database assay values for 6,942 of the intervals from 38 Atlas drill holes, two Calico drill holes, seven Newmont drill holes, and four holes drilled by Tombstone were checked against historical documents. A total of only five errors in the database gold values were found, including two intervals with assay values from the assay certificates (0.002 and 0.004 oz/ton Au) that had no values in the database, two transcription errors whereby certificate values of 0.001 and 0.002 oz/ton Au were entered into the database as 0.010 and 0.020 oz/ton Au, respectively, and a value of zero in the database which should have been 0.054 oz/ton Au according to the assay certificate (the zero value was likely mistakenly transcribed from an adjacent column on the assay certificate). One silver error was found whereby a 0.28 oz/ton Ag value on the certificate was entered in the database as 0.2 oz/ton Ag.

In addition to the errors described above, there were 28 sample intervals with database gold and silver assay values of “0” that had no corresponding assays on the certificates; these intervals presumably had no sample recovery.

All identified errors were corrected in MDA’s database, and silver values found for one Atlas drill hole and three Tombstone drill holes that were not in the database were added to the database.

MDA received all digital assay certificates relating to Paramount’s 2016–2017 drilling program directly from ALS and used these to update MDA’s Project database.

12.5 Site Inspections

Mr. Gustin visited the Project site on August 18, 2016, November 17, 2016, and June 1, 2018. During these visits, Mr. Gustin reviewed altered and sometimes mineralized outcrops throughout the Grassy Mountain deposit area, as well as other areas within and outside of Paramount’s landholdings. Active core and RC drill sites with ongoing sampling and logging were also visited. Each of the three site visits included additional days at the Vale field office inspecting drill core from a number of holes and reviewing all Project procedures related to logging, sampling, and data capture.

Paul Tietz, MDA Senior Geologist and a Qualified Person independent of Paramount, visited the Vale facility for three days in December of 2016 and again in January, February, and March 2017, for a total of 18 additional days. Two of these days were spent at the Grassy Mountain deposit area becoming familiar with the geology of the deposit. The remainder of the time was spent reviewing drill core and Project data in detail, as well as assisting Paramount's geological team with the cross-sectional geological modeling that was eventually used as a base for resource modeling. These activities involved detailed checking, validation, and in some cases modifications of the Paramount and historical geological data, interpretations, and geological modeling of the Grassy Mountain deposit.

Steve Weiss, an Associate of MDA and a Qualified Person independent of Paramount, completed a five-day geologic field inspection at the Grassy Mountain project and seven days of on-site drill data and drill-sample review and evaluation in March 2017. This work was carried out interactively with Paramount's Project geologists. Time was also spent completing detailed checking, validation, and in some cases modifications of the Paramount and historical geological data and interpretations for the Grassy Mountain deposit and other mineralized areas within the Project area.

The work of both Mr. Weiss and Mr. Tietz during these site visits contributed to Mr. Gustin's understanding of the project and confidence in the project data.

12.6 Summary Statement

The QP experienced no limitations with respect to data verification activities for the Grassy Mountain Project. In consideration of the information summarized in Sections 6 through 12 of the Report, the QP has verified that the Grassy Mountain Project data are acceptable as used in this Report, most significantly to support the estimation and classification of the Mineral Resources.

13 MINERAL PROCESSING AND METALLURGICAL TESTING

13.1 Introduction

The Grassy Mountain deposit has been the subject of several metallurgical testwork programs and previous studies, as described in Section 13.2.

During the 2018 PFS, the testwork program was focused on a gravity, leach and adsorption flowsheet comprising:

- Primary grind (P80 150 μm);
- Gravity gold recovery;
- Cyanide leaching;
- Adsorption in a carbon-in-leach (CIL) circuit;
- Cyanide destruction.

During the 2020 FS, the leach flowsheet design was modified to a simpler, lower capital cost alternative comprising:

- Primary grind (P80 106 μm);
- Hybrid leach–CIL circuit;
- Mercury removal circuit;
- Cyanide destruction.

13.2 Historical Testwork Programs

13.2.1 Historical Studies 1989 to 2012

In support of the 2020 FS, historical work conducted by Hazen, Golden Sunlight, Newmont and Resource Development Inc. (RDI) was reviewed. The degree to which historical metallurgical samples are representative of the Grassy Mountain deposit is not known with certainty, but there is no evidence that the historical samples were not representative. Early historical work listed above is viewed as indicative or informative only since the QP was not able to reconcile the test results to drill hole locations and depth to confirm that these drill holes represent the ore in the current mine plan.

Historical results are presented in Section 13.4, where relevant to the current flowsheet.

13.2.2 Historical Testwork from 2018 PFS

In 2017, Ausenco oversaw metallurgical testing to develop data for the 2018 PFS for the Grassy Mountain Project.

13.2.2.1 2018 PFS Sample Selection

Nine samples were submitted for metallurgical testing. Lithologies were identified by Ausenco, under the guidance of the Paramount technical team. Samples were described as Arkose, Mixed Lithology Drop Weight Test (MLDWT), Mixed Lithology Low Grade (ML-LG), Mixed Lithology Average Grade (ML-1), Mixed Lithology Average Grade (ML-2), Mixed Lithology High Grade (HG), Silt Stone (SLST), Mudstone and Clay Mixed Breccia (CMB).

13.2.2.2 2018 PFS Testwork Scope

SGS Canada Inc. (SGS) in Vancouver, Canada conducted the metallurgical testing shown in Table 13-1 under program 15944-001.

13.3 2020 FS Testwork

13.3.1 Objectives

Metallurgical test work in support of the 2020 FS was defined based on review of historical work and consideration of the mine plan prepared during the 2018 PFS. Consideration was also given to potential for optimization, and flowsheet simplification.

The program was designed with the intent to confirm the parameters for the process design criteria for comminution, leaching, carbon adsorption and cyanide destruction in the process plant and to assess recovery as a function of head grade. The metallurgical program was conducted at SGS.

Supplementary work to support recovery estimation was conducted at McClelland Laboratories, Inc (Sparks, Nevada); (McClelland).

13.3.2 SGS Testwork Program 15944-02 Scope of Work

Six samples were sent to SGS for metallurgical testing.

The range of tests and samples used for each test is summarized in Table 13-2.

13.3.3 McClelland Testwork Program MLI 4551 Scope of Work

Twelve samples were sent to McClelland for metallurgical testing.

The testwork program scope included determination of head assays and leach tests.

13.3.4 Sample Selection for SGS Program 15944-02

The composite samples were selected by Paramount with input from Ausenco to represent the production composites for the proposed Year 1 and Year 2 of operations, and the major lithologies, Arkose, Siltstone and Sinter (Table 13-3).

The metallurgical program was performed on the following composites: Year 1, Year 2, Arkose, Siltstone, Sinter and un-used ML-LG sample from the 2017/2018 testwork program.

Since there was insufficient sample available of the Year 1 composite for comminution testing, it was decided to test the comminution properties for each of the major lithologies for Year 1 as an alternative. A low-grade sinter sample was provided for comminution testing.

13.3.5 Sample Selection for McClelland Program MLI 4551

Samples tested at McClelland were made up from drill core as composites to represent the ore that will be mined during the first two years of production. Twelve grade variability composite samples (4551-001 to 012) and one master composite sample (4551-013) were tested. Variability composite samples calculated gold and silver grades ranged from 3.57–13.13 g/t Au and 5.1–21.5 g/t Ag.

Table 13-1: 2018 PFS Testwork Scope

Sample ID	Head Assay	JK DWT	E-GRG	Gravity Separation	Bulk Leach on Gravity Tailing	Cyanide Destruction	Carbon Modelling	Rheology	Solid/Liquid Separation
Arkose	x	x	—	x	x	x	—	x	x
MLDWT	x	x	—	x	x	x	x	x	x
ML-LG	x	—	x	x	x	—	—	—	—
ML-1	x	—	x	x	x	—	—	—	—
ML-2	x	—	—	x	x	x	—	—	—
HG	x	—	x	x	x	—	—	—	—
SLST	x	—	—	x	x	x	—	x	x
Mudstone	x	—	—	x	x	—	—	—	—
CMB	x	—	—	x	x	x	—	—	—

Table 13-2: Metallurgical Test Matrix for SGS Program 15944-02

Sample ID	Head Assay	Mineralogy Analysis	Comminution RWI & BWI	Bottle Roll Leach	Oxygen Uptake	Bulk Leach	Cyanide Destruction
Year 1	x	x	—	x	x	—	—
Year 2	x	—	x	x	x	—	—
Arkose	x	—	x	x	—	—	—
Siltstone	x	—	x	x	—	—	—
Sinter	—	—	x	—	—	—	—
ML-LG	x	—	—	—	—	x	x

Table 13-3 : 2020 FS Production Composites Sample Composition

Sample	% Arkose	% Siltstone	% Sinter
Year 1	39.4	44.5	16.0
Year 2	49.4	44.3	6.3

Composites 4551-001 through 4551-006 were designated as Year 1 composites and composites 4551-007 through 4551-012 were designated as Year 2 composites. Year 1 composites were prepared to represent a lithology make-up of 6% sinter, 40% siltstone and 54% arkose by mass. Year 2 composites were prepared to represent a lithology make-up of 7% sinter, 45% siltstone and 47% arkose by mass.

A 15 kg master composite sample was generated, designated as 4551-013. This composite was composed of select interval samples used in the variability composites. The lithology make-up of this composite was 6% sinter, 43% siltstone, and 51% arkose by mass.

13.4 Presentation and Discussion of Results

13.4.1 Ore Characterization and Deleterious Elements

Ore composition was investigated in SGS Program 15944-02. Selected head assays are presented in Table 13-4.

Table 13-4: Head Assays

Sample ID	Au (g/t)	Ag (g/t)	Hg (g/t)	ST (%)	S2-S (%)	SO ₄ -S (%)	CT (%)	TOC (%)	Cu (g/t)	Fe (%)	As (g/t)
Year 1	9.56	12.9	2.054	0.22	0.08	0.14	0.09	0.09	13.7	0.69	167
Year 2	7.84	12.5	2.639	0.44	0.27	0.15	0.12	0.12	15.6	0.92	181
Arkose	9.66	11.7	2.066	0.18	0.08	0.1	0.06	0.06	11.6	0.58	119
Siltstone	24.71	34.2	2.156	0.42	0.26	0.14	0.35	0.35	15.7	0.93	183
ML-LG	1.69	8.48	1.858	0.43	0.25	0.15	0.04	<0.05	36.6	0.84	156

The conclusion of these results is that mercury is present in high enough concentrations to warrant removal and management, and this has been incorporated into the flowsheet. No other elements are present at levels that are cause for concern.

13.4.2 Comminution Test Results

13.4.2.1 Hazen 1989

The historical comminution testwork conducted by Hazen in 1989 and as reported by RDI in 2012 is summarized in Table 13-5.

Table 13-5: Hazen 1989 Comminution Results

Description	Units	Sample Description				
		Zone 1	Zone 2	Zone 3	Composite	High Grade
Product Size, 80% passing	µm		551	483	541	
Bond rod mill work index, RWi	kWh/ton		18.0	17.2	17.6	18.2
Bond ball mill work index, BWi	kWh/ton		21.3	17.7	20.2	
Bond abrasion index, Ai		0.711	0.783	0.529	0.714	

13.4.2.2 SGS Program 15944-001

JK drop-weight tests (DWT) were conducted on the arkose and MLDWT samples. The data were interpreted by JK Tech Pty Ltd (JK Tech) and a summary of results is presented in Table 13-6.

Table 13-6: Summary of JK DWT Results

Sample ID	SG	t _a	A	b	Axb
Arkose	2.56	0.13	100	0.32	32.0
MLDWT	2.51	0.15	99.8	0.30	29.9

Note: The JKTech Drop-Weight test provides ore-specific parameters for use in the JKSimMet Mineral Processing Simulator Software. The t_a parameter indicates resistance to abrasion. The Axb parameter indicates resistance to impact breakage.

The impact breakage data of these samples showed they can be classified as hard when compared to other samples in the JKTech database. The JK DWT results were used by Ausenco to estimate the crusher work index at 20.9 kWh/ton.

13.4.2.3 SGS Program 15944-02

Rod mill work indices presented in Table 13-7.

Table 13-7: Bond Rod Mill Grindability Test Results

Sample ID	Mesh of Grind	Work Index (kWh/t)	Hardness Percentile	Category
Year 2	14	20.1	96	very hard
Arkose	14	17.4	82	hard
Siltstone	14	20.3	97	very hard
Sinter	14	20.4	97	very hard

Bond ball mill work indices are presented in Table 13-8.

Table 13-8: Ball Mill Work Indices

Sample ID	Mesh of Grind	Work Index (kWh/t)	Hardness Percentile	Category
Year 2	100	24.1	99	very hard
Arkose	100	18.9	88	hard
Siltstone	100	24.8	99	very hard
Sinter	100	29.0	100	very hard

Bond ball mill work indices were performed at a closing screen size of 100 mesh, or 150 μm .

The samples tested were categorized as hard to very hard; this finding aligns with previous findings from historical testwork.

13.4.3 Mineralogical Analysis

13.4.3.1 Hazen 1990

Mineralogical examinations of ore from Zones 1, 2 and 3 showed that they were similar and composed mainly of quartz and orthoclase feldspar. Minor amounts of pyrite were noted, mostly less than 5 μm but ranging up to 20 μm , along with native gold ranging from 50–250 μm in Zones 1 and 3 and up to 600 μm in Zone 2.

13.4.3.2 SGS Program 15944-02

The mineralogical investigation was performed on the Year 1 sample which was stage crushed to a P_{80} size of 150 μm . A 100 g sample was extracted by riffle splitting for quantitative evaluation of materials by scanning electron microscopy (QEMSCAN) testing and 900 g was submitted for a gold deportment study. The gold deportment subsample was concentrated using gravity methods and examined using the Tescan Integrated Mineral Analyzer (TIMA).

Findings included:

- Electrum accounts for 77.4% of the total gold grade; the remainder is present as native gold;
- Gold association: The liberation of gold is high at 77.5%. Most of the remainder is associated with light silicates;
- Gold exposure: The exposure of gold (>20% exposure) is good at 89.1%. Gold which is well exposed (>20% exposure) should be readily amenable to leaching;
- Gold association by size and gold mineral sizes: the majority (81%) of gold mineral grains are <30 μm in size, the non-liberated grains typically occur in association with light silicates, complex particles and rarely with oxides, pyrite and silver minerals. Gold grains coarser than 30 μm are liberated. Most gold grains would be leachable;
- Mineral composition is predominantly quartz (63.6%) and K-feldspar (30.7%), with trace amounts (<2%) of clays, sericite/muscovite, plagioclase and other minerals. Pyrite is detected in trace amounts (0.30%). Chalcopyrite and other copper sulfides are present in trace amounts (0.03%).

13.4.4 Leach Tests

13.4.4.1 Evaluation of Grind Size, SGS Program 15944-02

The Year 2 sample was crushed in three stages to -2 mm. A single point grind calibration was conducted on a 1 kg charge in a laboratory rod mill to determine the grind time required to achieve the fineness of grind. A series of standard bottle roll tests were conducted on the Year 2 sample at three grind sizes (P_{80} of 100 μm , 75 μm and 53 μm) and two cyanide concentrations (0.5 and 1.0 g/L).

Leaching conditions were a pulp density of 45% solids, pH of 10.5–11 with lime addition and leach time of 24, 48 and 72 hours.

Residue grades decreased with finer grind, for all leach times evaluated.

A P_{80} grind size of 106 μm was used in the 2020 FS; however, provision to grind finer to 75 μm was considered in sizing the ball mill.


13.4.4.2 Evaluation of Leach Time, SGS Program 15944-001

A 20 kg sample of each lithology (all nine samples) was ground and passed by a Knelson MD-3 concentrator. The concentrate obtained was further upgraded with a Mozley C800 laboratory separator. The tailings from the Knelson concentrator and Mozley separator were combined and ground to a target P_{80} size of 106 μm and submitted for bulk leach testing by CIP or CIL.

For the bulk agitated leach tests, approximately 10 kg of gravity tailings was pulped to 45% solids, pH was adjusted to 10.5–11 with lime, dissolved oxygen (DO) was maintained at >6 ppm, 0.5 g/L of NaCN was added and 0.25 g/L NaCN was maintained throughout the leaching process. Carbon concentrations of 12 g/L and 15 g/L were added for CIL and CIP respectively. The residence times were 48 hours and 72 hours for the CIL and CIP tests respectively. Carbon was added to the pulp at 48 hours for the CIP test. Pre-aeration of three hours was included for both tests.

Relevant results from SGS Program 15944-001 that align with the selected flowsheet and include samples representative of ore that is included in the 2018 PFS mine plan are shown in Figure 13-1. These results show that gold leaching is fast and complete within 24 hours.

Figure 13-1: Gold Leach Extraction Rate

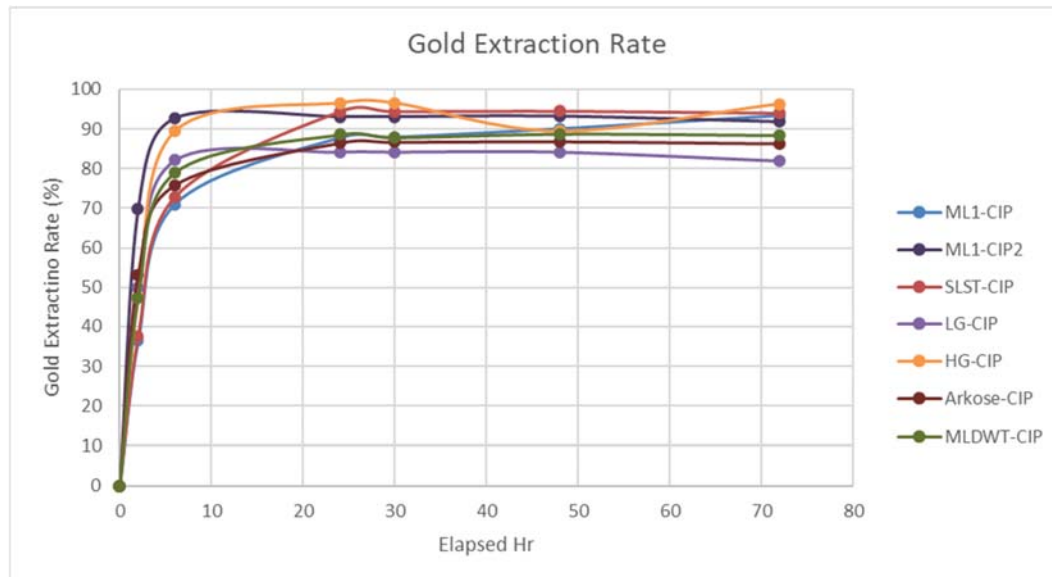

Note: Figure prepared by Ausenco, 2020.

13.4.4.3 Evaluation of Leach Time, SGS Program 15944-02

A series of standard bottle roll tests were conducted on the Year 1, Year 2 and Arkose and Siltstone samples at two grind sizes (P_{80} of 100 μm and 75 μm and two cyanide concentrations (0.5 and 1.0 g/L. Leaching conditions comprised:

- Sample mass of 1.0 kg, pulp density of 45% solids;
- pH at 10.5–11 with lime addition and leach time of 30, 48 and 72 hours.

For each test a 1.0 kg charge was ground to the target grind size and pulped to 45% solids. The pH was adjusted to 10.5–11 using lime and DO was maintained at > 6 mg/L. Three hours of pre-aeration using air were applied to all samples.

A lower level of confidence was placed in these results as the solution assay results were erratic; however, the same trends were seen as in more reliable testwork, i.e. a fast initial leach rate and completion of the gold leach reaction within 24 hours.


13.4.4.4 Evaluation of Leach Time, McClelland Program MLI 4551

Twelve grade variability composite samples of 1 kg each were prepared for mechanical agitation leach testing. The samples were stage ground to 80% passing 106 μm in a laboratory steel ball mill. Samples were prepared in order of estimated increasing gold grade. Following each composite, the mill was cleaned by grinding barren silica sand.

After grinding, samples were slurried to 45% solids and pH was adjusted to 10.8–11.2 by adding hydrated lime. Slurries were sparged with air for three hours prior to leaching at 0.5 g/L sodium cyanide. Leaching was conducted by mechanically agitating the slurries in baffled, air sparged leaching vessels for 48 hours.


Results are presented in Figure 13-2 and Figure 13-3 and show the gold leach rate flattening by 24 hours, supporting the selection of the leach time at 24 hours.

Figure 13-2: Gold Leach Extraction Rate for Grade Variability Samples

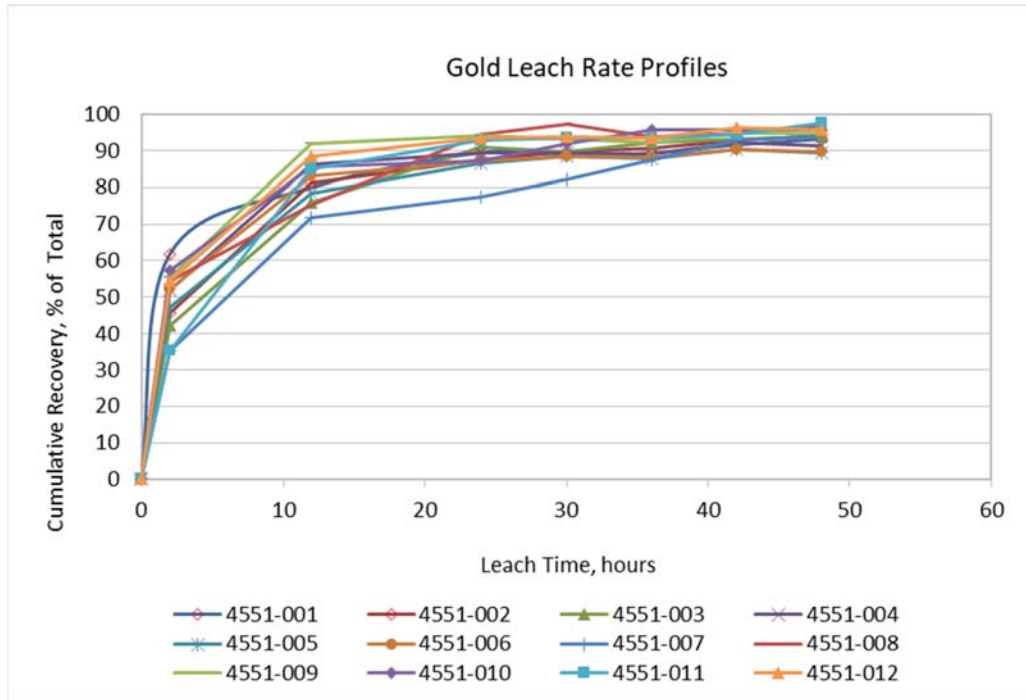

Note: Figure prepared by Ausenco, 2020.

Figure 13-3: Silver Leach Extraction Rate for Grade Variability samples

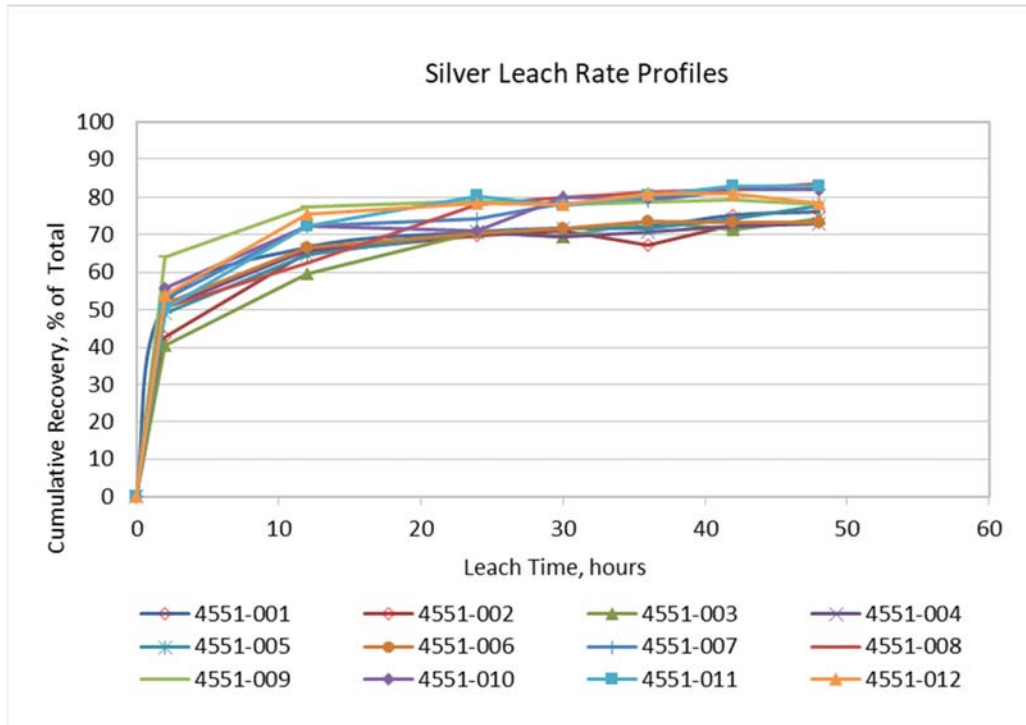

Note: Figure prepared by Ausenco, 2020.

McClelland commented that similar dips in the solution grades over time were observed as seen in the SGS program 15944-02 data, and that this is thought to be indicative of the possible presence of preg-borrowing clays.

13.4.4.5 Effect of Pre-aeration, SGS Program 15944-02

A round of tests were carried out which included a three-hour pre-aeration step ahead of the leach. Tests were conducted at 100 µm grind size, 45% solids, pH 10.5–11, and DO maintained at >7 for CN3 and >9 for CN9 and CN10 tests.

For tests conducted at 0.5 g/L cyanide addition with and without pre-aeration, cyanide consumption reduced from 0.23 to 0.12 g/t with pre-aeration for the Year 1 sample and from 0.14 to 0.11 g/t for the Year 2 sample. From this investigation it can be concluded that pre-aeration is beneficial to leach kinetics in all cases and to overall recovery, particularly for the Year 2 sample. A three-hour pre-aeration step was incorporated into the plant design.

13.4.4.6 Leach Reagent Consumption, SGS Program 15944-001, SGS Program 15944-02 and McClelland Program MLI 4551

Cyanide and lime consumption rates from all leach tests that included the three-hour pre-aeration step and conducted on relevant lithologies are shown in Table 13-9.

Table 13-9: Average Cyanide and Lime Consumption

Test Description	Cyanide addition (g/L)	Cyanide Consumption (kg/t)	Lime Consumption (kg/t)
Bottle roll, PFS	0.5	0.34	0.84
Bottle roll, FS	0.5	0.17	1.27
Bottle roll, FS	1.0	0.27	1.27
Agitated leach, FS	0.5	0.90	2.74

A cyanide consumption of 0.34 g/t and lime consumption of 1.05 kg/t respectively were selected for use in estimating plant operating costs. These values align with the bottle roll test results as these are believed to be a closer representation of plant consumption than the agitated leach tests.

13.4.4.7 Oxygen Uptake Test, SGS Program 15944-02

Two oxygen uptake tests were conducted on each of the Year 1 and Year 2 samples. Samples were ground to a P80 size of 102 µm and pulped to 45% solids with water in a stirred glass reflux reactor at ambient temperature. The sample was agitated with an impeller using a Caframo mixer at 300 rpm throughout the test (~150 rpm for readings). The pulp pH was adjusted to 10.5–11.0 and cyanide was added. Air was sparged into the pulp sample to maintain the dissolved at 10–13 mg/L. The DO content of the slurry was measured for a total time of 15 minutes, at one-minute intervals. During these readings, the air sparge was removed from the pulp, remaining in the headspace of the vessel. DO readings were taken at 0, 2, 4, 8, 12, 24, 30, and 36 hours.

The test results show that the oxygen uptake rate was very low, showing that the Year 1 and Year 2 samples were low oxygen consumers. Air was selected as the source of oxygen for the plant design.

13.4.4.8 Mercury Dissolution Test, SGS Program 15944-02

Mercury concentrations in the final (48 hour) solutions were 0.25 mg/L and 0.26 mg/L for arkose and siltstone samples, respectively. Mercury analysis in the final (30 hour) solution samples for Year 1 pregnant solutions were 0.16 and 0.25 mg/L for tests with 0.5 and 1.0 g/L

of cyanide addition respectively. For Year 2 pregnant solutions, the results were 0.08 and 0.18 mg/L for tests with 0.5 and 1.0 g/L of cyanide addition respectively.

13.4.5 Cyanide Destruction

13.4.5.1 Historical Results

Cyanide destruction was investigated by SGS (Table 13-10) and acceptable results were achieved relative to the Project design value of <15 mg/L weakly acid dissociable cyanide (CN_{WAD}).

Table 13-10: Cyanide Destruction Test Results from Historical Work

Test Program	Sample Description	Test	Feed Concentration (CN WAD mg/L)	Product Concentration (CN WAD mg/L)
SGS Program 15944-001	3 lithology samples, continuous tests (MLDWT-CIP, Arkose-CIP, SLST-CIP)	SO ₂ /air	110–149	0.04–0.1

13.4.5.2 SGS Program 15944-02 Results

A 10 kg bulk cyanide CIP leach test was performed on the ML-LG sample to produce cyanide-leached pulp for cyanide destruction testwork. This sample was selected as it contained sulfide sulfur and iron concentrations representing the upper limits in the Year 1 and 2 samples. The test was conducted in a 20 L pail with an overhead mixer with three hours of pre-aeration. The test conditions were a sample mass of 10 kg, grind size (P80) of 106 µm, pulp density 45% solids, NaCN concentration of 0.5 g/L, pH of 10.5–11 with lime addition, Carbon addition of 15 g/L after 10-hour leach, and a leach time of 48 hours.

Test results are shown in Table 13-11. The test achieved very low levels of CN_{WAD} (0.13 mg/L) under continuous operation. Reagent addition rates (SO₂, copper sulfate and lime) were typical for this process.

13.5 Recovery Estimation

13.5.1 Leach Recovery, SGS Program 15944-001, SGS Program 15944-02 and McClelland Program MLI 4551

The data in Table 13-12 were used as the basis for estimation of recovery for 2020 FS.

While the data includes leach tests that ran for longer than the selected leach time of 24 hours, the leach curves shown in Section 13.4 flatten out after 24 hours, giving the same recovery at longer leach times. These data were considered to be sufficiently valid to be included in recovery estimation.

Table 13-11: Cyanide Destruction Test Results – Continuous Test

Test ID	Conditions					Total Continuous Test										
	Feed Pulp Volume	Pulp Density	Feed CN _{WAD}	Test pH	Test DO	Discharge Pulp Volume	Total Run Time	Retention Time	Discharge CN _{WAD}	Discharge CN _{Total}	Discharge SCN	Discharge CNO	Ratio of SO ₂ -CN _{WAD}	SO ₂ Addition	Ratio of Cu-CN _{WAD}	Ratio of Lime-CN _{WAD}
	L	%	mg/L		mg/L	L	min	min	mg/L	mg/L	mg/L	mg/L	g/g	g/L pulp	g/g	g/g
ML-LG	16.9	40	200	8.6	5.2	14.5	140	51	0.13	0.34	6.9	330	4.23	0.71	0.06	2.1

Table 13-12: Leach Test Data Used for Recovery Estimation

Test Campaign	Test Number	Target Grind Size (µm)	Retention Time (hours)	Leach/CIL	Leach Feed Source	Cyanide Addition (g/L)	Cyanide Maintained At (g/L)	Leach Feed Grade, Au Calculated (g/t)	Residue Grade, Au (g/t)	Leach Feed Grade, Ag Calculated (g/t)	Residue Grade, Ag (g/t)	Leach Recovery, Au (%)	Leach Recovery, Ag (%)
SGS Program 15944-001	ML1-CIL-A	100	48	CIL	Whole ore	0.5	0.25	4.48	0.36			91.96	
	ML1-CIL-B	103	48	CIL	Whole ore	0.5	0.25	4.47	0.69			84.56	
	HG-CIL-A	89	48	CIL	Whole ore	0.5	0.25	10.01	0.67			93.30	
	ML1-CIL	99	48	CIL	Gravity tails	0.5	0.25	4.15	0.25	7.67	2.60	93.97	66.11
	ML1-CIL2	104	48	Leach CIP	Gravity tails	1	0.5	4.38	0.35	9.32	3.15	92.01	66.19
	SLST-CIL	114	48	CIL	Gravity tails	0.5	0.25	3.96	0.25	10.13	2.75	93.69	72.85
	LG-CIL	96	48	CIL	Gravity tails	0.5	0.25	1.62	0.29	8.41	2.85	82.07	66.11
	HG-CIL	99	48	CIL	Gravity tails	0.5	0.25	8.88	0.34	15.60	2.40	96.17	84.62
	Arkose-CIL	116	48	CIL	Gravity tails	0.5	0.25	2.89	0.39	8.17	3.35	86.51	59.00
	MLDWT-CIL	107	48	CIL	Gravity tails	0.5	0.25	2.47	0.31	7.65	3.00	87.45	60.76


Test Campaign	Test Number	Target Grind Size (µm)	Retention Time (hours)	Leach/CIL	Leach Feed Source	Cyanide Addition (g/L)	Cyanide Maintained At (g/L)	Leach Feed Grade, Au Calculated (g/t)	Residue Grade, Au (g/t)	Leach Feed Grade, Ag Calculated (g/t)	Residue Grade, Ag (g/t)	Leach Recovery, Au (%)	Leach Recovery, Ag (%)
SGS Program 15944-002	Year 1-CN9	98	30	Leach	Whole ore	0.5	0.5	11.29	0.40	14.01	2.80	96.46	80.01
	Year 1-CN10	98	30	Leach	Whole ore	1	1	11.33	0.37	14.07	2.70	96.73	80.82
	Year 2-CN9	101	30	Leach	Whole ore	0.5	0.5	7.12	0.72	12.30	3.60	89.89	70.72
	Year 2-CN10	101	30	Leach	Whole ore	1	1	7.15	0.51	12.26	2.70	92.87	77.98
	Year 1-CN11	75	30	Leach	Whole ore	0.5	0.5	9.76	0.35	15.00	2.70	96.41	82.00
	Year 2-CN11	74	30	Leach	Whole ore	0.5	0.5	7.10	0.39	15.04	3.20	94.51	78.73
	Year 2-CN12	101	48	Leach	Whole ore	1	1	6.97	0.50			92.83	
	Year 2-CN13	74	48	Leach	Whole ore	1	1	6.99	0.42			93.99	
	Year 2-CN14	51	48	Leach	Whole ore	1	1	6.94	0.35			94.96	
	Arkose-CN1	99	48	Leach	Whole ore	0.5	0.5	11.80	0.51	13.33	2.60	95.68	80.49
Siltstone-CN1	105	48	Leach	Whole ore	0.5	0.5	17.92	1.18	18.07	2.20	93.42	87.83	
McClelland Program MLI 4551	AL-7 4551-001	106	48	Leach	Whole ore	0.50	0.50	8.85	0.61	14.6	3.5	93.11	76.03
	AL-9 4551-002	106	48	Leach	Whole ore	0.50	0.50	10.18	0.59	14.6	3.9	94.20	73.29
	AL-5 4551-003	106	48	Leach	Whole ore	0.50	0.50	7.10	0.45	13.5	3.5	93.66	74.07
	AL-3 4551-004	106	48	Leach	Whole ore	0.50	0.50	5.20	0.45	11.1	3	91.35	72.97
	AL-11 4551-005	106	48	Leach	Whole ore	0.50	0.50	11.17	1.19	21.5	4.8	89.35	77.67
	AL-1 4551-006	106	48	Leach	Whole ore	0.50	0.50	3.57	0.37	9.3	2.5	89.64	73.12
	AL-6 4551-007	106	48	Leach	Whole ore	0.50	0.50	8.01	0.47	11	2	94.13	81.82
	AL-10 4551-008	106	48	Leach	Whole ore	0.50	0.50	13.13	0.42	9	1.5	96.80	83.33

Test Campaign	Test Number	Target Grind Size (µm)	Retention Time (hours)	Leach/CIL	Leach Feed Source	Cyanide Addition (g/L)	Cyanide Maintained At (g/L)	Leach Feed Grade, Au Calculated (g/t)	Residue Grade, Au (g/t)	Leach Feed Grade, Ag Calculated (g/t)	Residue Grade, Ag (g/t)	Leach Recovery, Au (%)	Leach Recovery, Ag (%)
	AL-2 4551-009	106	48	Leach	Whole ore	0.50	0.50	4.29	0.23	9.1	2	94.64	78.02
	AL-12 4551-010	106	48	Leach	Whole ore	0.50	0.50	11.02	0.48	9.4	1.7	95.64	81.91
	AL-8 4551-011	106	48	Leach	Whole ore	0.50	0.50	8.75	0.22	13.9	2.4	97.49	82.73
	AL-4 4551-012	106	48	Leach	Whole ore	0.50	0.50	6.21	0.27	5.1	1.1	95.65	78.43

13.5.1.1 Leach Recovery Estimate


The data in Table 13-12 were used to derive a relationship between leach feed and residue grades for both gold and silver, as shown in Figure 13-4 and Figure 13-5.

Figure 13-4: Relationship Between Leach Feed and Residue Grades for Gold

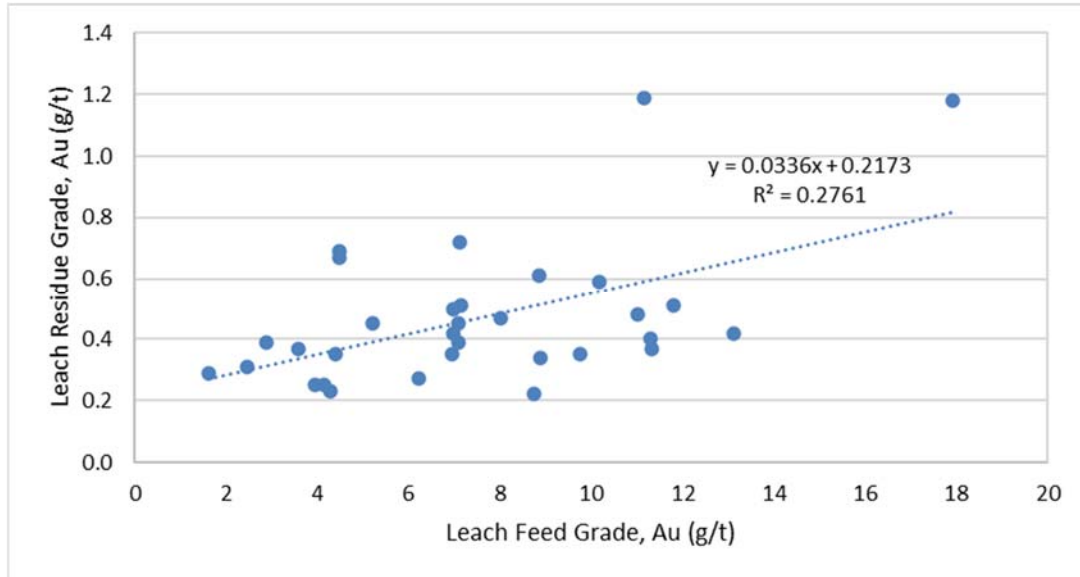

Note: Figure prepared by Ausenco, 2020.

Figure 13-5: Relationship Between Leach Feed and Residue Grades for Silver

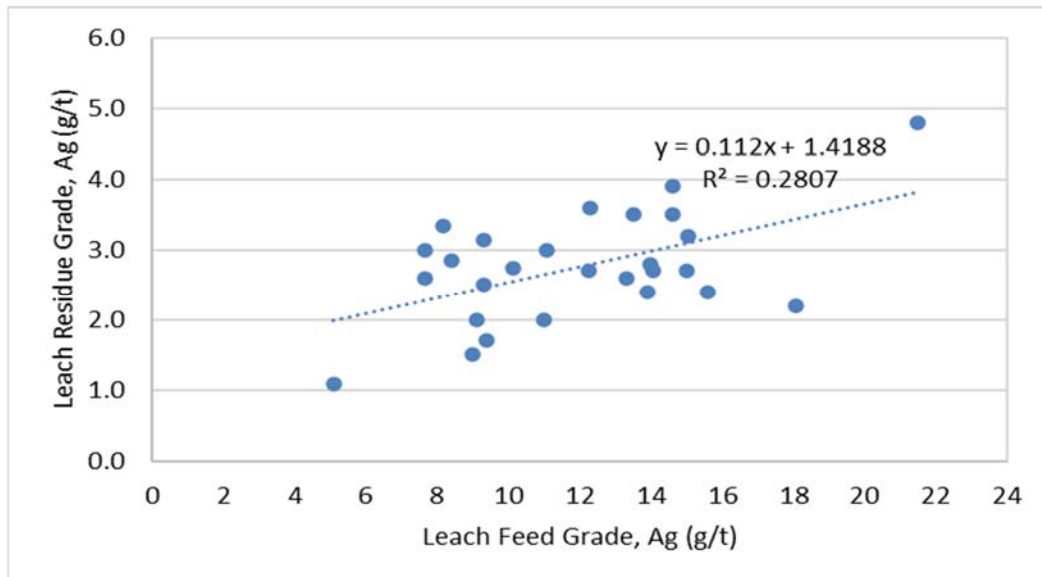

Note: Figure prepared by Ausenco, 2020.

The following relationships were derived from the data in Figure 13-4 and Figure 13-5 to calculate leach gold recovery:


- Leach Residue Grade = 0.0336 (Leach Feed Grade) + 0.2173;
- Leach Recovery = (1-leach residue grade/leach feed grade) * 100.

The following relationships were derived from the data in Figure 13-4 and Figure 13-5 to calculate leach silver recovery:

- Leach Residue Grade = 0.112 (Leach Feed Grade) +1.4188;
- Leach Recovery = (1-leach residue grade/leach feed grade) * 100.


Predicted leach recovery is compared to recovery achieved in testwork for gold and silver in Figure 13-6 and Figure 13-7, respectively.

Figure 13-6: Predicted versus Measured Recovery for Gold

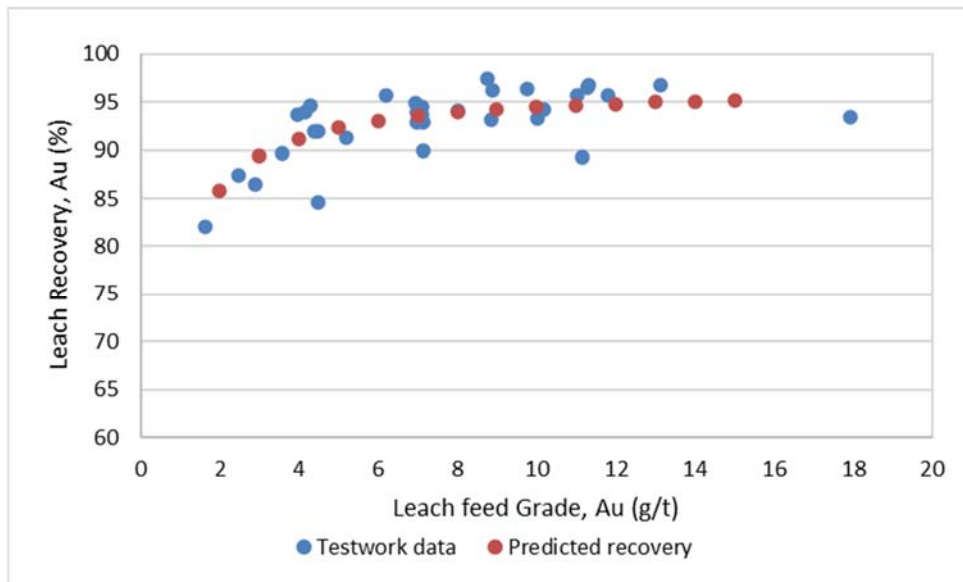

Note: Figure prepared by Ausenco, 2020.

Figure 13-7: Predicted versus Measured Recovery for Silver

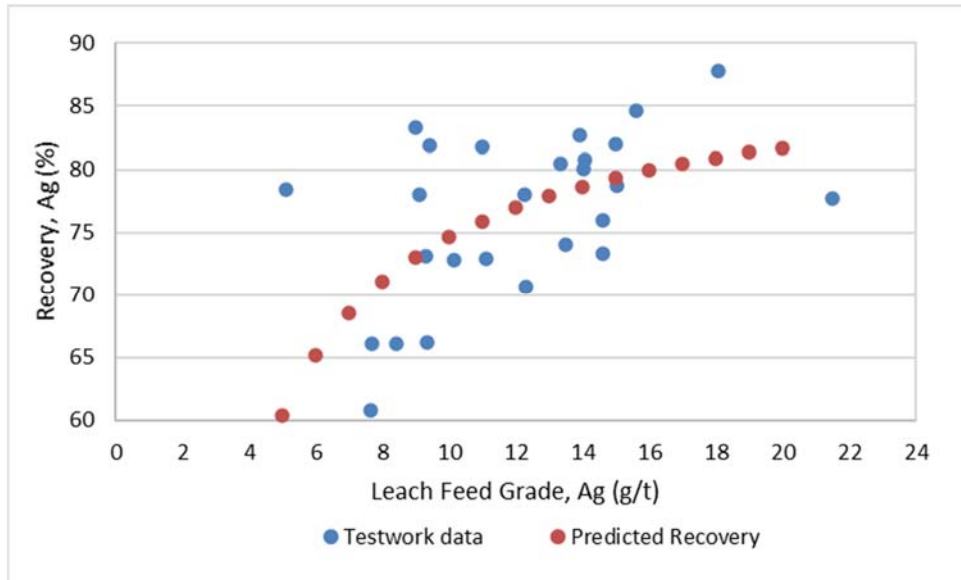

Note: Figure prepared by Ausenco, 2020.

13.5.1.2 Estimation of Plant Losses

Additional plant losses for gold were estimated and are shown in Table 13-13.

Table 13-13: Estimated Additional Plant Losses for Gold

Description	Units	Values		
Head Grade	g/t Au	≤6	>6 to ≤ 9	>9
Solution loss	%	0.33	0.35	0.37
Fine carbon loss	%	0.04	0.03	0.03
Other loss plant operation	%	0.10	0.10	0.10
Total additional plant losses	%	0.47	0.49	0.49

Additional plant losses for silver were estimated and are shown in Table 13-14.

Table 13-14: Estimated Additional Plant Losses for Silver

Description	Units	Value
Solution loss	%	0.33
Fine carbon loss	%	0.06
Other loss plant operation	%	0.10
Total additional plant losses	%	0.49

13.5.1.3 Overall Recovery Estimate

Overall plant recovery for gold and silver is calculated as the leach recovery less the plant losses. Recovery was calculated monthly as a function of head grades for gold and silver based on the feasibility study mine plan.

13.6 Conclusions

Three recent testwork programs (SGS Program 15944-001, SGS 15944-02 and McClelland MLI 4551) were completed between 2017 and 2020 on samples from the Grassy Mountain deposit to confirm design information and metallurgical response which would provide a basis for process flowsheet selection and recovery estimation.

Between the various recent testwork programs, composite samples representing major lithologies, Year 1 and Year 2 production composites and a range of head grades aligned with the minimum and maximum values expected in the plant feed in the initial two years of production were tested.

The grade variability composite samples calculated gold and silver grades ranged from 3.57–13.13 g/t (0.104–0.383 oz/ton) Au and 5.1–21.5 g/t (0.149–0.628 oz/ton) Ag.

Comminution testing showed that all the materials tested are considered very hard, with Bond ball mill work indices ranging from 18.1 to 29 kWh/t.

Bottle roll and agitated batch leach tests showed that the materials were highly responsive to recovery by cyanidation at a grind size of 80% passing 106 µm or lower, with leach recoveries ranging from 82.1–97.5% for gold and 59–84.6% for silver, dependent on leach feed grade.

Overall plant recoveries for gold are predicted to range between 89.5 and 94.9% for head grades of 3.3 to 17.4 g/t Au respectively over the life of mine. Overall plant recoveries for silver are predicted to range between 62.7 and 80.4% for head grades of 5.5 to 17.9 g/t Ag respectively over the life of mine.

Cyanide destruction tests achieved <0.2 mg/L CN_{WAD}, which is well within the maximum legislated value in Oregon of 30 mg/L.

Mercury grades were in the range of 1.86–2.64 g/t in the leach feed, and the concentration of mercury in solution after leaching ranged between 0.08 and 0.26 mg/L. A retort and gas collection and scrubbing system was incorporated into the plant design to manage and control mercury in the process. Arsenic is present in the feed at concentrations ranging between 119 and 183 ppm and is not expected to be problematic in processing.

13.7 Summary Statement

The QP experienced no limitations with respect to the development of the mineral processing and metallurgical testing for the Grassy Mountain Project. The recoveries and process data developed support the process plant design described in Section 17 and the process operating capital and operating costs described in Section 21.

14 MINERAL RESOURCE ESTIMATES

14.1 Introduction

The Mineral Resource estimates were completed under the supervision of Michael M. Gustin, CPG, of MDA.

14.2 Grassy Mountain Project Data

Mineral Resources were estimated using data generated by Paramount and the historical operators discussed in Section 10. These data provided to MDA by Paramount.

14.2.1 Drill-Hole Database

The drill-hole data are in UTM Zone 11 NAD83 coordinates in US Feet. The database includes information from a total of 485 drill holes, 282 of which were drilled in the area of the Grassy Mountain resources. A total of 256 of these holes contribute assay data that are directly used in the estimation of the Project resources.

Paramount provided MDA with a Project drill-hole database prior to the 2016–2017 drilling program. As discussed in Section 12.1, MDA audited these historical drill data and made corrections to the database as appropriate. MDA then periodically updated the database with the information acquired during Paramount's drilling programs, including gold and silver assay data received directly from the analytical laboratory.

14.2.2 Topography

As part of Paramount's 2016–2017 work program, a drone aerial survey was conducted over the resource area and detailed topographic data were collected. MDA used the raw data from this survey to create a three-dimensional digital topographic surface for use in resource modeling.

14.3 Deposit Geology Relevant to Resource Modeling

The Grassy Mountain gold-silver deposit is hosted by arkoses, siltstones, mudstones, and sinters of the Grassy Mountain Formation. As presently drilled, it has extents of 1,900 ft in the strike direction of the higher-grade mineralization (060° to 070°), approximately 2,700 ft perpendicular to the strike, and 1,240 ft in the vertical direction. The deposit is comprised of a central core zone characterized by gold grades in excess of 0.03 oz/ton Au that lies within a broad envelope of lower-grade mineralization. The central core includes the mineralization that is the subject of the economic analysis of the 2020 FS.

The central core zone has extents of almost 1,000 ft along strike, about 450 ft perpendicular to strike, and up to 450 ft in the vertical direction. Sub-horizontal and subvertical extensions of the higher-grade central-core mineralization extend outward into the lower-grade envelope, likely due to stratigraphic and structural controls, respectively. The base of the central core is very sharp, marked by a distinct drop in the precious-metal grades, and it is the lower limit of the strong silicification that typifies the entire Grassy Mountain deposit (including the lower-grade envelope).

High-grade mineralization (>~0.25 oz/ton Au) within the central core zone and its stratigraphic and structural extensions is most frequently associated with thin (<2 inches), often banded, typically steeply-dipping chalcedonic quartz + adularia veins/veinlets, although it is important to note that there are examples of high-grade mineralization that have no obvious association with veins, and the

presence of veins does not guarantee high grades. The distribution of high-grade mineralization is somewhat erratic, but some systematics to its distribution are evident. For example, the high-grade mineralization is characteristic of the basal portion of the central core, even as continuity remains somewhat limited. In addition, the Grassy fault has also long been hypothesized as playing a pivotal role in the formation of the deposit, and there is evidence of an association of this and other high-angle structural zones with increases in vein density and grades.

Stratigraphic control of mineralization is expressed by lenses of more-or-less concordant mineralization that extend outwards from the margins of both the central core of higher-grade mineralization and its lower-grade envelope. Similar mineralized lenses are associated with the upper portions of the mineralized structural zones as they extend above the central core zone. There are also indications that mineralization within the central core of the deposit may have been influenced by the host stratigraphy as well. While arkose and siltstone are the most common hosts of stratigraphically controlled mineralization, both sides of the contacts of these interbedded units seem particularly favorable.

MDA believes the Grassy Mountain gold- and silver-bearing hydrothermal fluids were introduced into the Grassy Mountain Formation along a series of 060°- to 070°-striking, steeply-dipping (primarily to the southeast) structural zones, of often minimal displacement, that occur over the full extents of the central core of the deposit. The planar base of this zone and its abrupt change to weakly mineralized and altered rocks below likely reflect the elevation upon which boiling initiated in the ascending hydrothermal fluids and high-grade mineralization was deposited. The unfocused nature of fluid flow along the many, and sometimes ill-defined, structural zones resulted in the generally erratic deposition of high-grade mineralization throughout the central core zone.

The waning stages of the mineralizing system appear to be manifested by what Newmont named “clay matrix breccias”. These breccias are primarily, if not entirely, post-mineral and post-silicification. They are primarily matrix-supported breccias with rotated fragments (some with mineralized quartz veinlets) that range up to boulder-size. Newmont suggested that the breccias formed during, “a period of late-stage boiling along pre-existing conduits as H₂S and CO₂ were expelled from the system” (Jory, 1993). Close inspection of Paramount drill core suggests that the pre-existing conduits are indeed the mineralized structural zones described above. Due to their frequently unconsolidated nature, the clay matrix breccias have geotechnical implications.

Post-mineral faulting has resulted in a slight tilting of the Grassy Mountain deposit and its host stratigraphy to the east.

It is within this context of geology that the gold and silver resource modeling was undertaken.

14.4 Geologic Modeling

Paramount supplied MDA with a set of detailed cross-sectional lithological and structural interpretations that cover most of the extent of the Grassy Mountain deposit. These cross-sections were used as the base for MDA's modeling of the gold and silver mineralization.

The structural interpretations were particularly to the gold and silver mineral-domain modeling discussed in Section 14.7. MDA made minor modifications to Paramount's structural interpretations and also modeled some additional structures.

14.5 Water Table and Oxidation Modeling

Oxidation within the Grassy Mountain deposit is quite variable, making accurate modeling of discrete oxide and/or unoxidized zones impracticable. The entire deposit is best characterized as being within a mixed zone (oxidized + partially oxidized + unoxidized), with unoxidized portions typically occurring only on a very local basis.

Hydrologic conditions are discussed in Section 16.10. Other than potential impacts of down-hole contamination in the RC drill holes (discussed in Section 10.4), the presence or absence of groundwater did not impact the resource modeling.

14.6 Density Modeling

In 1990, Hazen completed 314 determinations of bulk density and Atlas completed 61 determinations. The Hazen determinations were done by the water-immersion method on samples of drill core; it is not known if samples with open spaces were coated as part of the testing. The samples were identified by gold grade ranges, but the specific drill intervals tested are not known. The Hazen densities (tonnage factors: ft³/ton) are summarized in Table 14-1.

Table 14-1: Hazen Research, Inc. Tonnage Factors

Zone	Mean	Median	Min	Max	Count	Grade Range (oz/ton Au)
OZ-1	12.8	12.8	13.7	12.3	63	<0.005
OZ-2	12.8	12.8	14.4	12.3	166	0.003–0.050
OZ-3	13.1	13.0	24.6	11.0	85	0.050–0.750

The Atlas determinations were completed at Atlas’ Gold Bar mine in Nevada and are described as being “wet tests” (Steele, 1990). The same internal Atlas memorandum describes the Hazen method as “wet and dry”. It can be inferred from this that the Atlas tests were done using the water-displacement method, but this is uncertain. The drill-core samples tested by Atlas are identified by drill interval and therefore can be spatially located within the deposit.

Newmont completed density testing of 10 samples of drill core (Jory, 1993). Although the test results are not available, Jory stated the results suggest, “a Grassy Mountain tonnage factor closer to 13.3 ft³/ton”.

Paramount requested ALS complete bulk-density testing on 266 samples of core from the Atlas, Calico, and Newmont drilling programs, in addition to 374 determinations on core from Paramount’s 2016–2017 drill program. The determinations were done by the water-immersion method (ALS codes OA-GRA08), coating with paraffin wax when necessary (OA-GRA08A). Two of the sinter determinations are anomalously high (low tonnage factors) and were removed from the dataset.

The density data collected by Atlas and Paramount were examined collectively and individually by rock types and gold domains modeled as part of the resource estimation. In general, average tonnage factors from the Atlas data for the lithological and grade subgroups are slightly lower (higher density) than those from the Paramount determinations. The combined Atlas and Paramount dataset grouped by modeled gold domain is summarized in Table 14-2. Domain 100 is the low-grade gold domain (~0.006 to ~0.030 oz/ton Au) modeled by MDA and the higher-grade mineralization is within Domain 200 (> ~0.030 oz/ton Au).

Table 14-2: Combined Atlas and Paramount Tonnage Factors

Gold Domain	Mean	Median	Min	Max	Count	Block Model
100	13.3	13.0	21.5	11.6	341	13.5
200	13.0	12.9	14.7	12.4	275	13.5
100+200	13.2	12.9	21.5	11.6	616	n/a
0	14.8	14.5	23.0	11.2	83	14.8

Inclusive of the Hazen tests, the results suggest that the Grassy Mountain mineralization has a consistent density, while unmineralized rocks are distinctly lighter. This is likely a reflection of alteration, as mineralization of all grades is strongly silicified, while unmineralized portions of the host rocks are generally far less silicified, if at all.

The block model tonnage factors shown in Table 14-2 were used in resource estimation. The model tonnage factors are higher than the measured core to account for unmeasurable open spaces related to the relatively high degree of fracturing that characterizes the Grassy Mountain deposit.

14.7 Gold and Silver Modeling

14.7.1 Mineral Domains

A mineral domain encompasses a volume that ideally is characterized by a single, natural, grade population of a metal or metals that occurs within a specific geologic environment. In order to define the mineral domains at Grassy Mountain, the natural gold and silver populations were first identified on population-distribution graphs that plot the gold- and silver-grade distributions of all of the drill-hole assays, as well as distribution plots using only analyses from core samples. This analysis led to the identification of 3 populations for both gold and silver. Ideally, each of these populations can then be correlated with specific geologic characteristics that are captured in the project database, which can be used in conjunction with the grade populations to interpret the bounds of each of the gold and silver mineral domains. In the case of Grassy Mountain, the high-grade population of gold (>~0.25 oz/ton Au) and silver (>~0.4 oz/ton Ag) do not have sufficient continuity for confident modeling of the domains, and therefore these populations were not explicitly modeled. The approximate grade ranges of the lower-grade (domain 100) and higher-grade (domain 200) domains that were modeled for gold and silver are listed in Table 14-3.

Table 14-3: Approximate Grade Ranges of Gold and Silver Domains

Domain	oz/ton Au	oz/ton Ag
100	~0.006 to ~0.03	~0.04 to ~0.15
200	> ~0.03	> ~0.15

The gold and silver mineralization was modeled by first interpreting gold and silver mineral-domain polygons individually on a set of vertical, 50-ft spaced, northeast-looking (070°) cross sections that span the extent of the deposit. The mineral domains were interpreted using the gold and silver drill-hole assay data and associated alteration and mineralization codes, as well as sectional lithological and structural interpretations by Paramount. Core photographs were also referred to extensively during the sectional modeling. This information was used to discern the stratigraphic and structural controls of the mineralization discussed in Section 14.3 and to model the domains accordingly. Gold was modeled first, and the sectional gold-domain polygons were then used as guides for defining the silver domains.

The inherent variability of the Grassy Mountain mineralization resulted in the need for including significant quantities of lower-grade mineralization within some volumes of the higher-grade domain (domain 200). This variability also precluded confident modeling of the highest-grade population of gold and silver, which therefore was also encompassed within the 200 domains of gold and silver. The highest-grade gold population ($> \sim 0.25$ oz/ton Au) is perhaps the most readily identifiable grade population in drill core, as it strongly correlated with the presence of thin, often banded, quartz–chalcedony veins–veinlets and/or breccias (and sometimes visible gold) that in certain portions of the higher-grade domain correlate well with highest grades. Taking drill-hole orientations and angles to core axes into account, the high-grade veinlets are most commonly steeply dipping.


The boundary between the lower- and higher-grade domains was largely determined by grade. Although the grade change across this domain boundary is usually sharp, it is locally gradational. The grade change across the sub-horizontal base of the higher-grade domain is usually quite sharp, especially in core holes, and it can be marked by a significant decrease in the intensity of silicification. This basal contact of domain 200 is likely indicative of the elevation of the initiation of boiling in the Grassy Mountain hydrothermal system.

The mineralization captured within the lower-grade domain (domain 100) is much less variable than the higher-grade mineralization. This mineralization is distal from the zone of boiling and related brecciation, and its distribution exhibits strong effects from stratigraphic controls.

The cross-sectional gold and silver mineral-domain envelopes were sliced at 10-ft vertical intervals that match the mid-bench elevations of the block model. The slices were then used to create a new set of mineral-domain polygons for both gold and silver on level plans at 10-ft spacings in order to rectify the domain interpretations to the drill-hole data at the scale of the block model.

Cross-sections showing examples of the gold and silver mineral domains in the central portion of the Grassy Mountain deposit are shown in Figure 14-1 to Figure 14-4.

Figure 14-1: Cross Section 3050 Showing Gold Domains

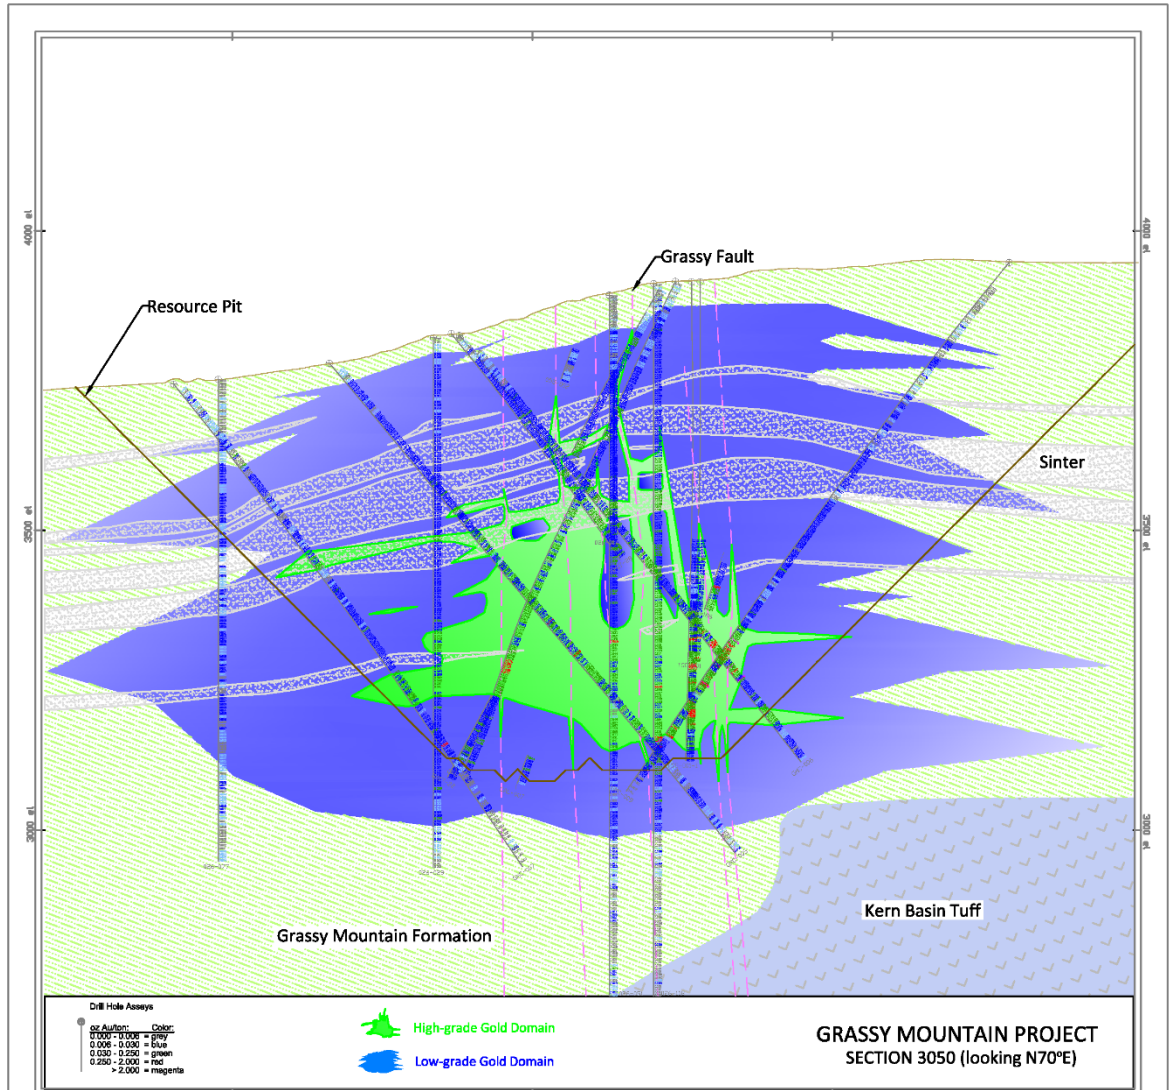

See Figure 10.2 for section location through the Grassy Mountain deposit

CLIENT



PROJECT

GRASSY MOUNTAIN GOLD PROJECT
MALHEUR COUNTY, OREGON, USA

CONSULTANT




TITLE

Cross Section Showing Geology and Gold Domains

COORDINATE SYSTEM:


MM-DD-YYYY: April-03-2020

Figure 14-2: Cross Section 3050 Showing Silver Domains

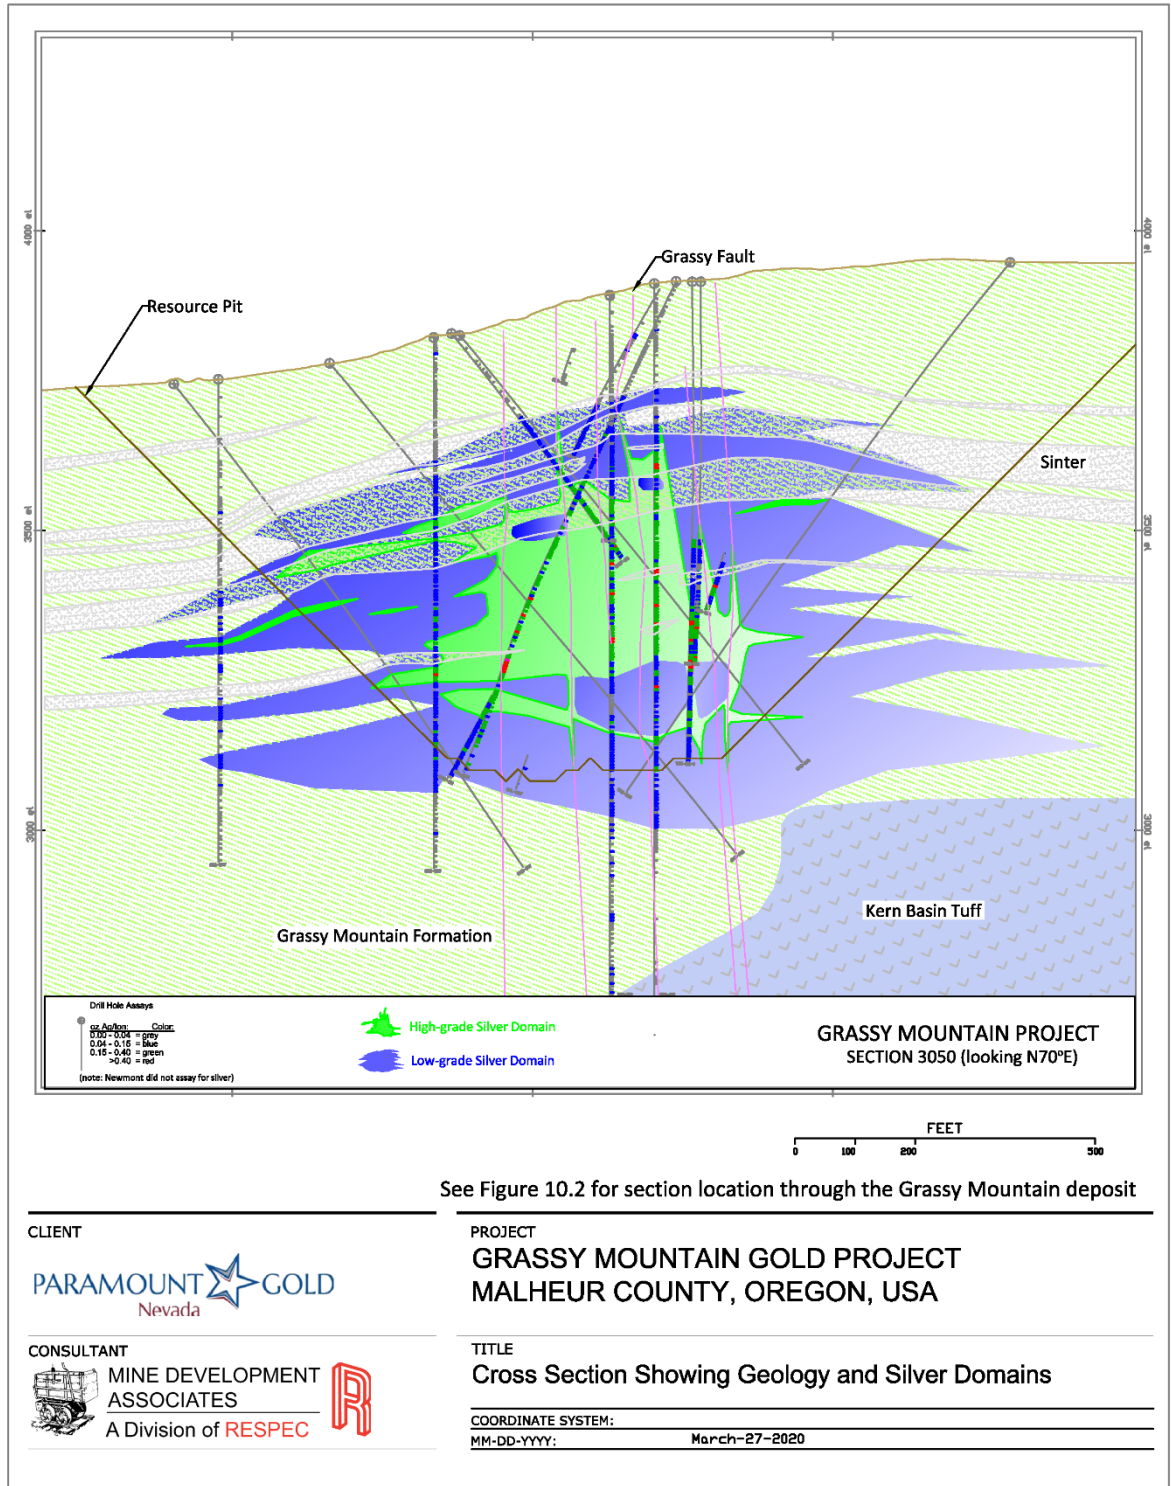

Note: Newmont drill holes lack silver assays

Figure 14-3: Cross Section 3250 Showing Gold Domains

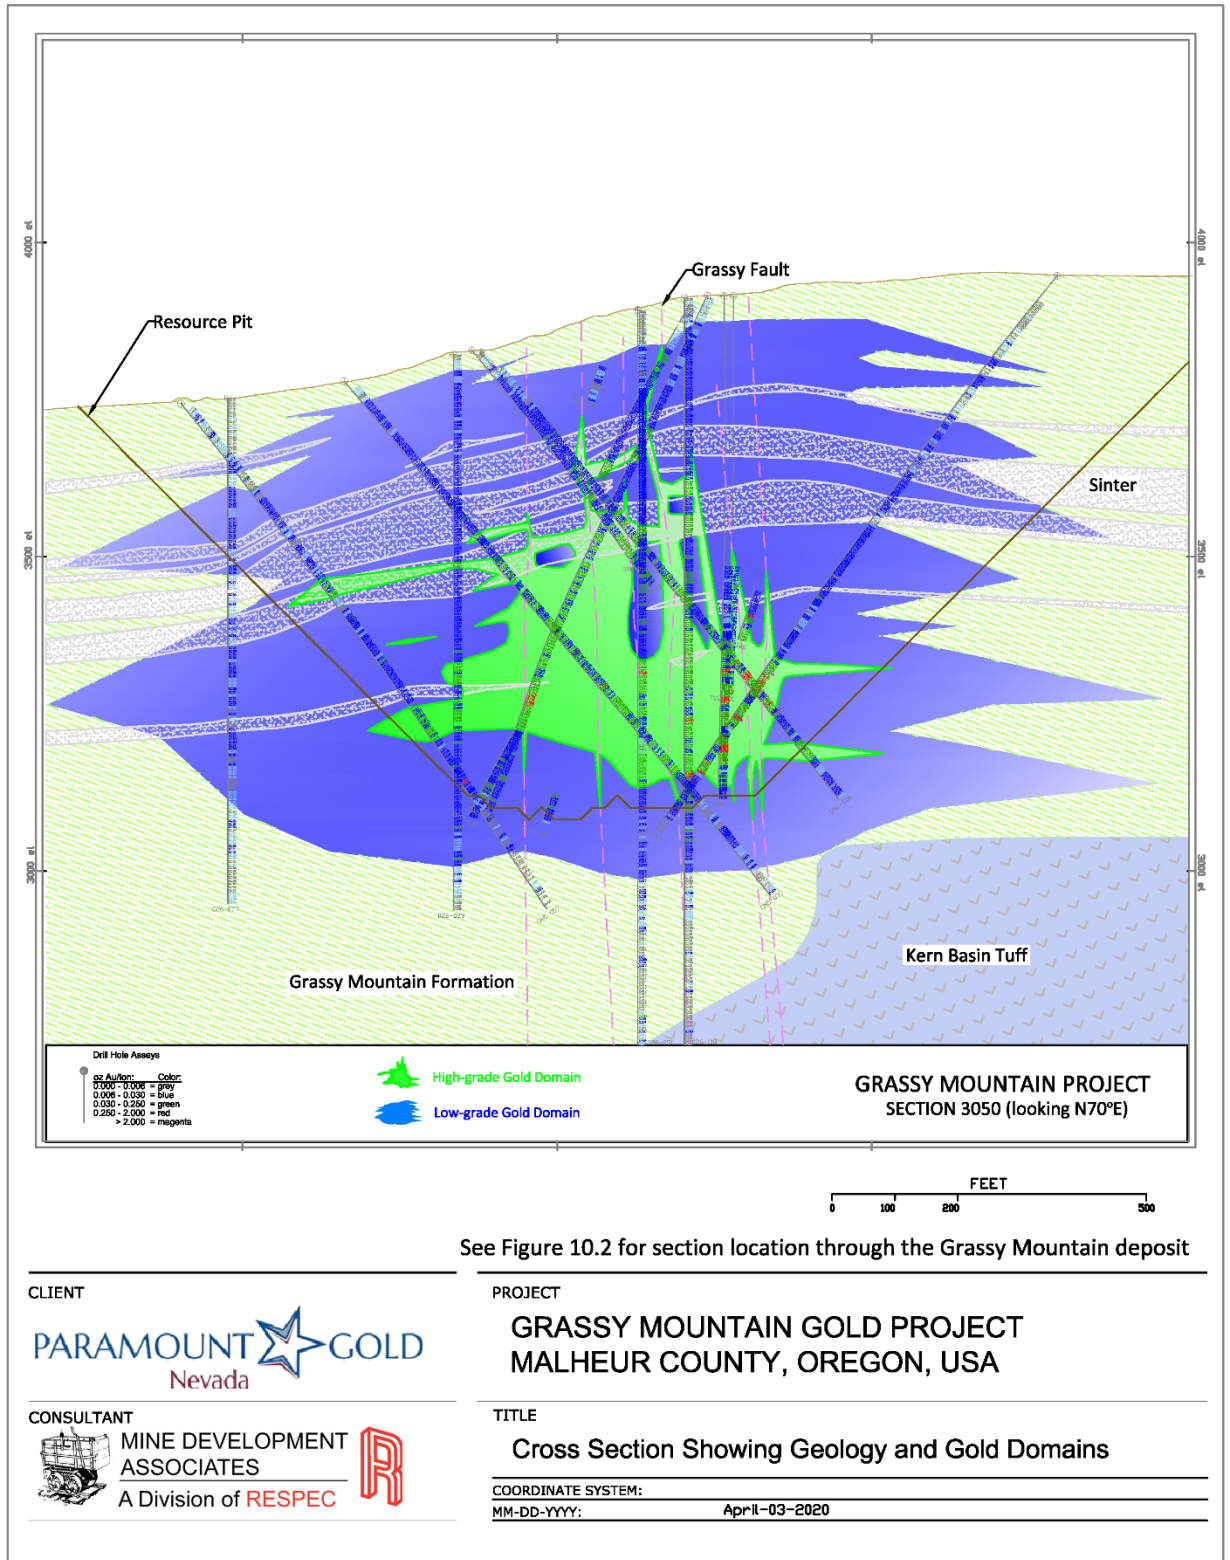

See Figure 10.2 for section location through the Grassy Mountain deposit

CLIENT



PROJECT

GRASSY MOUNTAIN GOLD PROJECT
MALHEUR COUNTY, OREGON, USA

CONSULTANT




TITLE

Cross Section Showing Geology and Gold Domains

COORDINATE SYSTEM:

MM-DD-YYYY: April-03-2020

Figure 14-4: Cross Section 3250 Showing Silver Domains

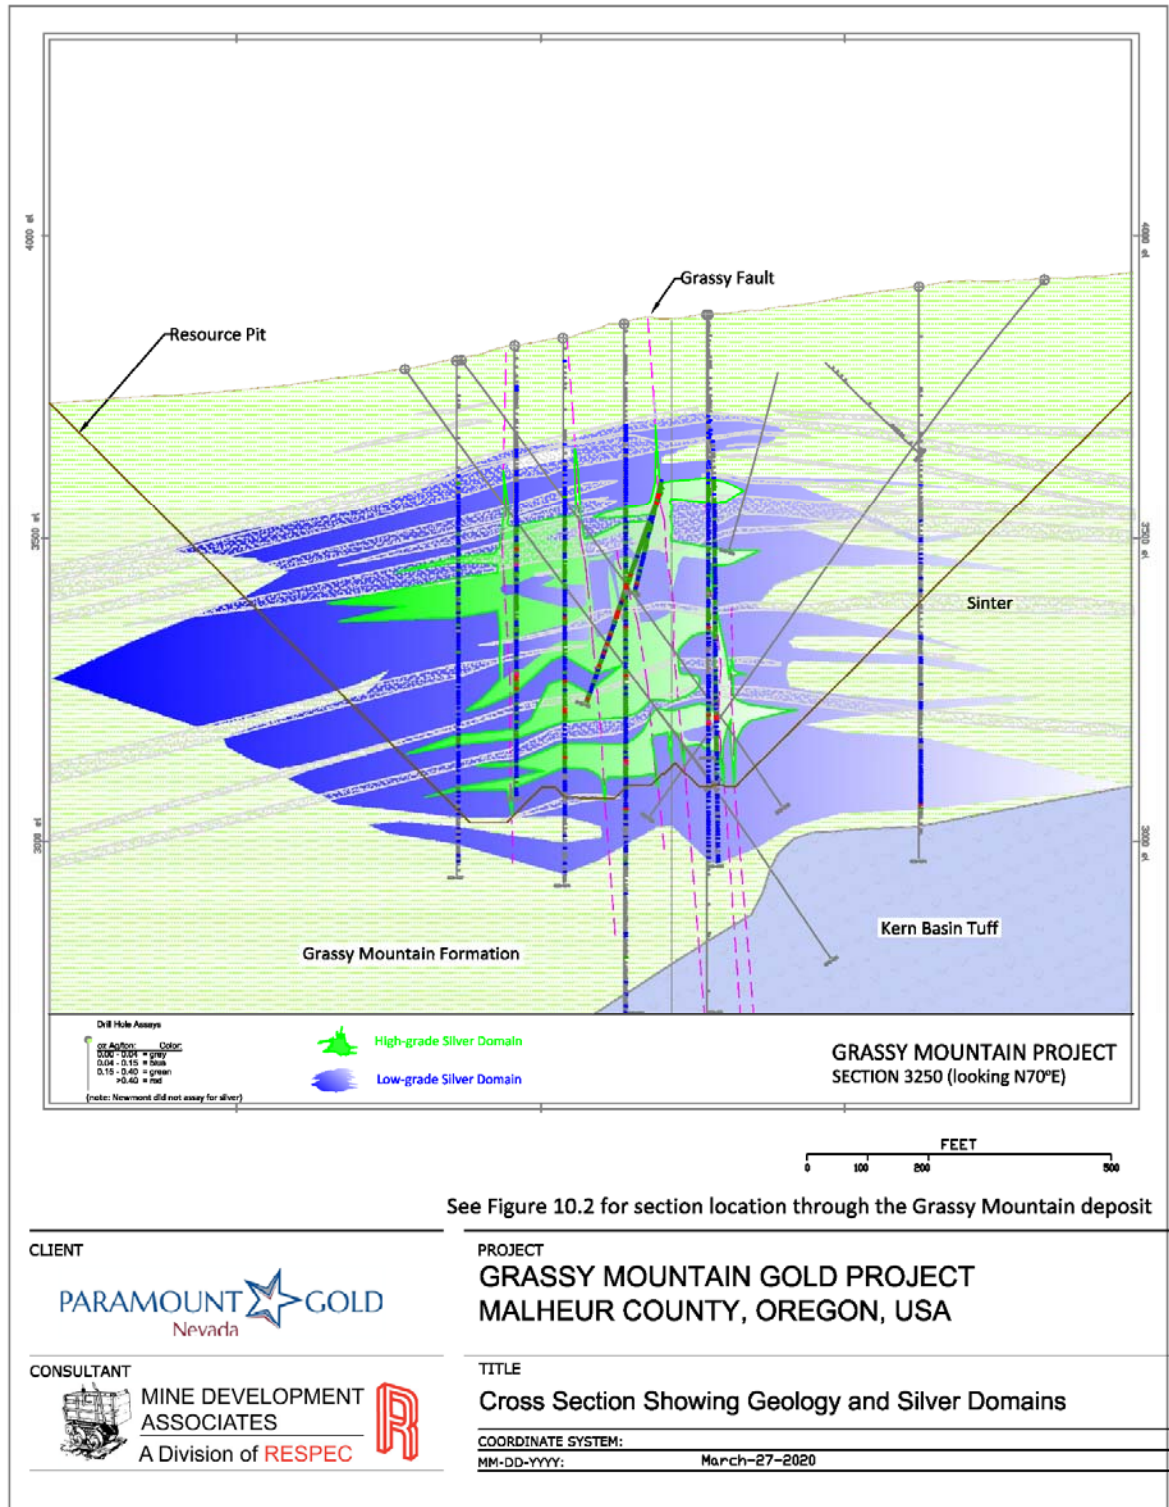

Note: Newmont drill holes lack silver assays

14.7.2 Assay Coding, Capping, and Compositing

Drill-hole gold and silver assays were coded to the gold and silver mineral domains, respectively, using the cross-sectional polygons. Assay caps were determined by the inspection of population distribution plots of the coded assays, by domain, to identify high-grade outliers that might be appropriate for capping. The plots were also evaluated for the possible presence of multiple grade populations within each of the gold domains. Descriptive statistics of the coded assays by domain and visual reviews of the spatial relationships of the possible outliers, and their potential impacts during grade interpolation, were also considered in the definition of the assay caps (shown in Table 14-4).

Table 14-4: Grassy Mountain Gold and Silver Assay Caps by Domain

Domain	oz/ton Au	Number Capped (% of samples)	oz/ton Ag	Number Capped (% of samples)
0	0.090	8 (<1%)	0.120	12 (<1%)
100	0.300	3 (<1%)	0.600	4 (<1%)
200	10.000	4 (<1%)	7.000	2 (<1%)

Each model block was coded to the volume percentage of each of the 2 domains for both gold and silver, as discussed below. For model blocks that are not entirely coded to the lower- and higher-grade domains for either or both metals, these outside-domain volumes of the blocks (assigned as “domain 0”) were also estimated using assays lying outside of the domains (uncoded, domain 0 assays). The domain 0 assays used in this dilutionary estimate were also capped as shown in Table 14-4.

In addition to the assay caps, restrictions on the search distances of higher-grade portions of some of the domains were applied during grade interpolations. The use of search restrictions minimizes the number of samples subjected to capping while properly respecting the highest-grade populations within each domain.

Descriptive statistics of the capped and uncapped coded assays are provided in Table 14-5 and Table 14-6 for gold and silver, respectively.

Table 14-5: Descriptive Statistics of Grassy Mountain Coded Gold Assays

Domains	Assays	Count	Mean (oz/ton Au)	Median (oz/ton Au)	Std. Dev.	CV	Min (oz/ton Au)	Max (oz/ton Au)
0	Au	23,361	0.002	0.001	0.007	3.45	0.000	0.732
	Au Cap	23,361	0.002	0.001	0.004	2.15	0.000	0.090
100	Au	24,808	0.013	0.011	0.011	0.82	0.000	0.561
	Au Cap	24,808	0.013	0.011	0.010	0.77	0.000	0.300
200	Au	7,523	0.108	0.044	0.441	4.09	0.000	21.698
	Au Cap	7,523	0.107	0.044	0.405	3.79	0.000	10.000
100+200	Au	32,331	0.033	0.013	0.209	6.27	0.000	21.698
	Au Cap	32,331	0.033	0.013	0.193	5.81	0.000	10.000

Table 14-6: Descriptive Statistics of Grassy Mountain Coded Silver Assays

Domains	Assays	Count	Mean (oz/ton Ag)	Median (oz/ton Ag)	Std. Dev.	CV	Min (oz/ton Ag)	Max (oz/ton Ag)
0	Ag	20,921	0.009	0.005	0.011	1.19	0.000	0.496
	Ag Cap	20,921	0.009	0.005	0.010	1.11	0.000	0.120
100	Ag	13,292	0.071	0.064	0.040	0.57	0.003	1.138
	Ag Cap	13,292	0.071	0.064	0.039	0.55	0.003	0.600
200	Ag	6,646	0.262	0.200	0.400	1.52	0.005	18.600
	Ag Cap	6,646	0.260	0.200	0.310	1.19	0.005	7.000
100+200	Ag	19,938	0.132	0.085	0.246	1.86	0.003	18.600
	Ag Cap	19,938	0.131	0.085	0.199	1.51	0.003	7.000

The capped assays were composited at 5 ft down-hole intervals respecting the mineral domains. The 5 ft composite length is equal to the sample length of RC drill samples, which means that the RC sample data are effectively not composited at all, while core intervals shorter than 5 ft are composited. This minimal compositing was deliberately chosen as part of an effort to retain some of the inherent variability of the Grassy Mountain mineralization in the resource modeling. Descriptive statistics of Grassy Mountain composites are shown in Table 14-7 and Table 14-8 for gold and silver, respectively.

Table 14-7: Descriptive Statistics of Grassy Mountain Gold Composites

Domain	Count	Mean (oz/ton Au)	Median (oz/ton Au)	Std. Dev.	CV	Min (oz/ton Au)	Max (oz/ton Au)
0	23,452	0.00	0.00	0.00	2.15	0.00	0.09
100	24,213	0.01	0.01	0.01	0.74	0.00	0.30
200	6,738	0.11	0.05	0.35	3.30	0.00	9.89
100+200	30,951	0.03	0.01	0.17	5.09	0.00	9.89

Table 14-8: Descriptive Statistics of Grassy Mountain Silver Composites

Domain	Count	Mean (oz/ton Ag)	Median (oz/ton Ag)	Std. Dev.	CV	Min (oz/ton Ag)	Max (oz/ton Ag)
0	20,910	0.009	0.005	0.010	1.100	0.000	0.120
100	12,985	0.071	0.067	0.038	0.530	0.003	0.600
200	6,137	0.260	0.200	0.295	1.140	0.005	7.000
100+200	19,122	0.131	0.085	0.191	1.460	0.003	7.000

14.7.3 Block Model Coding

The level-plan mineral-domain polygons were used to code a three-dimensional block model with a model bearing of 340° that is comprised of 5 x 10 x 10-ft blocks (model x, y, z). The block size was chosen in consideration of the underground mining scenario evaluated in this FS. The volume percent of each mineral domain for both gold and silver is stored within each block (referred to as the partial percentages). The block model was also coded using the digital topographic surface described in Section 14.2.2.

The bulk density values discussed in Section 14.6 were assigned to model blocks, so that blocks coded as having with any partial percentage of gold or silver have a density of 13.5 ft³/ton and all other blocks are assigned a value of 14.8 ft³/ton.

14.7.4 Grade Interpolation

The parameters applied to the gold-grade estimations at Grassy Mountain are summarized in Table 14-9. Grade interpolation was completed in 3 passes using length-weighted composites.

Due to the varying effects of subvertical structural controls and sub-horizontal lithological controls, the modeled mineralization has a number of orientations throughout the deposit. The block model was therefore coded to 2 unique estimation areas (areas 10 and 20). Estimation area 10 encompasses most of the Grassy Mountain deposit and is characterized by shallow dips of the stratigraphic host rocks of up to about -15°. Estimation area 20 is comprised of only the west-southwesternmost portion of the deposit where the dips of the stratigraphic units steepen to approximately -20°. As shown in Table 14-9, the lower-grade gold and silver domains, as well as domain 0, were entirely estimated using search ellipses that reflect these stratigraphic orientations.

The higher-grade gold and silver domains exhibit both sub-horizontal (stratigraphic) and high-angle (structural) controls. In order to prioritize the estimation of the highest-grade mineralization, which is most commonly associated with steeply dipping veinlets, the estimation of the higher-grade domain was initiated to reflect high-angle structural control (Table 14-9; estimation area 10, domain 200, pass 1).

Table 14-9: Estimation Parameters

Estimation Pass – Au + Ag Domain	Search Ranges (ft)			Composite Constraints		
	Major	Semi-Major	Minor	Min	Max	Max/Hole
Pass 1 - Domain 0 + 100	100	100	50	2	15	3
Pass 2 - Domain 0 + 100	200	200	100	2	15	3
Pass 3 - Domain 0 + 100	310	310	310	1	15	3
Pass 1 + 2 - Domain 200	50	50	16.7	2	15	3
Pass 3 - Domain 200	110	110	110	1	15	3
Restrictions on Search Ranges						
Domain	Grade Threshold	Search Restriction Distance		Estimation Pass		
Au 200	>0.30 oz/ton Au	35ft		2		
Au 0	>0.01 oz/ton Au	30ft		1, 2, 3		
Ag 0	>0.04 oz/ton Ag	30ft		1, 2, 3		

Search Ellipse Orientations

Estimation Area	Au + Ag Domains and Controls	Major Bearing	Plunge	Tilt	Estimation Pass
10 [most of the deposit]	Domain 0 + 100 –	0°	0°	-15°	1, 2, 3
	Domain 200 – structural	070°	0°	-85°	1
	Domain 200 – stratigraphic	070°	-10°	0°	2
	Domain 200 – stratigraphic	0°	0°	0°	3
20 [WSW end of the deposit]	Domain 0 + 100 + 200 – stratigraphic	070°	0°	20°	1, 2, 3

The second estimation pass of the higher-grade domain invoked a search ellipse reflective of stratigraphic control while using the same search distance as pass 1 (50 ft). The third and final estimation pass was an isotropic pass, i.e. without either a structural or stratigraphic bias, and was used to estimate domain 200 grades into blocks that were not estimated by the first two passes, which are largely limited to the outer extents of the domain.

Only a very limited portion of the higher-grade gold and silver domains lie in estimation area 20.

Statistical analyses of coded assays and composites, including coefficients of variation and population-distribution plots, indicate that multiple populations of significance were captured in the higher-grade domain (domain 200) of both gold and silver. This recognition of multiple populations within the higher-grade domains, which lack sufficient continuity to be explicitly modeled as separate domains, coupled with the results of initial grade-estimation runs that indicated the higher-grade samples were affecting inappropriate volumes in the model, led to the restrictions on the search distances for higher-grade populations within some domains. These restrictions place limits on the maximum distances from a block that the highest-grade composites can be used in the interpolation of gold and silver grade into that block. The final search-restriction parameters were derived from the results of multiple interpolation iterations that employed various search-restriction parameters.

Gold and silver grades were interpolated using inverse-distance to the third power (ID3), ordinary-kriging (OK), and nearest-neighbor (NN) methods. The Mineral Resources were estimated using ID3 interpolation, as this method led to results that were judged to more closely approximate the drill data than those obtained by OK. The NN estimation was completed as a check on the ID3 and OK interpolations.

The estimation passes were performed independently for each of the mineral domains, so that only composites coded to a particular domain were used to estimate grade into blocks coded by that domain. The estimated grades were coupled with the partial percentages of the mineral domains and the outside-domain volumes to enable the calculation of weight-averaged gold and silver grades for each block. The final resource grades, and their associated resource tonnages, are therefore fully block-diluted using this methodology.

14.7.5 Model Checks

Gold and silver domain volumes coded into the block model were compared to those derived from the cross-sectional and level-plan mineral domains to assure close agreement, and all block-model coding was checked visually. A polygonal estimate using the cross-sectional domain polygons was used as a check on the ID3 estimation results, as were the NN and OK estimates. No unexpected relationships between the check estimates and the inverse-distance estimate were identified. Various grade-distribution plots of assays, composites, and NN, OK, and ID3 block grades were evaluated as a check on both the global and local estimation results. Finally, the ID3 grades were visually compared to the drill-hole assay data to assure that reasonable results were obtained.

14.8 Grassy Mountain Mineral Resource Estimates

The Grassy Mountain deposit has the potential to be mined by open-pit methods. While the Mineral Reserves discussed in Section 15 are estimated on the basis of a proposed underground-mining scenario, these Mineral Reserves represent a subset of the entire gold-silver deposit. The Mineral Resources were estimated to reflect potential open-pit extraction and milling as the primary scenario (Mineral Resources potentially amenable to open pit mining methods), with potential underground mining of material lying outside of the pit as a secondary scenario (Mineral Resources potentially amenable to underground mining methods). The Mineral Reserves discussed in Section 15 are derived from both resource estimates.

To meet the requirement of reasonable prospects for eventual economic extraction for the portion of the Mineral Resources potentially amenable to open pit mining methods, a pit optimization was run using the parameters summarized in Table 14-10.

Table 14-10: Pit Optimization Parameters

Item	Value	Unit
Mining cost	2.00	\$/ton
Processing cost	13.00	\$/ton processed
Process rate	5,000	tons-per-day processed
General and administrative cost	2.22	\$/ton processed
Au price	1,500	\$/oz
Ag price	20	\$/oz
Au recovery	80	percent
Ag recovery	60	percent
Au refining cost	5.00	\$/oz produced
Ag refining cost	0.50	\$/oz produced

The pit shell created by this optimization was used to constrain the Mineral Resources potentially amenable to open-pit mining methods, with the added constraint of a gold-equivalent cut-off grade of 0.012 oz/ton applied to all model blocks lying within the optimized pit.

The gold equivalent grade (oz/ton AuEq) of each model block was calculated as follows:

- $\text{oz/ton AuEq} = \text{oz/ton Au} + (\text{oz/ton Ag} \div 100)$.

The silver-to-gold equivalency factor of 100 was derived from the metal prices and recoveries in Table 14-10.

Mineral Resources potentially amenable to underground mining methods were estimated by applying a cut-off of 0.060 oz/ton AuEq to blocks lying immediately outside of the optimized pit. Table 14-11 lists the parameters used to calculate the underground cut-off grade.

Table 14-11: Parameters Used to Determine Cutoff Grade for Mineral Resources Potentially Amenable to Underground Mining Methods

Item	Value	Unit
Mining cost	50.00	\$/ton
Processing cost	25.00	\$/ton processed
Process rate	5,000	tons-per-day processed
General and administrative cost	8.00	\$/ton processed
Au price	1,500	\$/oz
Ag price	20	\$/oz
AuEq recovery	90	percent
Refining cost	5.00	\$/oz produced

Both resource estimates are based on a 5,000 ton per day processing rate, with processing assumed to consist of crushing, milling, and first-stage gravity separation followed by carbon-in-leach recovery.

The Mineral Resource estimates are presented in Table 14-12. The portions of the resource estimates considered potentially amenable to open pit and underground mining methods are shown in Table 14-13 and Table 14-14, respectively. Mineral Resources are reported inclusive of the Mineral Resources that have been converted to Mineral Reserves. Mineral Resources that are not Mineral Reserves do not have demonstrated economic viability.

Table 14-12: Grassy Mountain Gold and Silver Resources

Classification	Tons	Grade (oz/ton Au)	Contained Metal (oz Au)	Grade (oz/ton Ag)	Contained Metal (oz Ag)
Measured	18,190,000	0.020	369,000	0.079	1,438,000
Indicated	12,712,000	0.054	691,000	0.146	1,861,000
Measured + Indicated	30,902,000	0.034	1,060,000	0.107	3,299,000
Inferred	1,004,000	0.041	41,000	0.120	120,000

Notes:

1. The Qualified Person for the estimate is Mr. Michael M. Gustin, CPG, of MDA.
2. Mineral Resources comprised all model blocks at a 0.012 oz/ton AuEq cutoff that lie within an optimized pit plus blocks at a 0.060 oz/ton AuEq cutoff that lie outside of the optimized pit.
3. oz/ton AuEq (gold equivalent grade) = oz/ton Au + (oz/ton Ag ÷ 100).
4. Mineral Resources are reported inclusive of those Mineral Resources converted to Mineral Reserves. Mineral Resources that are not Mineral Reserves do not have demonstrated economic viability.
5. Mineral Resources potentially amenable to open pit mining methods are reported using a gold price of US\$1,500/oz, a silver price of US\$20/oz, a throughput rate of 5,000 tons/d, assumed metallurgical recoveries of 80% for Au and 60% for Ag, mining costs of US\$2.00/ton mined, processing costs of US\$13.00/ton processed, general and administrative costs of \$2.22/ton processed, and refining costs of \$5.00/oz Au and \$0.50/oz Ag produced. Mineral Resources potentially amenable to underground mining methods are reported using a gold price of US\$1,500/oz, a silver price of US\$20/oz, a throughput rate of 5,000 tons/d, assumed metallurgical recoveries of 90% gold equivalent, mining costs of US\$50.00/ton mined, processing costs of US\$25.00/ton processed, general and administrative costs of \$8.00/ton processed, and refining costs of \$5.00/oz Au produced.
6. The effective date of the estimate is March 31, 2020;
7. Rounding may result in apparent discrepancies between tons, grade, and contained metal content.

Table 14-13: Grassy Mountain Mineral Resources Potentially Amenable to Open Pit Mining Methods

Classification	Tons	Grade (oz/ton Au)	Contained Metal (oz Au)	Grade (oz/ton Ag)	Contained Metal (oz Ag)
Measured	18,158,000	0.020	366,000	0.079	1,434,000
Indicated	12,651,000	0.054	685,000	0.147	1,854,000
Measured + Indicated	30,809,000	0.034	1,051,000	0.107	3,288,000
Inferred	981,000	0.040	40,000	0.120	118,000

Note: Footnotes to Table 14-12 are also applicable to this table. This table is not additive to Table 14-12.

Table 14-14: Grassy Mountain Mineral Resources Potentially Amenable to Underground Mining Methods

Classification	Tons	Grade (oz/ton Au)	Contained Metal (oz Au)	Grade (oz/ton Ag)	Contained Metal (oz Ag)
Measured	32,000	0.090	3,000	0.125	4,000
Indicated	61,000	0.095	6,000	0.121	7,000
Measured + Indicated	93,000	0.093	9,000	0.122	11,000
Inferred	23,000	0.075	1,700	0.087	2,000

Note: Footnotes to Table 14-12 are also applicable to this table. This table is not additive to Table 14-12.

The Grassy Mountain resource estimates are classified according to the criteria presented in Table 14-15. The parameters of the gold estimation control the resource classification because gold is much more significant than silver from a potential economic standpoint.

Table 14-15: Resource Classification

Class	Criteria	Distance from Nearest Composite
Measured	All estimated blocks with Au Domain 200 coding	≤ 10 ft
	All estimated blocks with Au Domain 100 coding; no Au D200 coding	≤ 50 ft
Indicated	All estimated blocks with Au Domain 200 coding not classified as Measured	≤ 50 ft
	All estimated blocks with Au Domain 100 coding; no Au D200 coding and not classified as Measured	≤ 100 ft
Inferred	All other estimated blocks	

The higher-grade gold is highly variable, while the lower-grade mineralization is much more continuous. In consideration of this, two sets of criteria were used in the classification: one set of more restrictive parameters for all blocks coded as having any percentage of gold domain 200 (the higher-grade domain), and another less restrictive set of criteria for all other blocks coded to the lower-grade gold domain (domain 100).

Although the QP is not expert with respect to any of the following aspects of the Project, the QP is not aware of any unusual environmental, permitting, legal, title, taxation, socio-economic, marketing, political, or other relevant factors not discussed in this Report that could materially affect Mineral Resource estimates as of the effective date of the Report.

Figure 14-5 through Figure 14-8 are cross-sections through the central portion of the Grassy Mountain deposit that show estimated block-model gold and silver grades. These figures correspond to the mineral-domain cross-sections presented in Figure 14-1 to Figure 14-4.

Figure 14-5: Cross Section 3050 Showing Block-Model Gold Grades


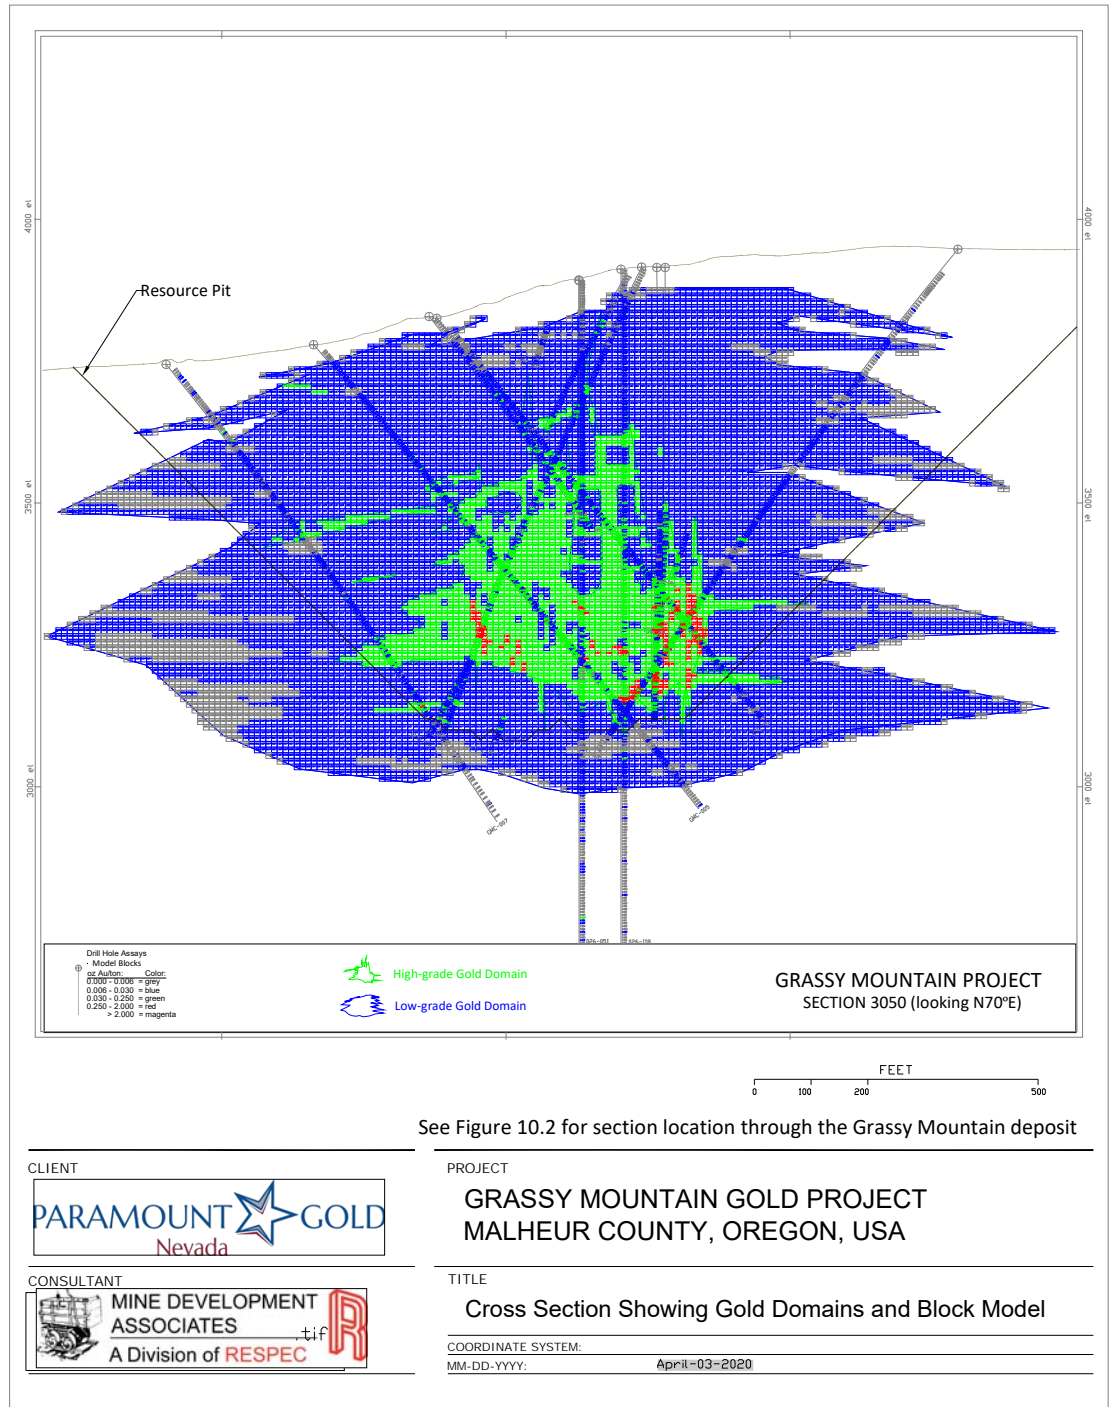


Figure 14-6: Cross Section 3050 Showing Block-Model Silver Grades



See Figure 10.2 for section location through the Grassy Mountain deposit

CLIENT

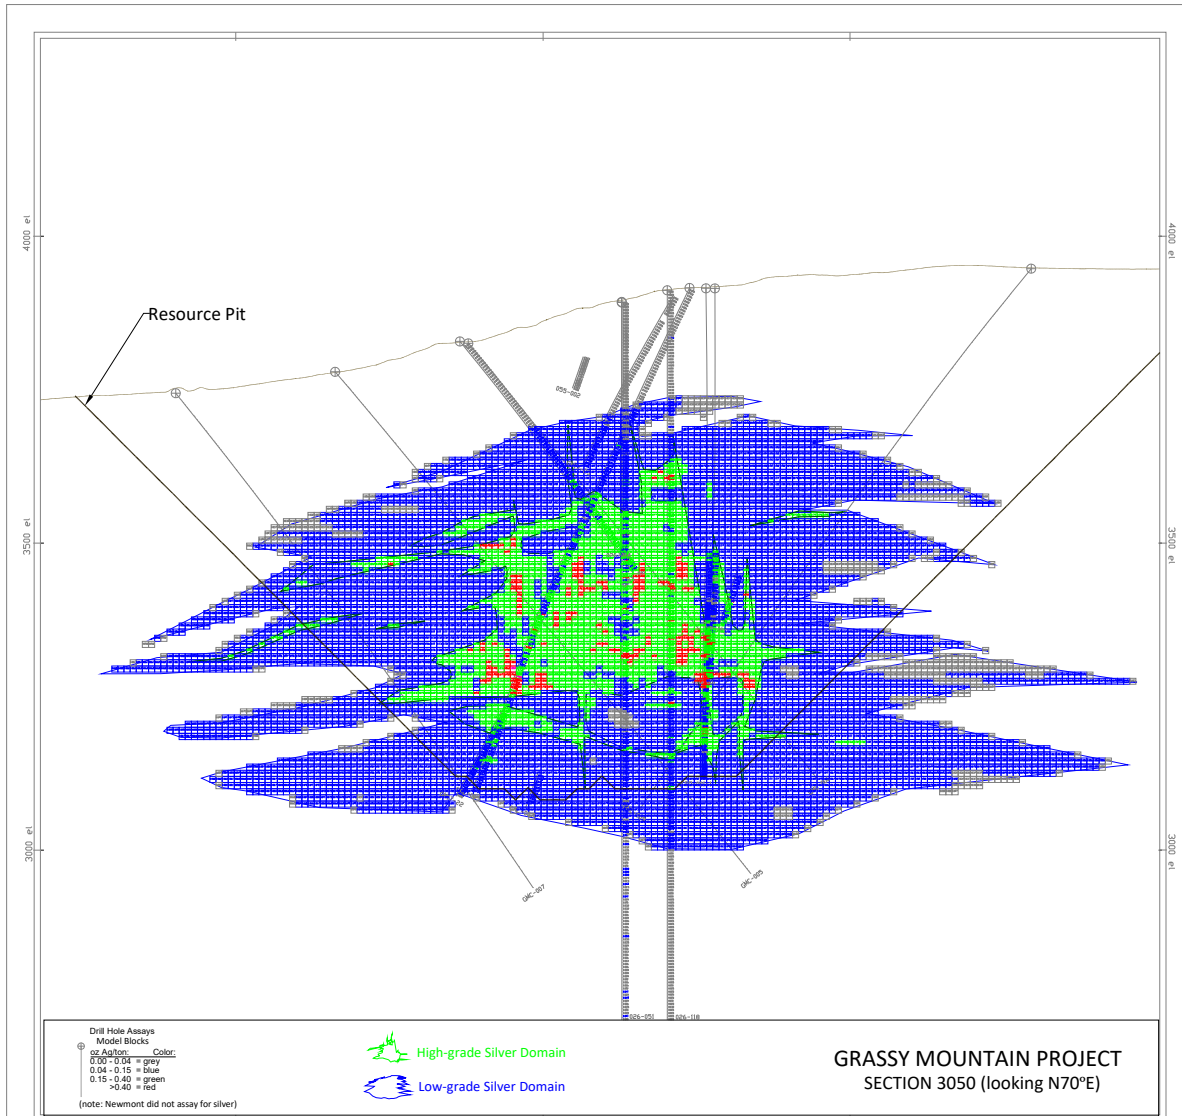

PROJECT

GRASSY MOUNTAIN GOLD PROJECT
MALHEUR COUNTY, OREGON, USA

CONSULTANT




TITLE

Cross Section Showing Silver Domains and Block Model

COORDINATE SYSTEM:

MM-DD-YYYY: March-27-2020

Figure 14-7: Cross Section 3250 Showing Block-Model Gold Grades

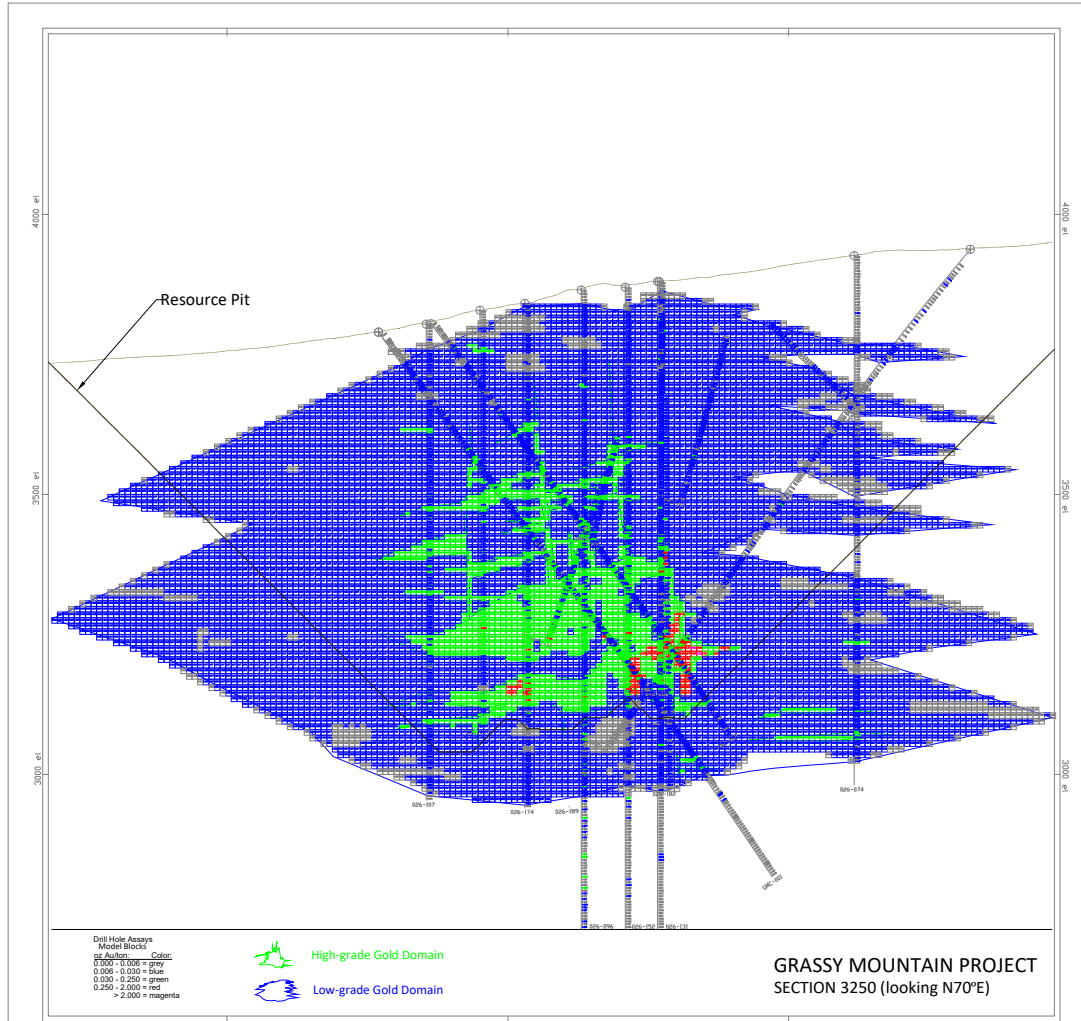

See Figure 10.2 for section location through the Grassy Mountain deposit

CLIENT



PROJECT

GRASSY MOUNTAIN GOLD PROJECT
MALHEUR COUNTY, OREGON, USA

CONSULTANT



TITLE


Cross Section Showing Gold Domains and Block Model

COORDINATE SYSTEM:

MM-DD-YYYY:

March=27=2020

Figure 14-8: Cross Section 3250 Showing Block-Model Silver Grades

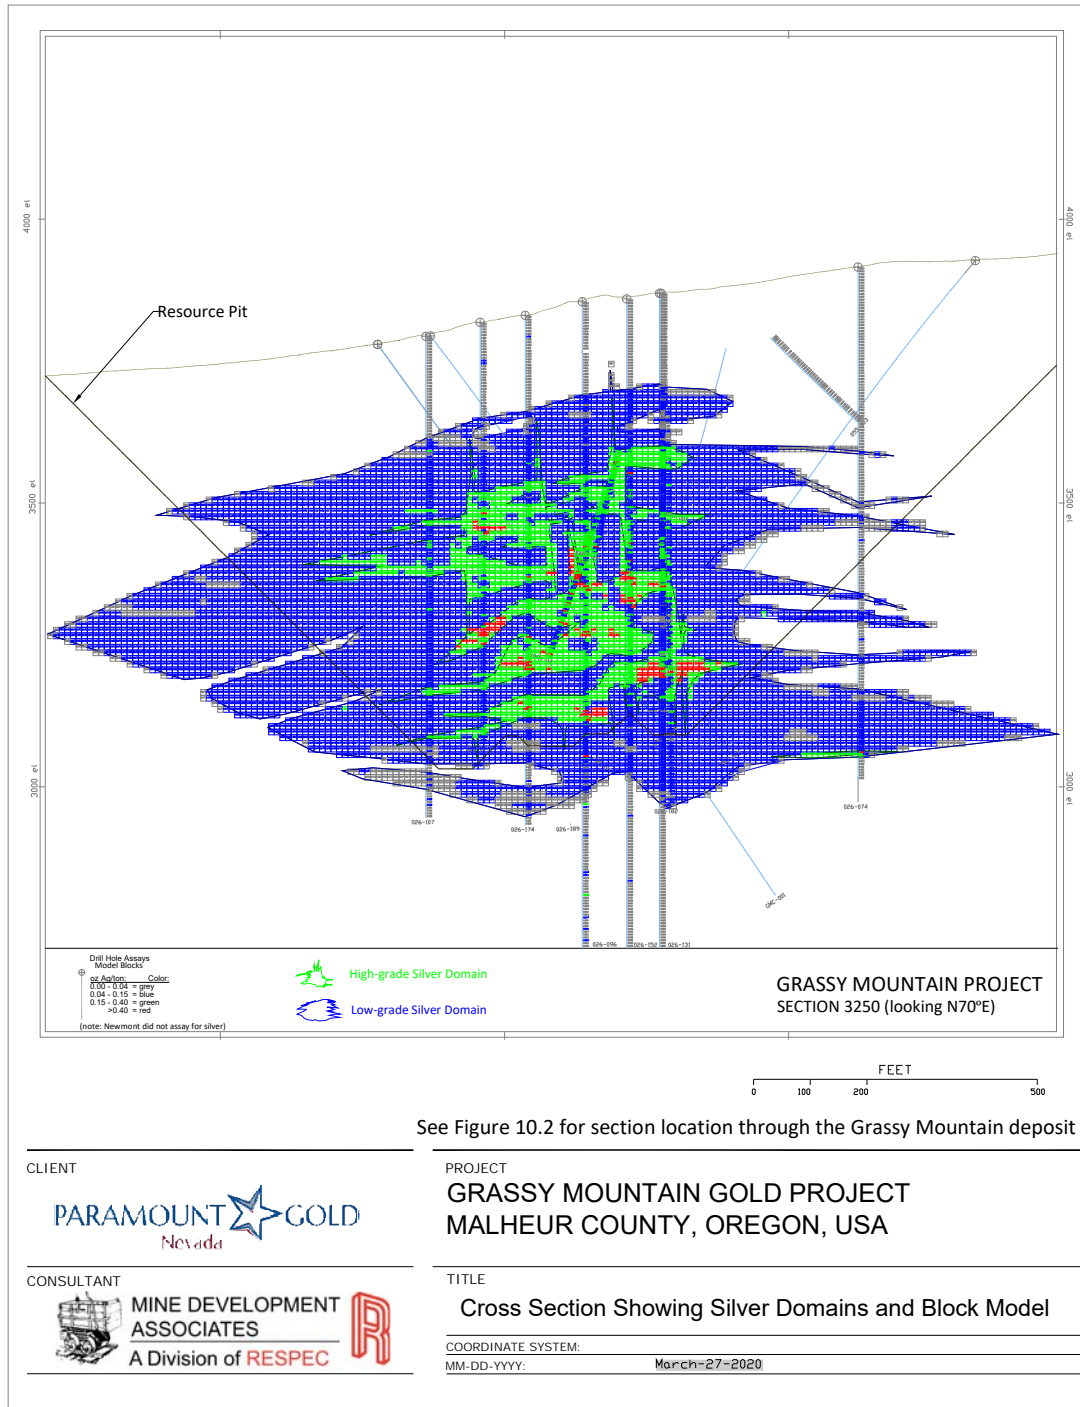

14.9 Comments on the Resource Modeling

The current Grassy Mountain resource estimates were updated from those previously reported in 2018, although the changes are slight. No post-2018 drill-sample assays within the limits of the current Mineral Resources were generated, therefore the underlying data used directly in the estimation of the

current resources remain unchanged from the data used in 2018. The differences between the current resource estimation and the 2018 estimate include (i) the model block size was decreased to 5 x 10 x 10 ft (model x, y, z) versus the 2018 block size of 10 x 10 x 10 ft; and (ii) the search distance of the third estimation pass of the higher-grade domain (domain 200) was increased from 300 ft to 310 ft. The decrease in the model “x” direction was made to better accommodate slope definition in Mineral Reserve estimation, while the 10-ft increase in the search distance was to ensure grades were estimated into a small number of blocks that were not being estimated at the 300-ft search distance. These modifications resulted in non-material changes to the tons, grade, and ounces at the various resource classifications.

A total of 256 drill holes directly contribute assay data to the estimates. Atlas drilled 180 of these holes, and only four of these were inclined and nine were core or core holes pre-collared by RC. This predominance of vertical RC drill holes led all subsequent operators to emphasize angled and core drill holes in their drilling programs. There are now 59 core holes, including 27 drilled by Paramount, and 55 angled holes, including 18 drilled by Paramount, that support the resource estimates, almost all of which were drilled into the area of the central higher-grade core of the deposit.

As a check on the impact of the Paramount drilling program, as well as to aid in the verification of the historical drilling data, the Paramount holes were removed from use in a resource estimate scenario that was otherwise identical to that used to estimate the current resources. On a global basis (no cutoff), the exclusion of the Paramount drill data resulted in a decrease in gold ounces of 0.4%. At various cutoffs from 0.005 to 0.090 oz/ton Au, the highest-magnitude change was a 0.9% decrease in ounces. This constancy in the ounces estimated serves to support the use of historical drilling data used in resource estimation. This does not imply that the Paramount drilling had no impact on the current resource estimates; the Paramount core holes greatly increased the quantity of drill core physically available from which to confirm and update the geologic understanding of the deposit, thereby significantly enhancing the confidence in the resource modeling.

The central higher-grade core of the deposit, which would be critical to the potential economic viability of any mining operation, has predominantly been drilled at spacings of about 30 to 50 ft. Even at this relatively tight drill density, the highest-grade mineralization (>~0.2 oz/ton Au) cannot be confidently correlated from drill hole to drill hole in many cases. This high-grade population therefore could not be explicitly modeled. Although care was taken to properly represent the distribution of the high-grade population in estimation, the locations of these high grades in the resource model likely vary from reality as distances from drill data increase. Closely-spaced drilling will therefore be required in any future underground mining operation. Such drilling should be undertaken prior to mining of any particular sector of the deposit, with the data used to update the operation’s short-term resource model, as well as to create final stope designs for each mining sector.

There is a total of 14,947 sample intervals in the drill-hole database that have gold assays but no silver analyses. In most of these cases, entire drill holes were not assayed for silver. For example, some of the early Atlas holes and none of the Newmont holes were assayed for silver. A total of 4,720 of the sample intervals lacking silver assays lie within the gold domains that form the basis of the resource estimates, while 19,938 sample intervals used in the resource estimates do have silver analyses. The lower quantity of silver analyses is mitigated by the fact that silver would add very little value relative to gold in any potential mining operation.

Structural zones are interpreted to be one of the principal controls of high-grade mineralization in the central core of the Grassy Mountain deposit. These structural zones are also important from a geotechnical standpoint, as they are characterized by poor rock quality. The geological modeling that supports the current resource estimates includes these fault zones, but additional angled core holes would be useful to better define the extents of the structural zones and thereby aid in refining the geotechnical and high-grade modeling of the deposit.

15 MINERAL RESERVE ESTIMATES

15.1 Introduction

Mineral Reserves were estimated under the supervision of Mr. Joseph Seamons P.E., and classified in order of increasing confidence into Probable and Proven categories to be in accordance with the 2014 CIM Definition Standards and therefore Canadian National Instrument 43-101. Mr. Seamons is independent of Paramount and has no affiliations with Paramount except that of an independent consultant/client relationship.

15.1.1 2014 CIM Definition Standards

CIM Mineral Reserve definitions are given below, with CIM's explanatory material shown in italics.

15.1.1.1 Mineral Reserve

Mineral Reserves are sub-divided in order of increasing confidence into Probable Mineral Reserves and Proven Mineral Reserves. A Probable Mineral Reserve has a lower level of confidence than a Proven Mineral Reserve.

A Mineral Reserve is the economically mineable part of a Measured and/or Indicated Mineral Resource. It includes diluting materials and allowances for losses, which may occur when the material is mined or extracted and is defined by studies at Pre-Feasibility or Feasibility level as appropriate that include application of Modifying Factors. Such studies demonstrate that, at the time of reporting, extraction could reasonably be justified.

The reference point at which Mineral Reserves are defined, usually the point where the ore is delivered to the processing plant, must be stated. It is important that, in all situations where the reference point is different, such as for a saleable product, a clarifying statement is included to ensure that the reader is fully informed as to what is being reported.

The public disclosure of a Mineral Reserve must be demonstrated by a Pre-Feasibility Study or Feasibility Study.

Mineral Reserves are those parts of Mineral Resources which, after the application of all mining factors, result in an estimated tonnage and grade which, in the opinion of the Qualified Person(s) making the estimates, is the basis of an economically viable project after taking account of all relevant Modifying Factors. Mineral Reserves are inclusive of diluting material that will be mined in conjunction with the Mineral Reserves and delivered to the treatment plant or equivalent facility. The term 'Mineral Reserve' need not necessarily signify that extraction facilities are in place or operative or that all governmental approvals have been received. It does signify that there are reasonable expectations of such approvals.

'Reference point' refers to the mining or process point at which the Qualified Person prepares a Mineral Reserve. For example, most metal deposits disclose mineral reserves with a "mill feed" reference point. In these cases, reserves are reported as mined ore delivered to the plant and do not include reductions attributed to anticipated plant losses. In contrast, coal reserves have traditionally been reported as tonnes of "clean coal". In this coal example, reserves are reported as a "saleable product" reference point and include reductions for plant yield (recovery). The Qualified Person must clearly state the 'reference point' used in the Mineral Reserve estimate.

15.1.1.2 Probable Mineral Reserve

A Probable Mineral Reserve is the economically mineable part of an Indicated, and in some circumstances, a Measured Mineral Resource. The confidence in the Modifying Factors applying to a Probable Mineral Reserve is lower than that applying to a Proven Mineral Reserve.

The Qualified Person(s) may elect, to convert Measured Mineral Resources to Probable Mineral Reserves if the confidence in the Modifying Factors is lower than that applied to a Proven Mineral Reserve. Probable Mineral Reserve estimates must be demonstrated to be economic, at the time of reporting, by at least a Pre-Feasibility Study.

15.1.1.3 Proven Mineral Reserve

A Proven Mineral Reserve is the economically mineable part of a Measured Mineral Resource. A Proven Mineral Reserve implies a high degree of confidence in the Modifying Factors.

Application of the Proven Mineral Reserve category implies that the Qualified Person has the highest degree of confidence in the estimate with the consequent expectation in the minds of the readers of the report. The term should be restricted to that part of the deposit where production planning is taking place and for which any variation in the estimate would not significantly affect the potential economic viability of the deposit. Proven Mineral Reserve estimates must be demonstrated to be economic, at the time of reporting, by at least a Pre-Feasibility Study. Within the CIM Definition standards the term Proved Mineral Reserve is an equivalent term to a Proven Mineral Reserve.

15.1.1.4 Modifying Factors

Modifying Factors are considerations used to convert Mineral Resources to Mineral Reserves. These include, but are not restricted to, mining, processing, metallurgical, infrastructure, economic, marketing, legal, environmental, social and governmental factors.

15.1.2 Estimation Procedure

An underground mining scenario is assumed using mechanized cut-and-fill methods, which, following ramp-up, will produce 1,300–1,400 ton/d, four days a week. This mining rate will provide sufficient material for the 750 ton/d mill and processing plant to operate at full capacity for seven days a week.

The Proven and Probable reserves for Grassy Mountain have been estimated by first calculating an economic cut-off grade for mining underground stopes, then using the cut-off grade to design stope shapes centered on Measured and Indicated Mineral Resource blocks with gold grades greater than or equal to the cut-off grade. The QP used the resource block model provided by MDA (Gustin et al., 2019) in Surpac format. All Inferred material was considered to be waste with no value or metal content. Internal and external dilution and mining recoveries (ore loss) were estimated and applied as modifying factors based on the total tonnage of material inside of the final designs. The following sections provide details on the assumptions and design criteria used for estimating the reported Proven and Probable Mineral Reserves.

15.2 Mineral Reserve Statement

The reference point for the estimated Mineral Reserves is the crusher.

The Mineral Reserves estimated for the Grassy Mountain Project are provided in Table 15-1 and have an effective date of February 1, 2020. An underground mining scenario is assumed in this study using mechanized cut-and-fill methods. The reference point for the estimated reserves is the crusher. The Qualified Person for the estimate is Mr. Joseph Seamons, P.E., of MDA.

Table 15-1: Mineral Reserves Statement

Classification	Tons (x 1,000)	Gold Grade (oz/ton Au)	Silver Grade (oz/ton Ag)	Contained Metal (oz Au x 1,000)	Contained Metal (oz Ag x 1,000)
Proven	260	0.18	0.26	47	68
Probable	1,652	0.20	0.29	333	486
Proven + Probable	1,911	0.20	0.29	380	554
Ore Loss & Dilution	159	0.06	0.15	10	24
Fully Diluted Proven & Probable Mineral Reserves	2,070	0.19	0.28	390	578

Notes:

1. Mineral reserves have an effective date of 10 July, 2020. The Qualified Person for the estimate is Mr. Joseph Seamons P.E., of MDA.
2. Mineral Reserves are reported using the 2014 CIM Definition Standards.
3. Mineral Reserves are reported inside stope designs assuming drift-and-fill mining methods, and an economic gold cutoff grade of 0.10 oz /ton Au. The economic cutoff grade estimate uses a gold price of \$1,350/oz, mining costs of \$80/ton processed, surface re-handle costs of \$0.16/ton processed, process costs of \$30/ton processed, general and administrative costs of \$11.11/ton processed, and refining costs of \$5/oz Au recovered. Metallurgical recovery is 94.5% for gold. Mining recovery is 97% and mining dilution is assumed to be 8%. Mineralization that was either not classified or was assigned to Inferred Mineral Resources was set to waste. A 1.5% NSR royalty is payable. The reserves reference point is the 2020 FS mill crusher.
4. Tonnage and contained metal have been rounded to reflect the accuracy of the estimate. Apparent discrepancies are due to rounding.

15.3 Economic Cut-off Grade Calculation

The economic cut-off grade used for stope design is based on initial economic parameters shown in Table 15-2.

Table 15-2: Cut-off Grade Input Parameters

Name	Quantity	Unit
Underground mining costs	80.00	\$/ton processed
Surface rehandle	0.16	\$/ton processed
Process costs	30.00	\$/ton processed
G&A costs	11.11	\$/ton processed
Total operating costs	121.27	\$/ton processed
Refining cost	5.00	\$/ton processed
NSR royalty	1.5	percent
Gold metal recovery	94.5	percent
Gold selling price	1,350.00	\$/oz Au
Mineral Reserve cut-off grade	0.10	oz/ton Au

Note: G&A = general and administrative.

The calculated gold cut-off grade is 0.10 oz/ton Au. Silver was not included in the cut-off grade calculation due to its relatively small contribution to total economic value. However, revenue for silver

is included in the financial model, and therefore silver grade and silver contained metal are reported in the estimated Mineral Reserves.

The economic stope cut-off grade was used in the stope optimization to identify the Measured and Indicated blocks available for consideration to be converted to Mineral Reserves. Measured and Indicated resource blocks with grades less than the economic stope cut-off grade were applied to internal dilution.

15.4 Stope Design

The Mineral Reserves were constrained by the design of mineable stope shapes centered on Measured and Indicated blocks with grades greater than the economic stope cut-off grade. For stope optimization, the Stope Optimizer module from Deswik™ software was used. The shapes optimization parameters are stated in Table 15-3.


Table 15-3: Stope Optimization Parameters

Attribute	Quantity	Unit
Height	15	ft
Width	15	ft
Round length	10	ft
Minimum optimization length	10	ft
Maximum optimization length	50,000	ft
Minimum stope pillar	5	ft
Slice interval	2	ft
Cutoff grade	0.10	oz/ton AuEq
Evaluation method	cell centerline	

Each stope block was queried against the resource block model to determine the tonnages and grades within the stope shapes. Stopes with an average gold grade above the cut-off grade were selected to be included in the mine plan and Mineral Reserves estimate. Some isolated stopes above the cut-off grade were eliminated from consideration because the development to extract them would cost more than the economic return. The dilution and extraction were not considered during the stope optimization. The dilution and extraction were applied as modifying factors later in the process.

Development designs were generated concurrently for each stope shape with the purpose of minimizing development in waste. Figure 15-1 shows a typical mine production level design. These designs were done every 15 ft.

Figure 15-1: Mine Production Design of Level 3210, Plan View

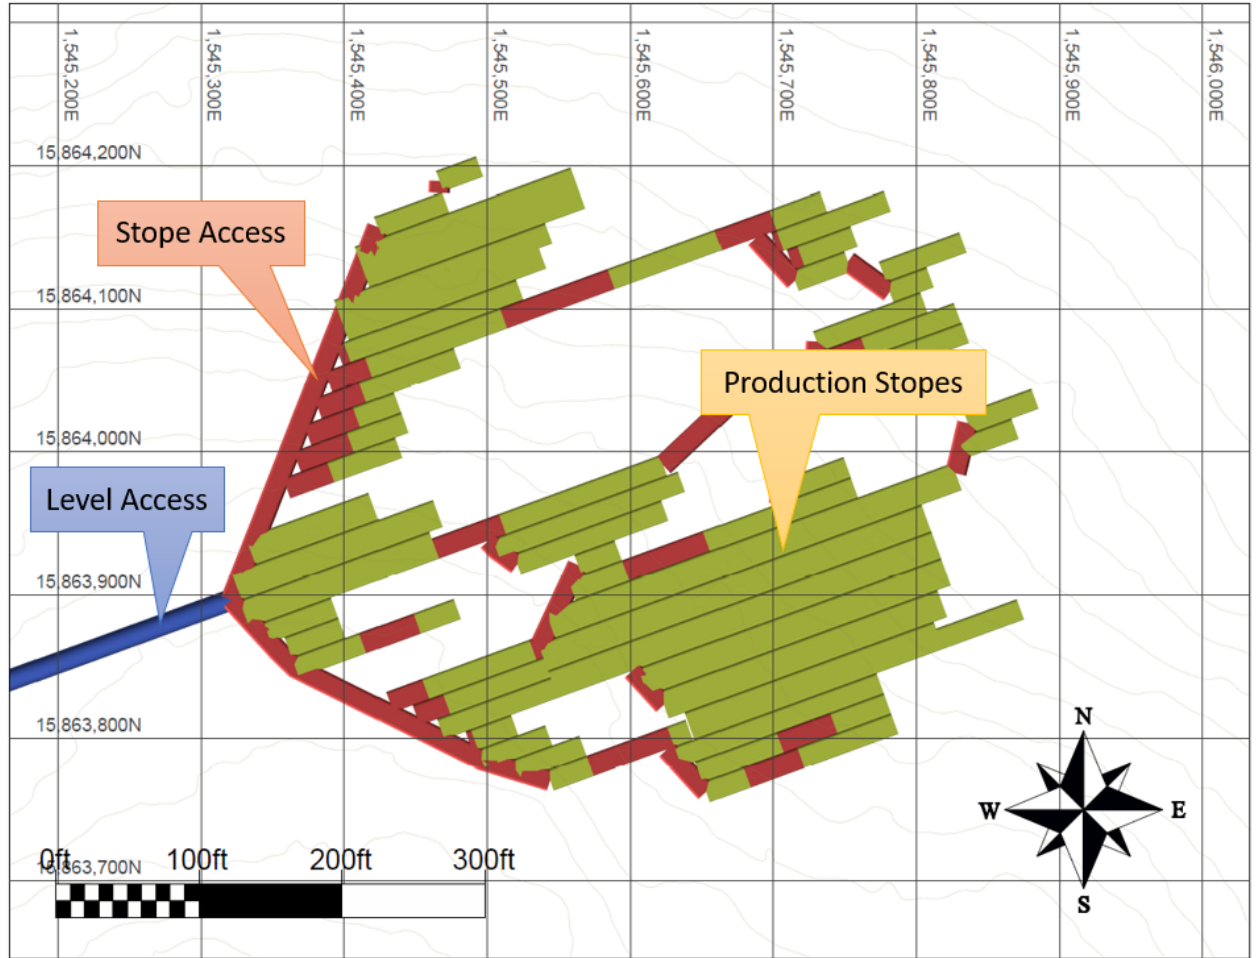


Note: Figure prepared by MDA, 2020.

15.5 Dilution and Recovery

15.5.1 External Dilution

A modifying factor of 8% was used for calculating external dilution tons. Grade was assigned to the external dilution by expanding the stope edge by one foot on all sides that are not adjacent to other stopes. The resource block model was queried against the expanded volume and 80% of the queried grade was used to determine the appropriate external dilution grades for silver and gold. Figure 15-2 shows an example of the external dilution on the 3240 level. The external dilution skin is the blue outline surrounding the planned stopes, which are shown in yellow.

Figure 15-2: External Dilution Scheme at Level 3240

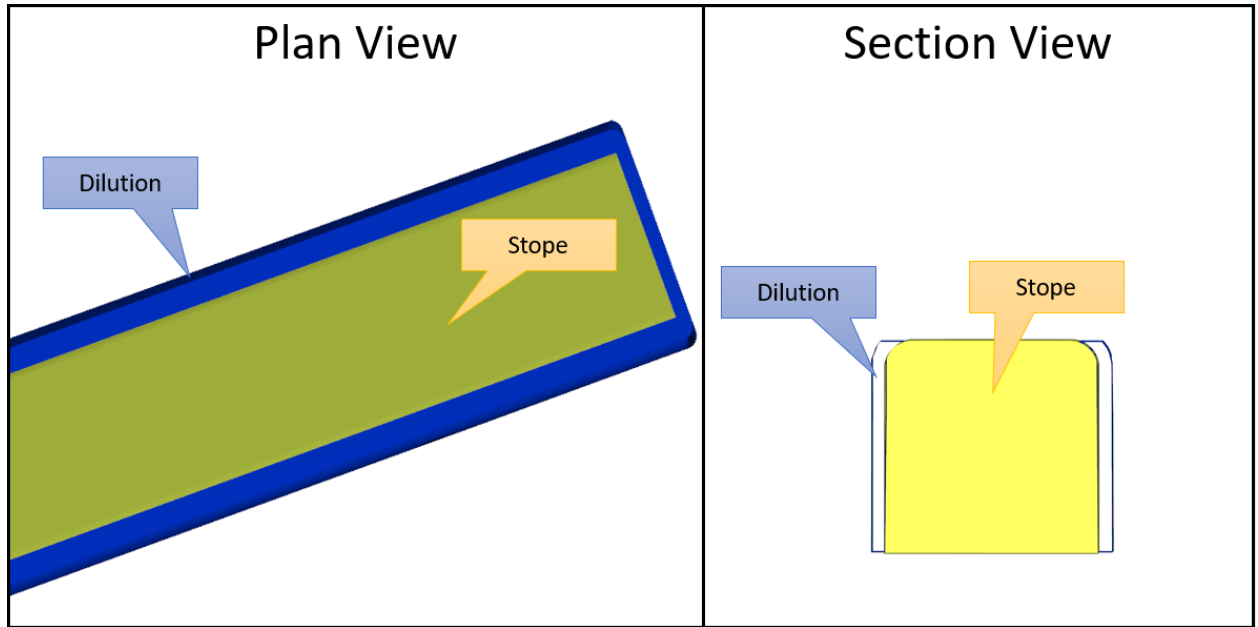

Note: Figure prepared by MDA, 2020.

The external dilution grade for each level is shown in Table 15-4 and is categorized by gold and silver grades.

Table 15-4: External Dilution Grade by Level

Level	Grade (oz/t Au)	Grade (oz/t Ag)
3525	0.065	0.134
3510	0.044	0.126
3495	0.064	0.186
3480	0.059	0.158
3465	0.042	0.161
3450	0.042	0.176
3435	0.051	0.222
3420	0.053	0.212
3405	0.054	0.176
3390	0.057	0.188
3375	0.064	0.200
3360	0.061	0.216
3345	0.061	0.195
3330	0.060	0.198
3315	0.072	0.194
3300	0.064	0.184
3285	0.074	0.206

Level	Grade (oz/t Au)	Grade (oz/t Ag)
3270	0.066	0.182
3255	0.068	0.177
3240	0.072	0.159
3225	0.075	0.152
3210	0.075	0.168
3195	0.062	0.173
3180	0.057	0.143
3165	0.071	0.133
3150	0.053	0.117
3135	0.058	0.123
3120	0.056	0.123
3105	0.066	0.107
3090	0.055	0.106
3075	0.054	0.084
3060	0.030	0.061

15.5.2 Internal Dilution

All Inferred resource blocks or partial blocks within the stopes and all unclassified material within the stopes is considered internal dilution. The tons were accounted for with zero grade.

15.5.3 Mining Recovery

Mining recovery is estimated to be 97% based on an assumed ore loss of 3%. This is considered appropriate for the highly selective mechanized cut-and-fill mining method selected for the Grassy Mountain deposit and it is based on similar operations in disseminated ore bodies.

15.6 Discussion of Mineral Reserves

The QP is not aware of any mining, metallurgical, infrastructure, permitting or other relevant factors not discussed in this Report that could materially affect the Mineral Reserve estimate.

16 MINING METHODS


16.1 Mining Method Selection

The mechanized cut-and-fill mining method was selected using the methodology proposed by Nicholas (1981). Cemented rock fill (CRF) will be used for backfill. The mining direction will be underhand. The mechanized cut-and-fill method is highly flexible and can achieve high recovery rates in deposits with complex geometries, as is the case at the Grassy Mountain deposit. The estimated mine life is eight years.

16.1.1 Mechanized Cut-and-fill Mining


The Grassy Mountain mine will be an underground operation accessed via one decline and a system of internal ramps. One ventilation raise is included in the design to be used for ventilation and secondary egress as shown in Figure 16-1. A plan view of the proposed mine design is shown in Figure 16-2.

Figure 16-1: Grassy Mountain Mine Cross Section Looking North

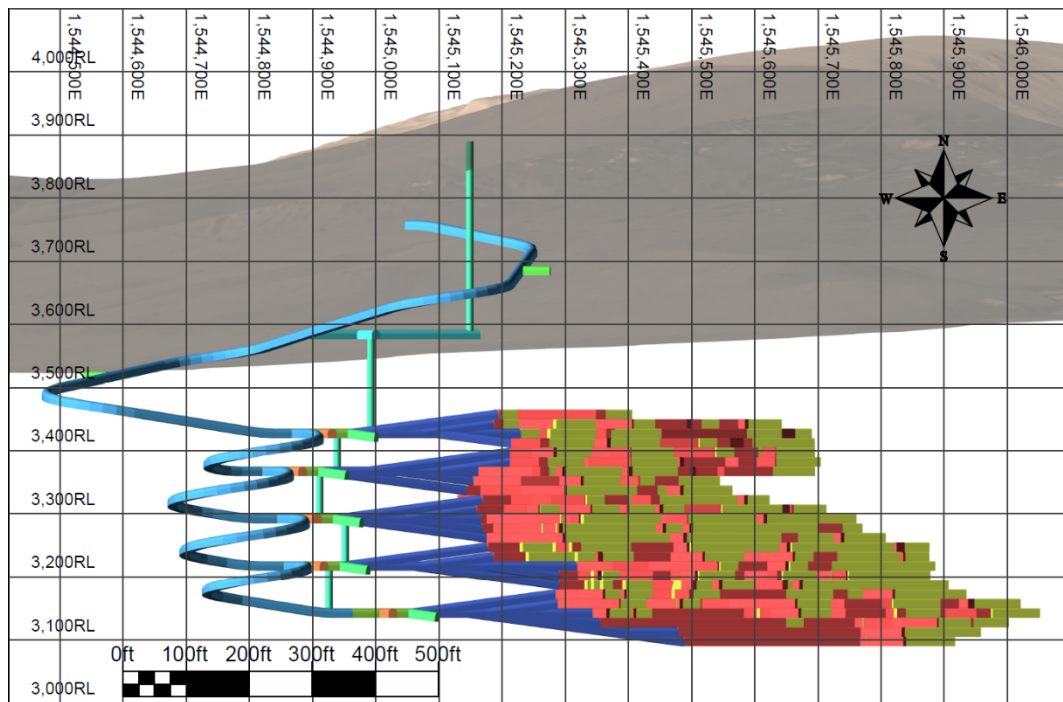

Note: Figure prepared by MDA, 2020. Mining activity types shown by the same colors used in Figure 16-1 and Figure 16-2.

Figure 16-2: Proposed Grassy Mountain Mine Plan (plan view)

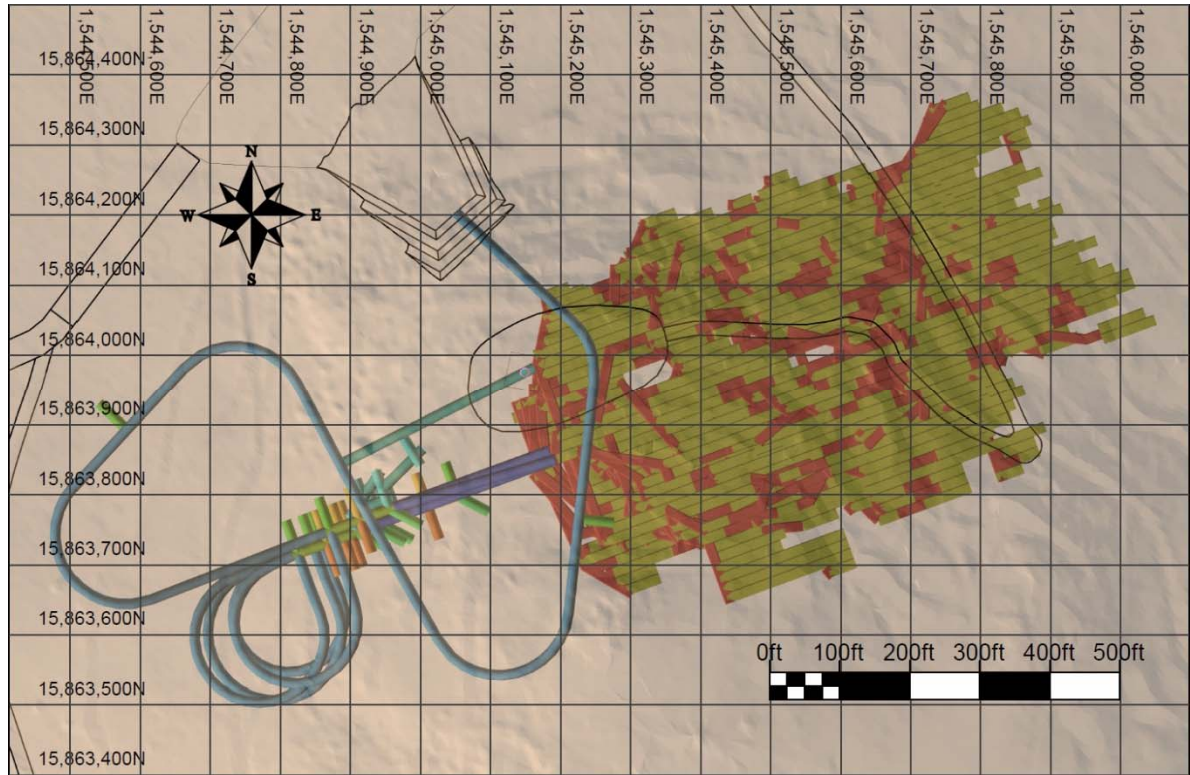


Note: Figure prepared by MDA, 2020. Mining activity types of workings shown by the same colors used in Figure 16-1 and Figure 16-2.

The mine design was based on an average production rate of 1,200 tons per day using a four-day-on and three-day-off schedule, with two 12-hour shifts per day, to provide 24-hour coverage during the four operating days at full operation. This will provide sufficient material to feed 750 tons/d to the mill on a seven day per week basis.


The nominal development size will be 15 ft wide by 15 ft high as shown in Figure 16-3. The nominal Topcut-A production size is to be 15 ft wide by 15 ft high as shown in Figure 16-3. The Topcut-A will be used when the material above is native rock. The nominal Undercut-B production size is to be 20 ft wide by 15 ft high as shown in Figure 16-3. The Undercut-B will be used when the material above is cemented backfill from a Topcut-A production drift as shown in Figure 16-4. The nominal Undercut-C production size is to be 30 ft wide by 15 ft high as shown in Figure 16-3. The Undercut-C will be used when the material above is cemented backfill from an Undercut-B as shown in Figure 16-4. This heading layout will tolerate very poor ground conditions while still maximizing production in a cut-and-fill mine. The sizes will allow the miners and associated diesel mining equipment access and flexibility to maximize production from the mine as well as minimize waste haulage from the development headings.

Figure 16-3: Drift Profiles

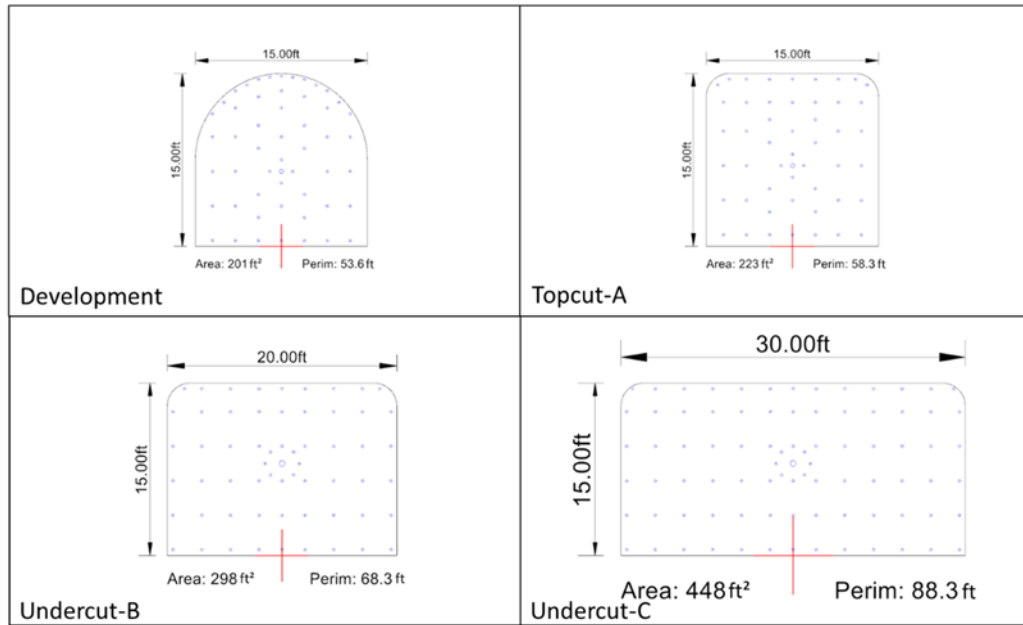

Note: Figure prepared by MDA, 2020.

Figure 16-4: Production Drift Layout (Section Looking East)

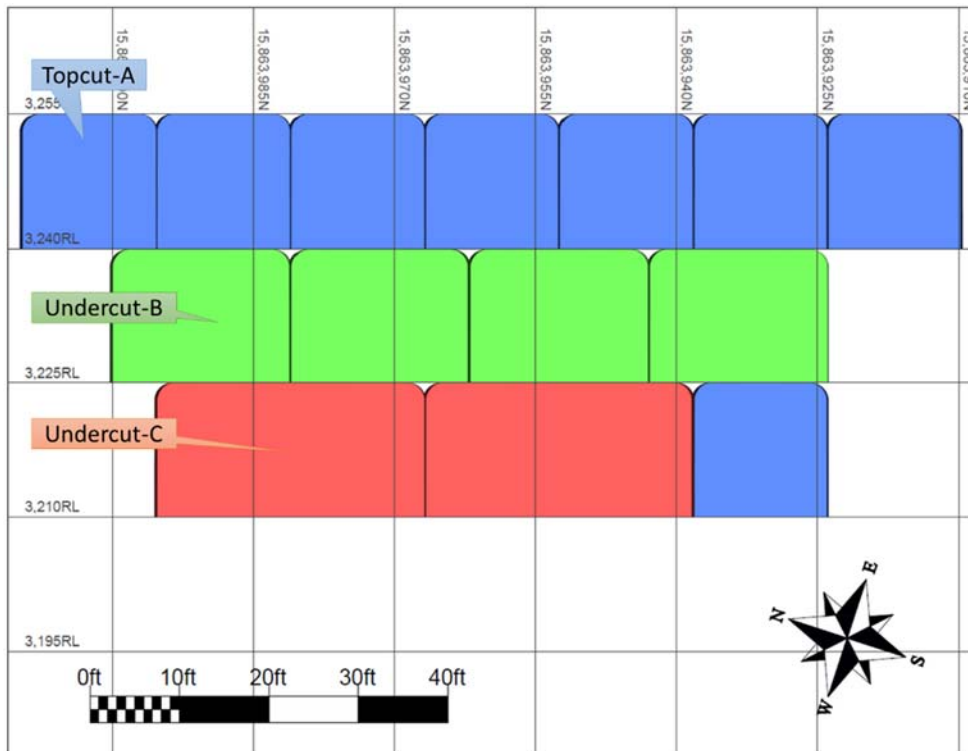


Note: Figure prepared by MDA, 2020.

The mining cycle involves drilling, blasting, and mucking for the development and production access. The final part of the mining cycle is to backfill the stopes.

16.1.2 Mining Method Sequence

The mining sequence contains a detailed level sequence and an underhand sequence. The detailed level sequence for a typical level can be seen in Figure 16-5. The level access is mined first. The mains are mined second. Typically, two mains are mined at the same time providing multiple mining locations on a level. After the mains are mined, then the production drifts can begin mining. The production drifts are sequenced with primaries and secondaries. The primaries are mined and backfilled first allowing for a backfill minimum cure time of 14-days between the primaries and secondaries. This continues as shown in Figure 16-5 until the entire level is complete. After the entire level is complete the level access is backfilled and a 28-day delay for the cure time is applied. After the cure time is complete the level below can start.


Figure 16-5: Detailed level Sequence for a Typical Level

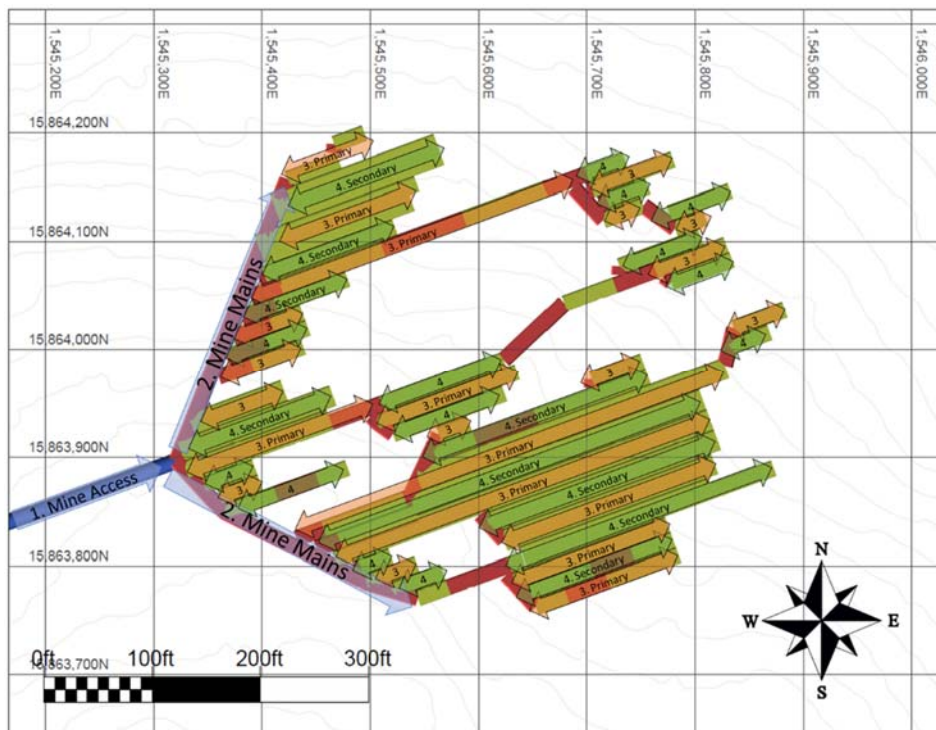

Note: Figure prepared by MDA, 2020.

The underhand sequence is grouped into lifts as shown in Figure 16-6.

Figure 16-6: Mining Lifts

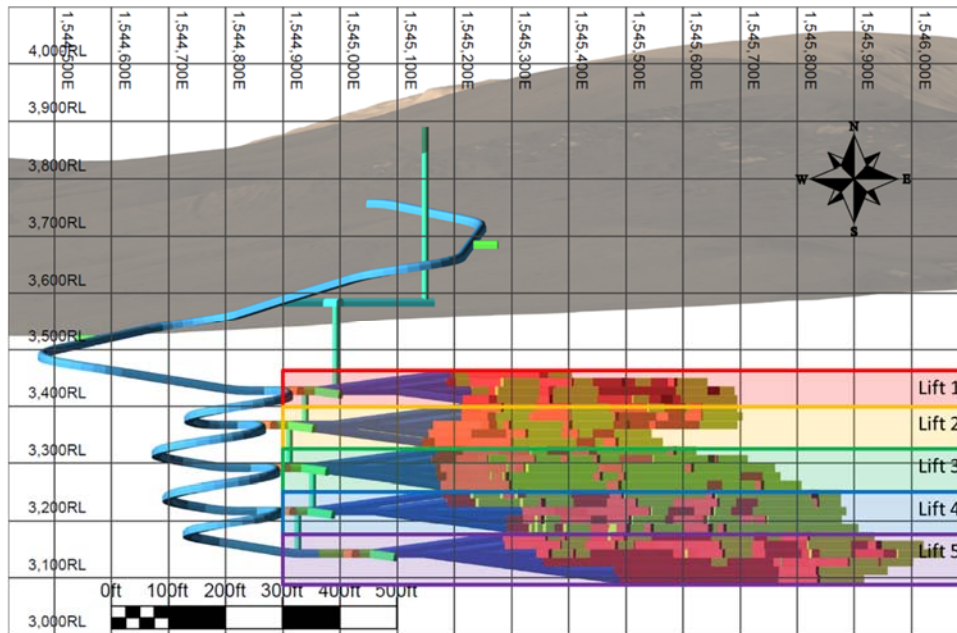

Note: Figure prepared by MDA, 2020.

One level in each lift can be mining at any given time during the life of mine. The underhand sequence starts at the top and works down in elevation. Constraints are applied to ensure that the bottom level of a lift does not influence the top level of the lift below.

16.2 Geotechnical Analysis

16.2.1 Overview

The Grassy Mountain deposit is situated in a horst block which has been raised 50–200 ft in a region of complex block faulting and rotation. Faulting is dominated by post-mineral N30°W to N10°E striking normal faults developed during Basin and Range extension. On the northeast side of the deposit, these faults progressively down-drop mineralization beneath post-mineral cover. These offsets are suggested by interpreted offsets in drill holes of a prominent white sinter bed, as well as intersections with a fault gouge. The N70°E striking the Grassy Mountain fault shows a minor vertical offset of 10–40 ft.

The North and Grassy faults are significant fault structures that pose a risk to the stability of an open stoping method; hence, these areas are considered suitable only for a limited man-entry mining method such as mechanized cut-and-fill, where conditions can be well controlled.

Degradation of the Grassy Mountain Formation results in difficult mining conditions that can be mitigated through additional ground support, which would involve a higher mining cost with slower advance rates in those areas.

Stress measurements are not currently available. In the absence of this information, a stress regime based on the World Stress Map was used to obtain a range of estimates. Based on the shallow depth, ground stress is relatively low, and rock damage due to higher mining-induced stress concentrations is only anticipated in high-extraction or sequence closure areas and weaker rock mass areas. However, a reduction in the mining stresses around excavations is likely to adversely affect the stability

of large open-span areas. Tensile failure and gravity-induced unraveling are foreseen as the main failure mechanisms.

The Grassy Mountain deposit is in a structurally complex, clay-altered, epithermal environment. Rock mass conditions in the infrastructure and production areas vary from Poor to Fair quality (RMR 20–45; RMR mean 40–45) with the poorest conditions within major structures that run longitudinally through and bound the deposit. Outside of these fault areas, rock mass conditions are generally Fair. However, localized zones of Poor ground potentially associated with secondary structures or locally elevated alteration intensity are present throughout the planned mining area.

Excavation stability assessments were completed using industry-accepted empirical relationships, with reference to analogue mines where possible. The rock mass conditions (Poor to Fair) are considered suitable only for a selective underground mining methods and limited sizes.

Ground support design considers industry-standard empirical guidelines and GMS's experience in variable ground conditions. Compromises have been made in the extraction sequence due to the need to balance grade and production profiles, extraction of wide orebody areas, and other geotechnical constraints. Ultimately, some aspects of the sequence may not be geotechnically optimal, and Faults

A plan showing the major faults in the deposit area was included as Figure 7-3.

The North and Grassy faults are significant fault structures that pose a risk to the stability of an open stoping method; these areas are therefore considered suitable only for a limited man-entry mining method such mechanized cut and fill, where conditions can be well controlled. Two secondary structural systems have been identified, which cut and cause slight dislocations in the veins and mineralized bodies: one corresponding to normal-displacement structures with a north–northeast–south–southwest strike and the other with a northwest–southeast strike. Not all fault structures could be modelled, and the influence of several secondary- and tertiary-level structures in the deposit are not well understood. Several fault structures will need to be further defined and interpreted during the decline ramp excavation program.

16.2.1.1 Degradation Zones

Time-dependent drill core degradation has previously been identified at Grassy Mountain. In general, degraded zones are contained within siliceous sinter bodies, conglomerates, and interbedded tuff beds within the Grassy Mountain Formation. Degradation is strongest in intervals that are observed or interpreted as having contained silicic and potassic alteration. Contacts of the Grassy Mountain Formation were used to extrapolate degradation zones beyond areas of graphically-logged intervals in order to construct moderate- and high-confidence degradation shells. Across the deposit, the North and Grassy faults produce significant degradation above and below the conglomerates and tuff strata, and the faults to the west appear to displace or bound the degradation zone.

Degradation of Grassy Mountain Formation lithologic units results in difficult mining conditions that can be mitigated through additional ground support. This would result in a higher mining cost with slower advance rates in those areas.

16.2.1.2 Structural Fabric

The geotechnical holes drilled in the 2016–2017 campaign were drilled with “triple tube” techniques to increase core integrity and preservation for best geotechnical logging and measurements. Observations of the core suggest that there is little systematic structure, except for the very steep features often sub-parallel to the core axis that are likely oriented similarly to the interpreted northwest–southeast-striking faults associated with mineralization. The remaining structure is typically very small-scale, irregular, and generally related to micro-defects within the rock mass.

16.2.1.3 In-situ Stress

Stress measurements are not currently available. In the absence of this information, a stress regime based on the World Stress Map was used to obtain a range of estimates. Uncertainty in the stress magnitude will need to be further assessed and interpreted during the decline ramp excavation program.

Based on the shallow depth, ground stress is relatively low, and rock damage due to higher mining-induced stress concentrations is only anticipated in high-extraction or sequence closure areas and weaker rock mass areas. However, a reduction in the mining stresses around excavations is likely to adversely affect the stability of large, open-span areas. Tensile failure and gravity-induced unraveling are foreseen as the main failure mechanisms. The pre-mining stress field should be further evaluated.

16.2.2 Geotechnical Characterization

A geotechnical investigation was carried out by Golder in 2017 and Ausenco in 2018 to characterize rock mass conditions in support of an underground design for the 2018 PFS. A combined total of 27 core holes were drilled through the deposit and geotechnically logged and sampled for laboratory strength testing as part of the 2016–2017 program. Point load testing was also conducted on cores retrieved from the geotechnical drill holes. After the 2016–2017 core holes program, GMS geotechnically logged two core holes from the 2019 program.

The geotechnical database from the 2016–2017 program was checked against the respective core photographs for internal data consistency and the data are considered to be suitable for a feasibility-level study.

Overall, the following information was used to base geotechnical assessments in the 2020 FS:

- 2016–2017 core holes database with RQD and core recovery data;
- Core photographs for 2016–2017 core holes;
- Detailed geotechnical logging for 25 holes by Paramount under Golder training and review (2016–2017);
- Detailed geotechnical logging for two holes by Golder (2016–2017);
- Detailed geotechnical logging for two holes by Paramount (2019);
- Field point load testing of cores from six holes (total of 300 tests) during the 2016–2017 program and from two holes (total of 166 tests) during the 2019 program;
- Laboratory strength testing for two programs (2016–2017 and 2019) including uniaxial compressive strength (UCS), Brazilian tensile strength, and elastic properties.


16.2.3 Golder Geotechnical Appraisal

A geotechnical appraisal of the proposed underground mine area was carried out by Golder during 2016–2017 (Golder Associates Inc, 2018). Geotechnical data were available from three different drilling programs that were completed prior to the 2016–2017 drill program. Calico, Newmont, and Atlas carried out RQD measurements. Additional geotechnical data from Newmont and Calico drilling were reviewed, but not used directly in Golder's 2016–2017 evaluation, due to uncertain reliability and consistency in the data.

Two holes were logged in detail for geotechnical characterization by Golder personnel at the drill rig. The other 2016–2017 holes were logged by Paramount personnel according to Golder's instructions and procedures (25 core holes).

Golder used the geotechnical log data to characterize the orebody and surrounding rock mass, based on an RMR calculation from the logged data. Figure 16-7 presents the RMR76 histogram for all core that was geotechnically logged from the 2016–2017 drill program. The pre-2016–2017 Calico, Newmont, and Atlas historical data were not evaluated with the 2016–2017 program. Golder did not consider the pre- 2016–2017 data usable with the 2016–2017 RMR log data.

Figure 16-7: Golder Rock Mass Rating (all 2016–2017 core)

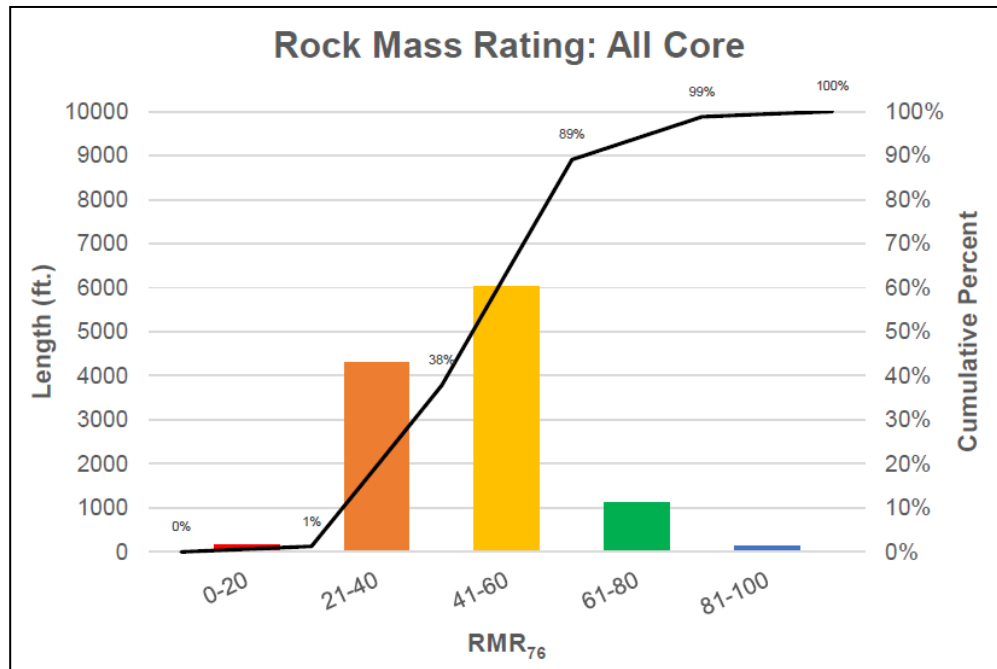

Note: Figure from Golder (2018).

Golder’s drill core review in 2016–2017 indicated the presence of a significant number of zones of broken rock fragments within what Golder termed “a matrix of soil” and referred to as “Soil Matrix Breccia”. These zones are more correctly referred to as “Clay Matrix Breccia”. The Clay Matrix Breccia, an important contributor to Type III rock quality (Table 16-1) is readily observed in cores in split tubes immediately after drilling, but it is also clearly identifiable after the core has been boxed and somewhat disturbed.

Table 16-1: Rock Quality Categories

Rock Quality Category	Description	Approximate Expected Percent of Excavations(a) (%)
Type I	Moderately fractured rock	20
Type II	Poor quality, highly fractured rock	40
Type III	Clay matrix breccia and other very poor-quality rock (clay, broken rock and rubble in core boxes)	40 (15% clay matrix breccia, 25% other poor-quality rock)

Note: Based on percent encountered within 2016–2017 drill holes.

The geological and geotechnical data did not identify any trends or patterns that would allow the delineation of rock quality domains for mine design, with the exception of Very Poor-quality rock encountered in and around the interpreted sub-vertical structures. However, Very Poor-quality rock was not limited to the vicinity of the structures; it was also frequently observed between structures. This degree of variability required a selective mining method that can quickly respond to changing ground conditions.

Golder (2018) concluded that, in the absence of spatial patterns in rock quality, three categories of rock quality should be applied for PFS-level design and cost estimating purposes (refer to Table 16-1).


16.2.4 Ausenco Geotechnical Work

In 2017, Ausenco’s geotechnical group conducted a review of all the available geotechnical information provided by Paramount, including core logs and core photographs. The main objectives were to select a mining method and develop recommendations for support in underground openings.

Ausenco’s geotechnical group reviewed all core photographs from the 2016–2017 core drilling program and estimated additional geotechnical parameters that were incorporated into the geotechnical review.

In order to characterize the rock mass of the deposit, a statistical analysis was performed on the geotechnical data derived from the core logging by Paramount and Golder. The RMR76 results analyses are shown in Figure 16-8.

Figure 16-8: RMR 76 Histogram from 27 Drill Holes.

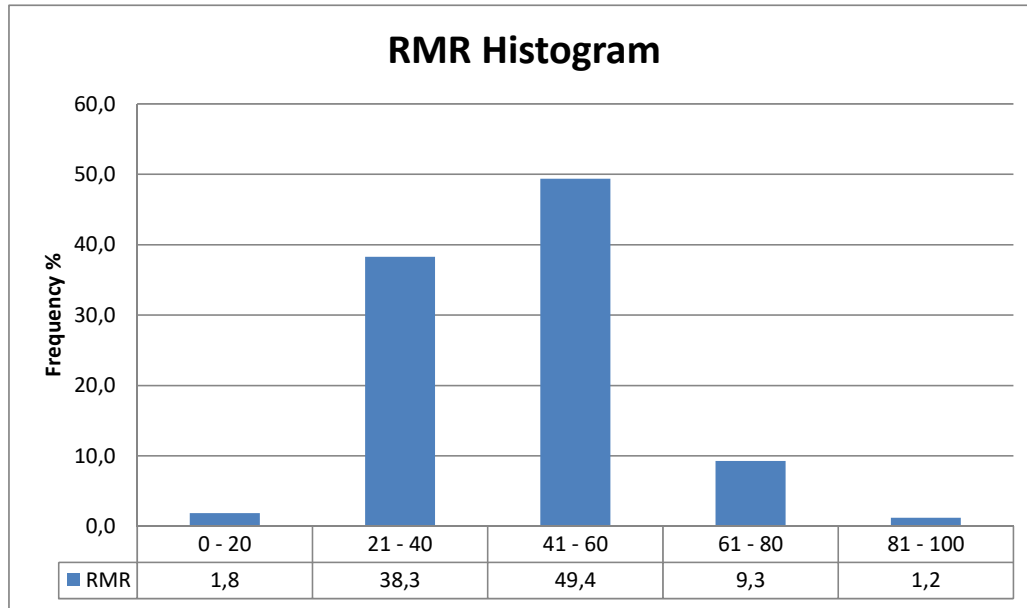

Note: Figure prepared by Ausenco, 2017.

Per the analysis conducted by Ausenco, the majority of the ground conditions of the Grassy Mountain deposit are classified as being of Fair to Poor rock quality, and the RMR is typically less than 49.

Based on RMR76 statistics and Ausenco’s interpretation and correlation with the geological database, it can be concluded that Golder’s previous analysis (unknown at that time), with the same data, had very similar results.

The Grassy Mountain deposit was assigned by Ausenco to three rock classes by geotechnical quality:

- Class 1: Rocks of Poor geotechnical quality according to RMR76; approximately 40% of the deposit.
- Class 2: Rocks of Fair geotechnical quality according to RMR76; approximately 50% of the deposit.
- Class 3: Rocks of Good geotechnical quality according to RMR76; approximately 10% of the deposit.

Table 16-2 shows the cumulative frequency values based on the RMR76 histogram from 27 drill holes (Figure 16-8) with the rock classes assigned by Ausenco.


Table 16-2: Ausenco Rock Quality Categories

Rock Quality (RMR)	Frequency (%)	Rock Class	Deposit (%)
0–20	Very Poor	1.8	—
20–40	Poor	38.3	Class 1
40–60	Fair	49.4	Class 2
60–80	Good	9.3	Class 3
80–100	Very Good	1.2	—

The Very Poor and Very Good rock qualities, according to the RMR classification, are not representative of the deposit due to the low frequencies measured, so they were omitted from the three rock classes assigned. However, they do exist and should be considered when mining, in particular the Very Poor quality, which may require additional support.

Examples of the three Ausenco 2017 RMR classes are shown in Figure 16-9.

Figure 16-9: Examples of Three Geotechnical Rock Classes

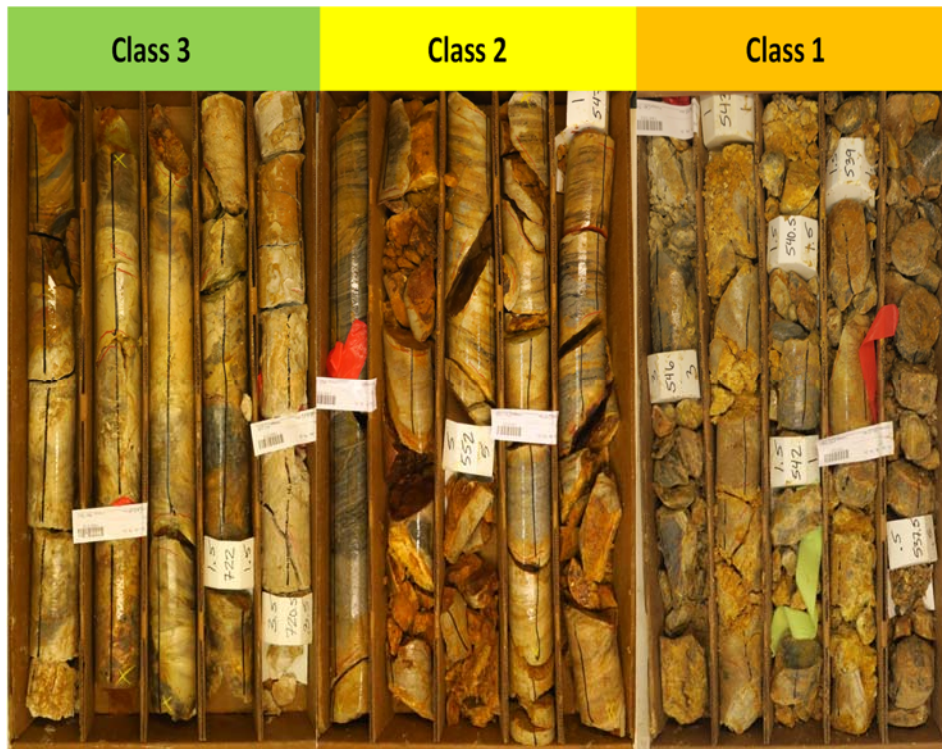

Note: Figure prepared by Ausenco, 2017.

16.2.5 2020 Feasibility Study Geotechnical Analysis

The basic geotechnical parameters recorded in the field during the 2016–2017 and 2019 drill holes program were combined to form an RMR system (Bieniawski, 1976). These data were used to create an RMR profile with depth for each of the geotechnical holes drilled. The RMR76 system consists of

a rating scale accounting for intact rock strength (IRS), fracture frequency per meter (ff/m), joint conditions, and groundwater. RMR values consider a maximum possible value of 100 for each run. Dry conditions were assumed for RMR calculations, as groundwater pressures are accounted for during the stability analysis using effective stress type analyses. A summary of RMR values per area of the deposit is presented in Table 16-3.

Table 16-3: Summary of RMR (Bieniawski, 1976) Values by Area

Area	RMR (B76)		Data (n°)
	Mean	Standard Deviation	
Decline ramp/mine infrastructure	38	18	226
Stopes (drifts)	40	18	1,123
Crown pillar	41	19	242
Center of deposit (Section)	38	20	149

Data from the geotechnical core logging and the statistical analysis indicate that the geotechnical units have similar geotechnical conditions. The data indicate that the deposit presents no substantial differences in geotechnical qualities among the stope areas and mine infrastructure location, including the intersections with faults or veins, which present Poor to Very Poor qualities. In general, the deposit presents a high variability in geotechnical qualities over short distances, but with a similar behavior for the whole area of the proposed mine. This assumption can be refuted or confirmed by the rock quality observed in the core trays shown in Figure 16-10.

Figure 16-10: GM19-37 Core Trays (89.5 to 105.5 ft.) – High Variability in Geotechnical Conditions.



Note: Figure prepared by GMS, 2020.

16.2.6 Intact Rock Strength

Physical testing of suitable rock core specimens allows determining the mechanical properties of intact rock required for mine design using rock mass classification or numerical analysis methods. The IRS is commonly measured in uniaxial compression, point load, indirect tensile, and triaxial compression tests (Brady and Brown, 2004). Usually, a limited (but representative) number of cylindrical specimens of each rock type should be tested for UCS in a suitable laboratory equipped with a stiff testing machine. A larger number of point load tests can be carried out during the core logging process for orebody delineation. A comprehensive set of suggested testing methods has been published by the International Society for Rock Mechanics (ISRM) (Brown, 1981; Ulusay and Hudson, 2007).

Golder selected core samples for laboratory testing from six of the 2016–2017 geotechnical core holes. Samples from one of the 2019 geotechnical core holes were also selected by GMS for laboratory testing. The samples were submitted to Golder’s laboratory in Burnaby, British Columbia.

Point load tests (PLTs) were conducted by Paramount geologists in the core shed after geotechnical logging, in keeping with the ASTM Standard D 5731-07: Determination of the Point Load Strength Index of Rocks, and Application to Rock Strength Classifications. PLTs were performed at approximately 10-ft intervals down hole.

Table 16-4 provides a summary of the IRS parameters by geotechnical units considering the median depths where the deposit is located.

Table 16-4: Intact Rock Strength for Geotechnical Units calculated from PLTs

Geotechnical Unit	H (ft)	Intact Rock			
		mi*	UCS (Mpa)	Ei** (Gpa)	ν (T/m ³)
GTU-2 (sandstone/arkose (D=0.5))	492	12.7	116.70	60.2	2.47
	984				
GTU-2 (sandstone/arkose (D=0))	492	12.7	116.70	60.2	2.47
	984				
GTU-3 (siltstone (D=0.5))	492	7.0	101.92	46.9	2.49
	984				
GTU-3 (siltstone (D=0))	492	7.0	101.92	46.9	2.49
	984				
GTU-4 (tuff (D=0.5))	492	13.0	158.08	57.1	2.44
	984				
GTU-4 (tuff (D=0))	492	13.0	158.08	57.1	2.44
	984				
GTU-5 (sinter (D=0.5))	492	13.1	120.92	69.7	2.45
	984				
GTU-5 (sinter (D=0))	492	13.1	120.92	69.7	2.45
	984				
GTU- 6 (conglomerate (D=0.5))	492	21.0	90.41	69.45	2.47
	984				
GTU-6 (Conglomerate (D=0))	492	21.0	90.41	69.45	2.47
	984				

16.2.7 Geotechnical Model

The geotechnical model for the 2020 FS is the final result of the combination of the geological model, the rock mass fabric descriptions, the rock mass strengths, and the hydrogeological model. This geotechnical model describes the rock mass units from an engineering perspective through geotechnical domains. Geotechnical domains are zones showing similar geotechnical properties, based on rock type, rock mass strength, and geological characteristics. In particular, in the Grassy

Mountain deposit the geotechnical domains are controlled by the lithology present and its alteration grade as geotechnical units. Seven geotechnical units were identified:

- Cover soil;
- Sandstone/arkose;
- Siltstone-mudstone;
- Tuff;
- Sinter;
- Conglomerate;
- Clay matrix breccia.

Overall, the first layer corresponds to cover soil with a thickness of less than 9.8 ft. Below that is a jointed rock mass mainly composed of a series of layers of sandstone/arkose, siltstone, tuff, sinter, and conglomerate. The layers do not follow any sequence between geotechnical units, and clay matrix breccia can be located between every geotechnical unit combination around the deposit and, especially, close to drifts. In general, all the geotechnical units are highly jointed and have strengths between 95–135 MPa.

A statistical analysis was performed to provide the frequency of geotechnical qualities per each geotechnical unit. The RQD, RMR76, and GSI 2013 values are summarized in Table 16-5.

The rock mass quality of the deposit's geotechnical units does not improve with depth. Around faults/veins, the geotechnical units are in Very Poor-quality rock with an RMR of less than 30. However, Very Poor-quality rock is not limited to the vicinity of the faults/veins; it is also frequently observed between faults/veins. There is no clear evidence that these zones correspond to the veins, but the statistical analysis of RMR76 and PLT values indicates that the geotechnical units have a separate population with low values in the approximate location of the faults/veins.

Based on the RMR76 statistics and the current interpretation and correlation with the previous geotechnical analysis conducted, it can be concluded that the defined geotechnical units are classified as being of Fair to Poor rock quality, represented by an RMR76 of typically less than 48 and a GSI2013 of less than 45.

Core logging data suggest that the generalized Hoek-Brown failure criteria is a suitable method for calculating the rock mass strength parameters for all of the units, because the majority of the rock mass is considered jointed hard rock material. When RMR values are less than 23, the Hoek-Brown failure criteria are no longer applicable because strength parameters are not strongly dependent on confinement.

Table 16-5 provides a summary of rock mass strength parameters by geotechnical units considering the median depths where the deposit is located.

Table 16-5: Summary of RQD, RMR76, and GSI 2013 Values by Geotechnical Unit.

Geotechnical Unit (GTU)	Description	RQD		RMR76		GSI2013	
		Weighted Mean	Weighted Standard Deviation	Weighted Mean	Weighted Standard Deviation	Weighted Mean	Weighted Standard Deviation
1	Cover soil	NA	NA	NA	NA	NA	NA
2	Sandstone, arkose	50.3	26.8	48.0	12.7	45.1	21.0
3	Siltstone, mudstone, breccia	41.2	26.8	42.6	12.4	37.4	20.4
4	Tuff	41.7	27.6	41.7	10.2	38.8	22.3
5	Sinter	35.0	30.4	44.7	11.1	37.1	22.0
6	Conglomerate	NA	NA	NA	NA	NA	NA
7	Clay matrix breccia	23.4	28.1	30.1	13.6	18.9	19.3

Note: NA = not applicable.

Table 16-6: Strength Parameters for Geotechnical Units.

Geotechnical Unit	Rock Mass											
	H					s	TM	E	H-D2005	v	C	∅
	(ft)	GSI	mb	s	a	(Mpa)	(Gpa)			(kPa)	(°)	
GTU-2 (sandstone/arkose (D=0.5))	492	45	0.929	0.0007	0.508	-0.082	6.37	0.26	798	48.0		
	984								1184	42.8		
GTU-2 (sandstone/arkose (D=0))	492	45	1.788	0.0022	0.508	-0.145	13.46	0.26	1075	52.9		
	984								1542	48.0		
GTU-3 (siltstone (D=0.5))	492	37	0.349	0.0002	0.514	-0.066	3.01	0.27	525	38.3		
	984								777	33.1		
GTU-3 (siltstone (D=0))	492	37	0.738	0.0009	0.514	-0.126	6.10	0.27	743	44.5		
	984								1065	39.3		
GTU-4 (tuff (D=0.5))	492	37	0.647	0.0002	0.514	-0.055	3.66	0.27	717	47.2		
	984								1088	42.0		
GTU-4 (tuff (D=0))	492	37	1.370	0.0009	0.514	-0.105	7.42	0.27	987	53.0		
	984								1453	48.1		
GTU-5 (sinter (D=0.5))	492	37	0.652	0.0002	0.514	-0.042	4.47	0.27	646	45.2		
	984								986	39.9		
GTU-5 (sinter (D=0))	492	37	1.381	0.0009	0.514	-0.080	9.06	0.27	875	51.2		
	984								1308	46.2		
GTU-6 (conglomerate (D=0.5))	492	40	1.206	0.0003	0.511	-0.025	5.34	0.27	706	48.2		
	984								1099	43.0		
GTU-6 (conglomerate (D=0))	492	40	2.464	0.0013	0.511	-0.047	11.09	0.27	916	53.7		
	984								1410	48.8		

16.2.8 Summary of Geotechnical Analysis and Evaluation for Underground Mining

The QP believes the available geotechnical data are adequate for designing the mine openings associated with the estimation of the Grassy Mountain Mineral Reserves at the current stage. Risks associated with the current level of geotechnical analysis are discussed in Section 25.16, and recommendations for additional work are presented in Section 26.2.5.

While the rock quality is variable and the deposit is mineable based on the chosen mining method, care must be taken during the execution of the mine plan. The selected mining method and underground support recommendations are specified in Sections 16.4 and 16.5 of this Report.

16.3 Excavation Design

16.3.1 Mining Method Selection

The selection method assessment was carried out during the 2018 PFS according to the methodology proposed by Nicholas (1981), where the deposit geometry and the geotechnical parameters are

assessed as main parameters. In particular, the methodology provides a ranking of mining methods in order to incorporate economic parameters for the final selection.

The design factors that influence the choice of mining method include:

- Orebody geometry (e.g. vein shape, thickness, dip, etc.) and grade distribution within the deposit;
- Rock mechanics characteristic of the veins, hanging wall, and footwall rock mass;
- Mining costs and capitalization requirements;
- Mining rate;
- Type and availability of mining labor;
- Environmental concerns;
- Other site-specific considerations.

The assessment suggested the mechanized cut-and-fill mining method would be most appropriate for the Grassy Mountain Project.

The mechanized cut-and-fill method is highly flexible and can achieve high recovery rates in deposits with complex and flat-dipping geometries, as is the case at the Grassy Mountain deposit.

16.3.2 Drift Sizes and Stability Assessments

Preliminary dimensioning was carried out during the 2018 PFS using the empirical design proposed by Mathews (1980). The analysis provided the hydraulic radius for the maximum drift dimension under 60% stability conditions.


The stability graph is a function of the stability number, which represents the ability of the rock mass to remain stable under certain operating stress conditions as a function of the hydraulic radius, which represents the geometry of the stope surface. The main concept associated with the stability graph is that the surface size of an excavation can be related to the strength properties of the rock mass, so as to have an idea of the associated stability or instability.

The rock mass conditions in the Poor to Fair rock mass range are considered suitable only for a man-entry method where conditions can be well controlled, such as mechanized cut-and-fill.

The current analysis aims to validate the drifts dimensioning defined for the 2020 FS. For that, the Q' value was obtained from the geotechnical characterization using RMR76, particularly considering GTU-2 as the most frequent geotechnical unit in the deposit.

Iso-probability contours, which relate the stability number and the hydraulic radius, were used to calculate drift dimensions stability for stable cases (Figure 16-11; Table 16-7).

Figure 16-11: Iso-Probability Contours for Stable Cases (Mawdesley, 2001).

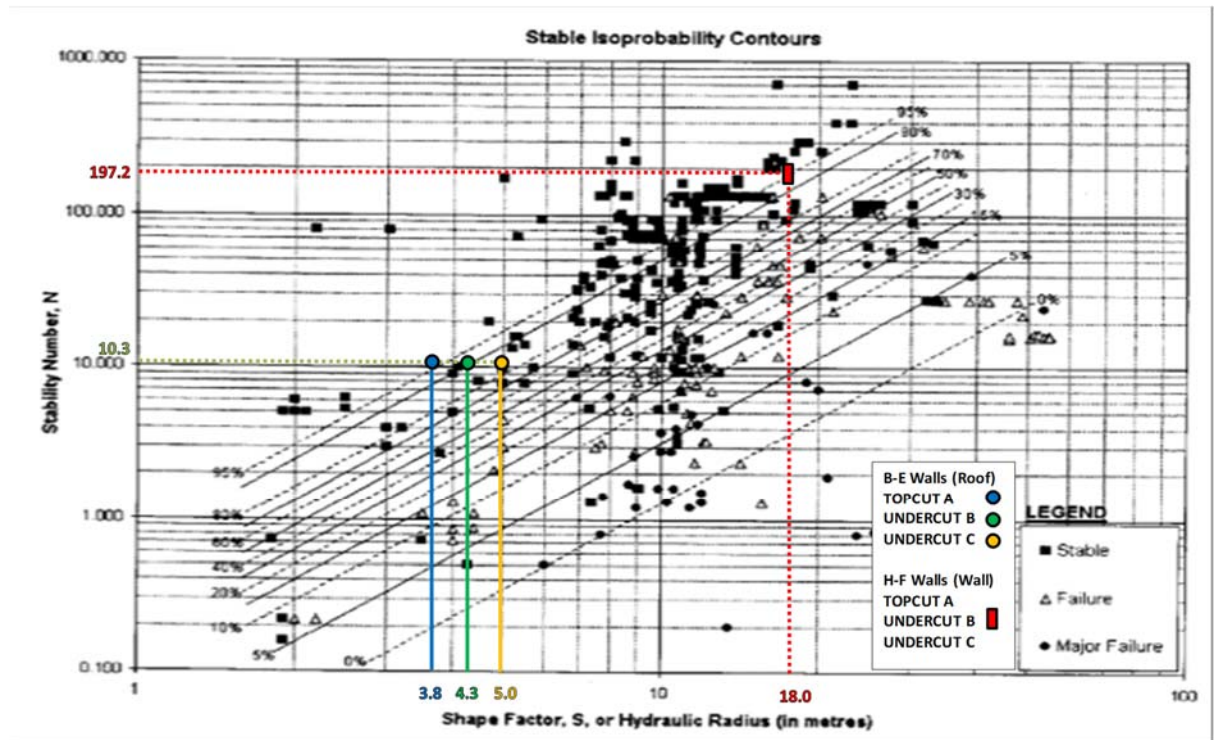

Note: Figure prepared by GMS, 2020, after Mawdesley, (2001).


Table 16-7: Iso-Probability Contours for Stable Cases Results

Drift	B-E Walls (Roof)	H-F Walls (Wall)
	Stable (%)	Stable (%)
Topcut A	>95	>95
Undercut B	≈90	>95
Undercut C	≈80	>95

The results show that, for the current dimensions, the hanging wall and foot wall would present a probability of stability of more than 95%, and the back and end walls would present a probability of stability of more than 95% for Topcut A, of around 90% for Undercut B, and of around 80% for Undercut C.

The iso-probability contours for failure cases are shown in Figure 16-12 and Table 16-8.

Figure 16-12: Iso-probability contours for failure cases (Mawdesley, 2001).

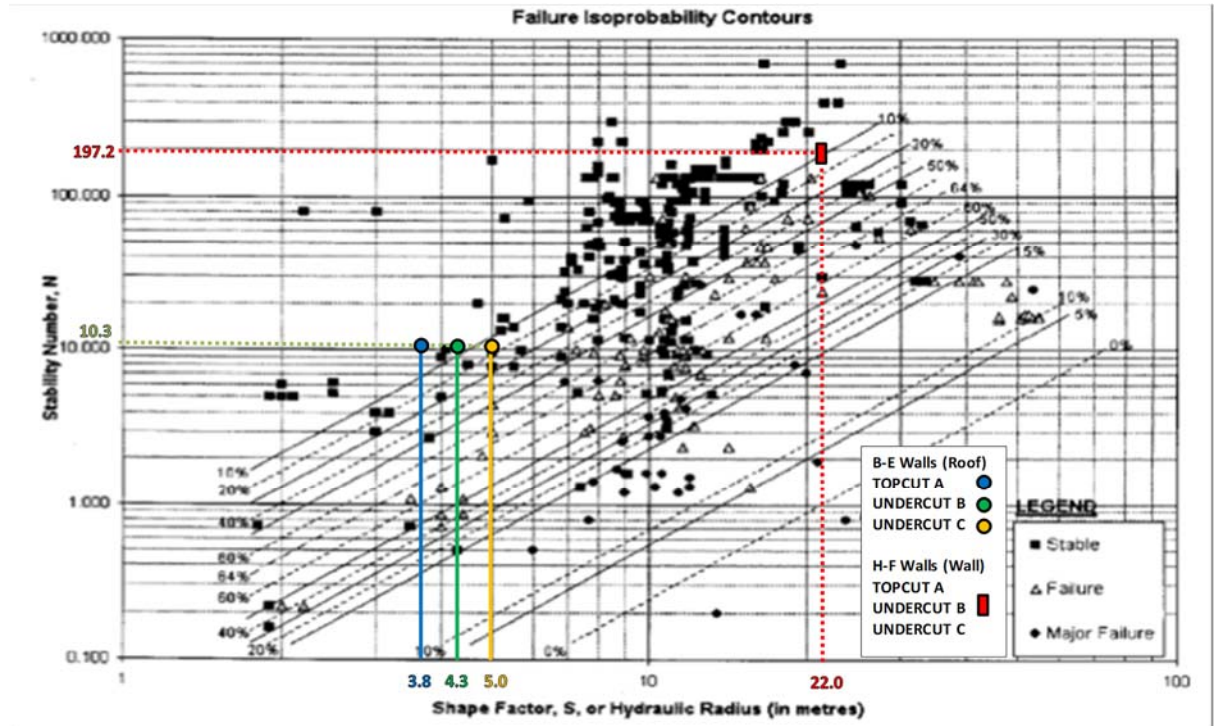

Note: Figure prepared by GMS, 2020

Table 16-8: Iso-Probability Contours for Failure Cases Results

Drift	B-E Walls (Roof)	H-F Walls (Wall)
	Failure (%)	Failure (%)
Topcut A	<10	<10
Undercut B	<10	<10
Undercut C	≈20	<10

The results show that, for the current dimensions, the Hanging and Foot Walls would present a probability of failure of less than 10%, and the Back and End Walls would present a probability of failure of less than 10% for Topcut A and Undercut B, and of around 20% for Undercut C.

16.4 Numerical Modelling

Numerical assessments using RS2 and FLAC3D have been completed to evaluate the extraction sequence, decline ramp and drift stability, stress migration, potential damage to infrastructure, and subsidence, even though the mine will be at relatively shallow depths (500–900 ft below ground surface).


To complement empirical methods and validate the support design, a detailed two-dimensional numerical analysis was carried out using the RS2 program (Rocscience, 2020). The purpose of these

numerical models is to assess the effect of the in-situ stress on the excavation and the response of the reinforcement and support elements.

The results for the decline ramp (Figure 16-13) indicate the following:

- In general, the maximum principal stress (S1) contours show high compressive stresses at the toe of the walls and above the roof at 1.6 ft, and a relaxation of stresses in the walls and the bottom;
- The minimum principal stress (S3) contours show a complete relaxation of stresses around the walls, the bottom, and the roof. Therefore, no tensile stress problems are revealed;
- The strength factor (SF) is higher than 1.0 around the walls and roof, with only the bottom presenting values close to 1.0. However, there is a concentration of shear and tension yielding points. Yielding points reach up to 1.3 ft over the roof and 2.6 ft around the walls;
- Displacement (D) contours show a maximum >1 cm in the walls and bottom.

Figure 16-13: Modeling Results for Decline Ramp; a) Major Principal Stress, S1; b) Minor Principal Stress, S3; c) Strength Factor, SF; d) Displacements, D.

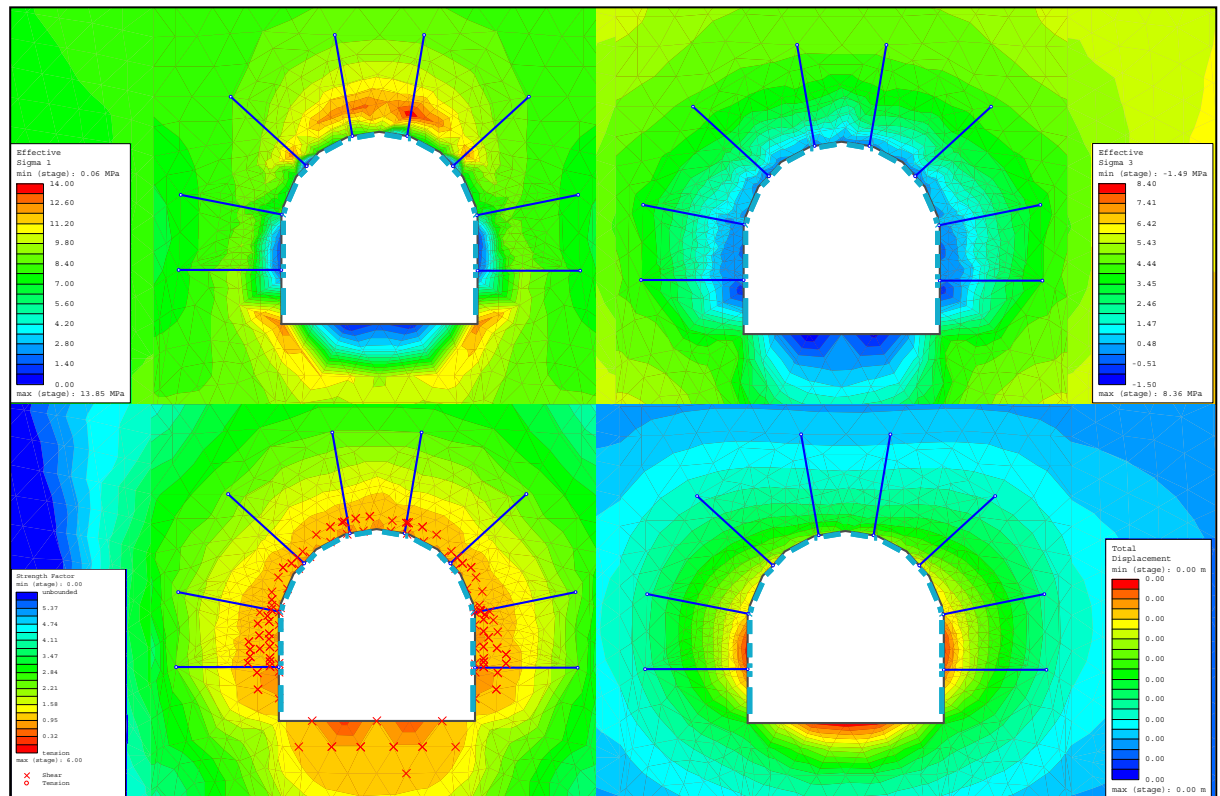


Note: Figure prepared by GMS, 2020.

The results for Topcut A (Figure 16-14) indicate the following:

- In general, the maximum principal stress (S1) contours show high compressive stresses on the shoulders and a relaxation of stresses in the walls, the bottom, and the roof;
- The minimum principal stress (S3) contours show a zone with tensile stress on the shoulders and relaxation of stresses around the walls, the bottom, and the roof. Therefore, no major tensile stress problems are revealed;

- The strength factor (SF) is higher than 1.0 around the walls and roof, with only the bottom presenting values close to 1.0. However, there is a concentration of shear and tension yielding points. Yielding points reach up to 1.2 ft over the roof and 1.0 ft around the walls;
- Displacement (D) contours shown a maximum >1 cm in the walls, the bottom, and the roof.

Figure 16-14: Modeling Results for Topcut A; a) Major Principal Stress, S1; b) Minor Principal Stress, S3; c) Strength Factor, SF; d) Displacements, D.

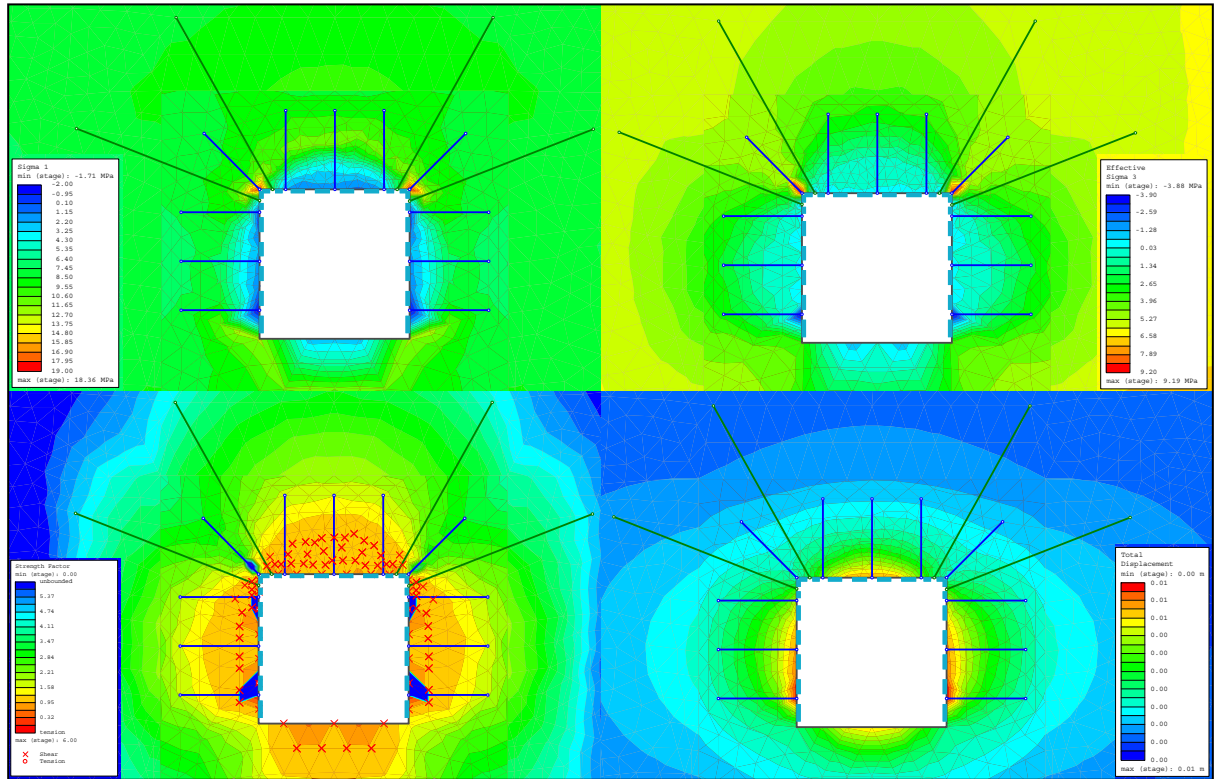


Note: Figure prepared by GMS, 2020

The results for Undercut B (Figure 16-15) indicate the following:

- In general, the maximum principal stress (S1) contours show high compressive stresses on the shoulders and a relaxation of stresses in the walls, the bottom, and the roof;
- The minimum principal stress (S3) contours show a zone with tensile stress on the shoulders and a relaxation of stresses around the walls, the bottom, and the roof. Therefore, no major tensile stress problems are revealed;
- The strength factor (SF) is higher than 1.0 around the walls and roof, with only the bottom presenting values close to 1.0. However, there is a concentration of shear and tension yielding points. Yielding points reach up to 2.0 ft over the roof and 1.2 ft around the walls;
- Displacement (D) contours shown a maximum > 1 cm in the walls, the bottom, and the roof.

Figure 16-15: Modeling Results for Undercut B; a) Major Principal Stress, S1; b) Minor Principal Stress, S3; c) Strength Factor, SF; d) Displacements, D.

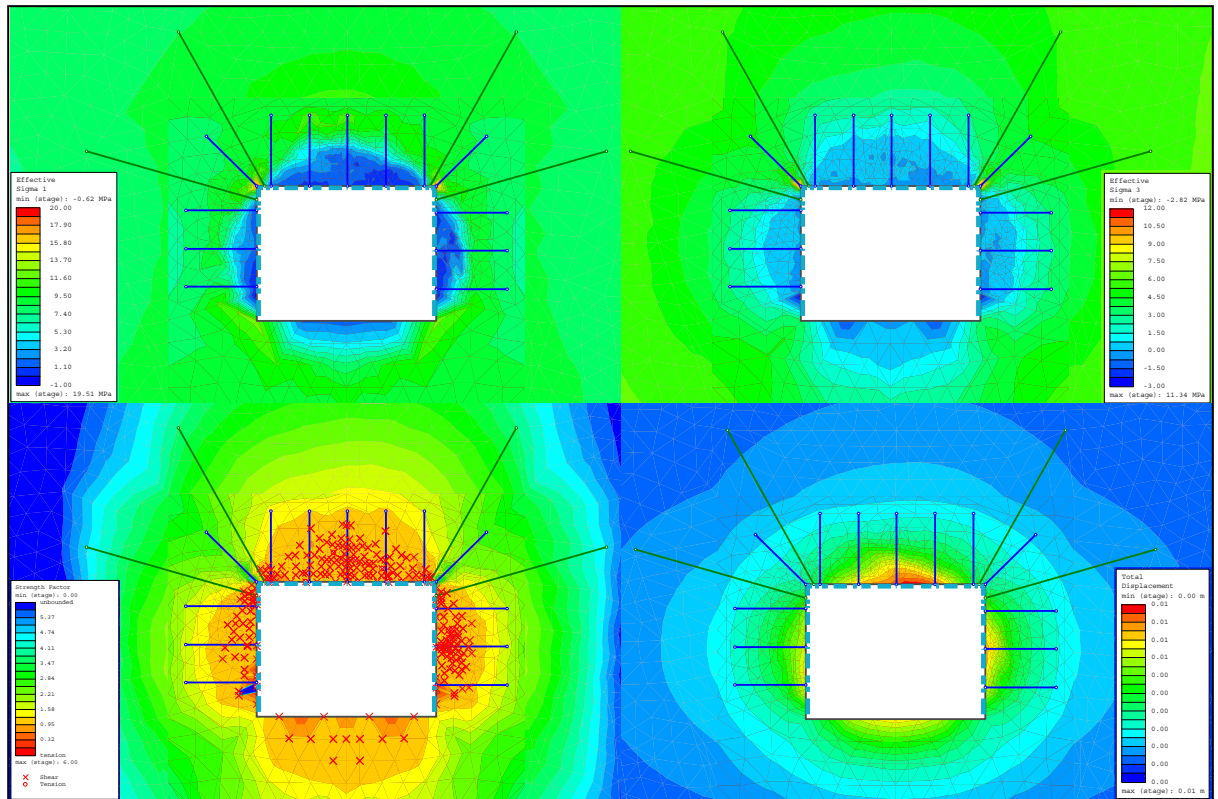


Note: Figure prepared by GMS, 2020.

The results for Undercut C (Figure 16-16) indicate the following:

- In general, the maximum principal stress (S1) contours show high compressive stresses on the shoulders and a relaxation of stresses in the walls, the bottom, and the roof;
- The minimum principal stress (S3) contours show a zone with tensile stress on the shoulders and relaxation of stresses around the walls, the bottom, and the roof. Therefore, no major tensile stress problems are revealed;
- The strength factor (SF) is higher than 1.0 around the walls and roof, with only the bottom presenting values close to 1.0. However, there is a concentration of shear and tension yielding points. Yielding points reach up to 2.5 ft over the roof and the bottom, and 1.2 ft around the walls;
- Displacement (D) contours shown a maximum >1 cm in walls, the bottom, and the roof.


Figure 16-16: Modeling Results for Undercut C; a) Major Principal Stress, S1; b) Minor Principal Stress, S3; c) Strength Factor, SF; d) Displacements, D.

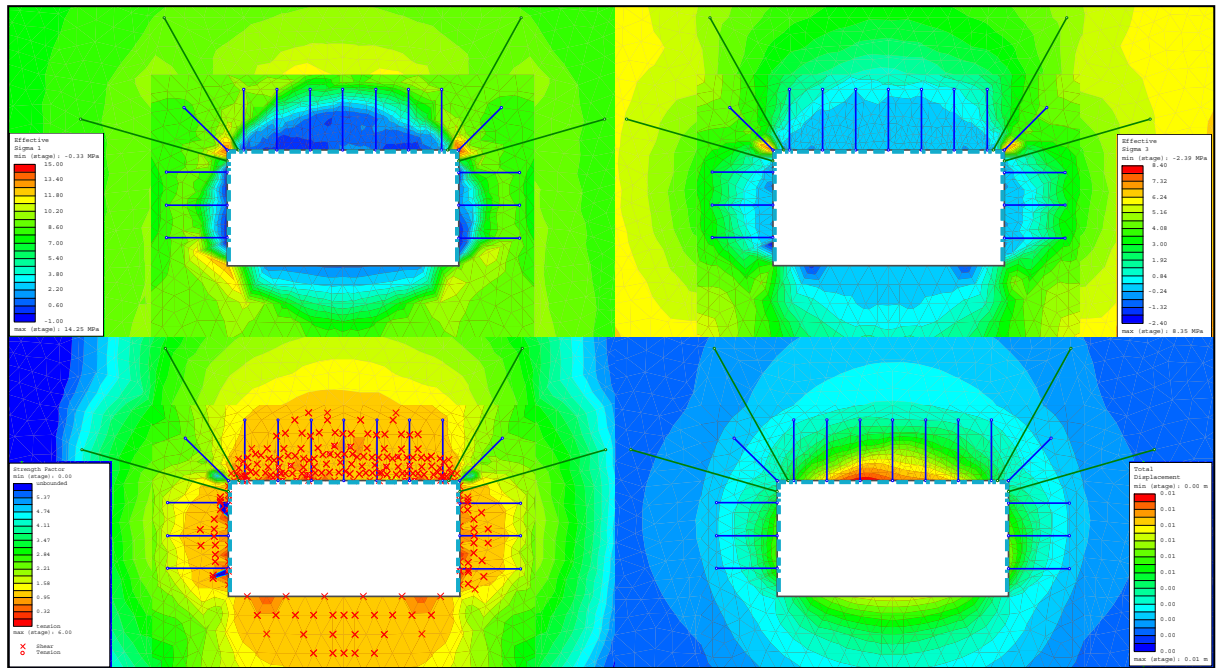

Note: Figure prepared by GMS, 2020

To optimize the mine design and mine plan, a three-dimensional model considering finite difference (Figure 16-17) was developed using the Flac 3D v.5.01 Program (Itasca, 2015).

Figure 16-17: Three-Dimensional Model of Finite Difference

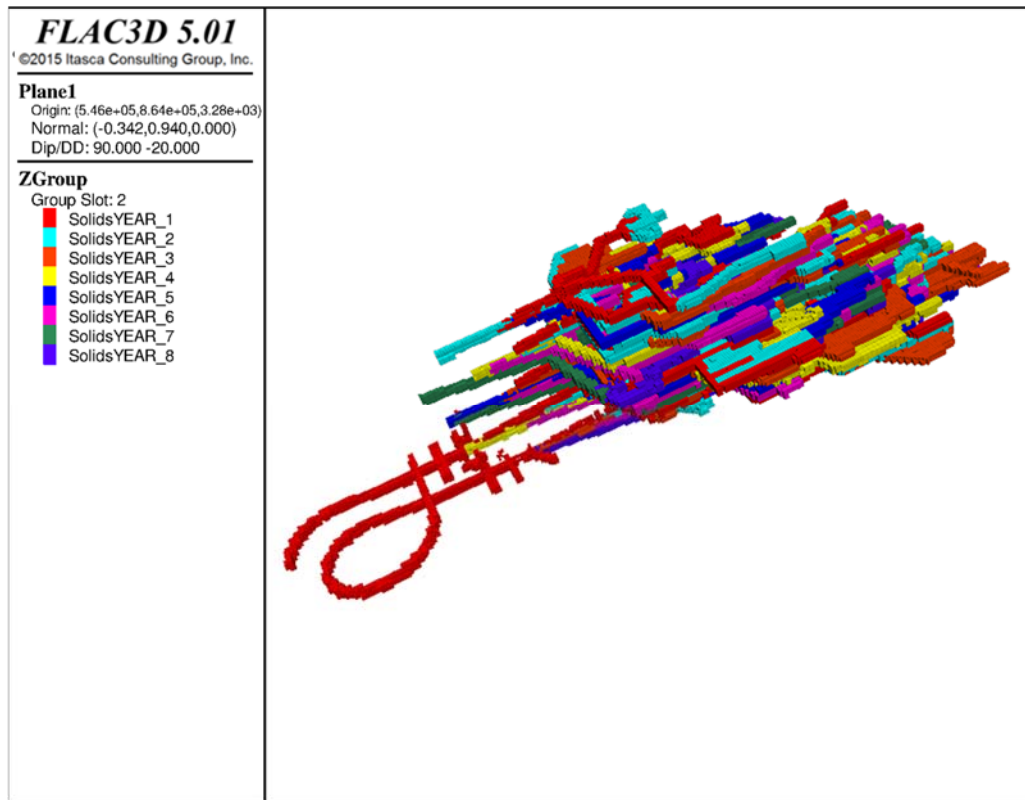

Note: Figure prepared by GMS, 2020.

The model was developed to perform the parametric analysis of the mine design and mine plan according to the excavation and backfill process for the life-of-mine (LOM). In addition, potential caving on surface was assessed using the model results.

Excavation of adjacent drifts could not only result in loss of backfill strength, it could also generate high levels of stress, resulting in rock mass damage and possible poor excavation performance related to low-strength rock mass. Maintaining at least three horizontal drifts of distance between excavations would help to cut off the horizontal stresses acting across the deposit.

Rock mass damage will be particularly prevalent in the excavation intervals located within the fault zones adjacent to advancing drifts. These cross-cut intervals will need to be well supported during initial development and may need rehabilitation in the more critical closure areas.

In general, the reduction in the mining stresses around excavations is more likely to adversely affect the stability of the areas immediately above the cut and fill mining areas. The failure modes in these areas are likely to be tensile failure and gravity-induced unravelling. Preventing these types of failure will require high levels of support.

FLAC3D code was specifically used to review the potential for movement along faults and the potential for surface subsidence. The excavation and backfilling sequences generate accumulated displacements of around 11–15 inches over the levels facing the north orientation of the mine. These displacements are considered the maximums identified in the global excavation of the model and represent a contour area of at least five levels higher. In spite of the maximum displacements identified, the displacements are expected to be overestimated because the numerical analysis was

modelled considering year-by-year excavation that strongly affects the rock mass displacement values. Therefore, the monthly excavation may present lower displacement values.

Subsidence caused by extraction could cause dilation or fracturing above the deposit and an increase in hydraulic conductivities and water inflows to the mine. Some level of dilation of fault and joint systems within the Grassy Mountain Formation can be expected as a result of mining. Under the current extraction sequence, this is expected to occur during the initial stages of mining. The ground surface presents contour displacements of around 0.4–9.8 inches from year 1 to year 5 (increasing in lineal proportion), but from year 5 to year 8, the contour displacements are projected to stabilize at around 9.8 inches.

GMS noted the following:

- Based on the prevailing ground conditions in the Poor rock conditions, cut and fill headings are recommended (30 ft wide x 15 ft high maximum dimension stope allowed). These dimensions will ensure that good quality backfill practices can be maintained through tight filling to manage open spans, side wall stability, and ultimately the stability of the mining area. Smaller spans will require less ground support to ensure that cycle times and productivity are maintained.
- The stand-off distance for long-term critical excavations, including decline ramp and ventilation shafts, is recommended to be 200 ft from the drifts. For permanent foot wall drives, a 100 ft stand-off is recommended.

To ensure stability during the mine sequence, lateral rock pillars should be wider than three drifts wide. These rock pillars known as Rib Pillar, also maintain control of mining and reduce possible high stress concentrations around the drifts in mining and backfilling process. This is primarily dictated by the potential range of Fair–Poor rock mass conditions (especially near faulted areas).

GMS considers that the best approach to manage risk in this environment is to plan a more conservative approach to the drift design and extraction sequence. The high-grade nature of the deposit means that ore recovery is critical to maintaining the grade profile, and the stability and final recovery of drifts in the variable rock mass could be very challenging.

16.4.1 Ground Support

The ground support design considers industry-standard empirical guidelines and GMS's experience in variable ground conditions. The ground support philosophy for underground excavations is sprayed concrete lining (fiber-reinforced shotcrete) with bolts installed through the concrete. Sprayed concrete was selected for overall simplicity and speed of application, longevity of surface support, and sealing of rock blocks that may potentially fall from the roof and walls.

Enhanced ground support for poor ground areas includes the installation of initial (pre-support), thicker shotcrete, reduced bolting spacing, and Swellex-type bolting. Cable bolts are considered for overstressed accesses, cross-cuts in cut and fill areas, and drifts under rock mass environments (particularly the roof). Table 16-9 and Table 16-10 provide the support designs under rock mass and backfill environments, respectively.

Table 16-9: Reinforcement and Support Design for Mine Development Under Rock Mass Environment

Excavation	Section (ft)	Bolts Length (ft)	Bolts Pattern (ft)	Cable Bolts (ft)	Cable Pattern (ft)	Fiber-Reinforced Shotcrete (Inches)	Mesh ⁽¹⁾
Decline	15	7.9	4.3 x 4.3	No	8.2 x 8.2	4	Yes
Access (top)	15	7.9		19.7			
Access (under)	15	7.3		No			No
Topcut A	15	7.9		19.7			
Undercut B	20	8.4 ⁽²⁾		19.7			
Undercut C	30	9.3 ⁽²⁾		19.7			

Note: (1) Galvanized welded wire mesh. (2) Final length should be defined in-situ by geotechnical engineer on site according to Boltec equipment to use (at this stage was necessary to use 7.9 ft. length as maximum bolt length).

Table 16-10: Reinforcement and Support Design for Mine Development Under Backfill Environment.

Excavation	Section (ft)	Bolts Length (ft)	Bolts Pattern (ft)	Cable Bolts (ft)	Cable Pattern (ft)	Fiber-Reinforced Shotcrete (inches)	Mesh ⁽¹⁾
Topcut A ⁽³⁾	15	7.3	4.3 x 4.3	No	No	2	No
Undercut B ⁽³⁾	20	7.5					
Undercut C ⁽³⁾	30	8.0 ⁽²⁾					

Note: (1) Galvanized welded wire mesh. (2) Final length should be defined in-situ by geotechnical engineer on site according to Boltec equipment to use (at this stage was necessary to use 7.9 ft. length as maximum bolt length). (3) Shotcrete and bolts in rock walls (not at CRF roof and/or walls).

Long-standing temporary development, over-stressed accesses, and cross-cuts in closure areas would require some level of rehabilitation. This has been estimated as at least 30% of cross-cuts (in Poor and Fair–Poor rock conditions). A rehabilitation requirement for permanent development should also be considered and estimated based on the linear feet of development completed in Poor rock conditions (mainly close to the North fault and the Grassy fault).

16.4.2 Ground Monitoring Program

Due to the rock quality and strength issues summarized in Sections 16.2 and 16.2.8, it will be necessary to install rock stability monitoring instrumentation in the Grassy Mountain underground workings to monitor the geotechnical behavior of pillars in the different mined areas and backfilled areas. The configuration considers that data collection will be manual and continuous, and its ongoing interpretation will be the responsibility of the mine operation. The instrumentation may be installed as the lower levels are developed and should focus on measuring the deformations and stresses that may develop during mining operations.

The Grassy Mountain instrumentation program will consider, at least, the following:

- Underground monitoring;
- Geotechnical inspections and permanent ground control during the operation;
- Preparation of procedures for systematic convergence and stress changes measurements;

- Topographic monitoring using total station, where the convergence of the decline ramp and drifts development will be surveyed through the laser scanner;
- Deformation monitoring using a tape extensometer, measuring stations every 98 or 164 ft, depending on visual availability. This monitoring will be correlated with the topographic monitoring;
- In-situ stress testing using overcoring. This will indicate those sectors subject to significant changes in compression or relaxation due to stress redistribution during drift mining. This will be done twice a year by an external service to update the in-situ stress condition;
- Surface monitoring:
 - Visual inspection of settlements and/or cracks on the surface;
 - Cross-crack measurements, either manual or by wireline extensometer;
 - Topographic monitoring using total station, where the surface deformation above the mine operation will be measured monthly through an on-site prism network;
- Satellite InSAR monitoring to measure the surface deformation of the general arrangement, especially the possible subsidence above the underground portion of the mine. This will be an external service performed once a year, and the measures will be correlated with the topographic measuring above the mine.

16.4.3 Global Extraction Sequence

The mine should be programmed with fast drifts advances, keeping the initial support to the excavation face, the reinforcement, and the final support at 40 ft as the maximum allowed. The backfill should be installed in reverse and according to schedule, to avoid damage from side drifts excavation, that affects its strength and/or its attachment to the bedrock.

Special care should be taken of stability as excavations advance in areas where the North and Grassy faults are present and in the area between them, due to the Poor quality of the rock mass conditions. Sub-parallelism between drifts and these faults result in slow excavations under poor geotechnical conditions with a high risk of instability in roofs and walls during excavation, according to the trace of the fault. In general, the deposit presents this sub-parallelism condition for the mine design, so it is estimated to be a general operational condition for the mine.

If considered, the presence of a water surface in the upper levels of the mine is an additional variable to the probable instability conditions in the drifts, so it will be necessary to implement and maintain a rigorous operation.

Compromises have been made in the extraction sequence as a result of the need to balance grade and production profiles, extraction of wide orebody areas, and other geotechnical constraints. Ultimately, some aspects of the sequence may not be geotechnically optimal, and additional analyses or designs may be required.

16.5 Portal Design

The portal excavation and soft ground tunneling design was initially done by Ausenco during the 2018 PFS and its stability checked by GMS during the Consolidated Permits stage.

The portal is designed to allow access to the underground mine facilities while providing adequate space for equipment and vehicles. It will be located uphill and approximately 750 ft south of the primary crusher, at an approximate elevation of 3,749 ft. The portal pad was designed with a 1% inclination toward outside, to allow storm water to flow away from the portal and toward the storm water drainage ditches. The portal pad will have sufficient space to install the required ventilator infrastructure to be

used during the excavation of the decline ramp, construction facilities, and to allow the safe transit of the development equipment. The pad area was expanded from the initial area designed during the Consolidated Permits process to allow more space for facilities. In addition, the general cut design was updated, increasing the total area of the portal and the excavation volume.

The portal will have a waste rock excavation volume of 1,120,305 ft³, which will be transported and disposed of in the waste rock dump facility designed for the mine operations.

Weak rock mass ground conditions at the portal require that a shallow box-cut excavation be established to form a suitable face where tunneling can occur. Specialized soft ground tunneling techniques with full rock reinforcement and support will then be required to advance the tunnel for an approximate 33 ft decline distance, to a point where conventional drill and blast tunneling can begin.

The current design is considered suitable for the feasibility level. Additional work has been proposed to bring the design to construction level, including a numerical modeling of the excavation sequence to be completed prior to the start of pre-construction. Then, during the construction perform site investigations such as bench geotechnical mapping, portal slope re-design (if necessary), and numerical re-modeling of the excavation.

16.6 Grade Control

The grade control will be done by the geologist daily. The geologist will collect samples from all producing stopes and send them to an assay laboratory. The assay grades will be compared to the anticipated grades in the resource block model to monitor the accuracy of the model and maintain the desired head-grade.

When a production stope gets within two rounds of the design, the stope will go on grade control. When a stope is on grade control, every round must be sampled before the next round can be drilled. The stope may end prematurely or extend past the design if the assayed grade is below or above the cut-off grade.

16.7 Development Design

16.7.1 Mine Design Parameters

The Grassy Mountain orebody will be accessed using a 15 x 15 ft main decline, developed from a portal on surface. The decline will provide the connection to all services. The design intent is to have the decline located as close as possible to the mineralization in order to reduce transportation costs, but sufficiently removed from mining activities to ensure that the decline is geotechnically stable for the planned LOM. A summary of the mine design criteria is shown in Table 16-11.

Table 16-11: Mine Design Parameters


Design Parameters	Width (ft)	Height (ft)	Diameter (ft)	Length (ft)	Maximum Gradient (%)
Decline	15	15	NA	varies	15
Level access	15	15	NA	varies	12.5
Power station	15	15	NA	50	0
Level station	15	15	NA	105	0
Stockpile	15	15	NA	50	0
Sump	15	15	NA	50	12
Truck loading bay	15	15	NA	50	0
Ventilation bay	15	15	NA	varies	0
Ventilation raise	NA	NA	12	varies	vertical
Topcut A	15	15	NA	varies	0
Undercut B	20	15	NA	varies	0
Undercut C	30	15	NA	varies	0
Decline turning radius	NA	NA	100	NA	NA

Note: NA = not applicable

16.7.2 Level Access

The level station will have a standoff distance from the orebody of approximately 300 ft. This distance is determined by the maximum gradient of the level access of 12.5%, the geometry of accessing five levels for every one level station, and the geometry of the orebody as shown in Figure 16-18. Therefore, the standoff distance of 300 ft varies slightly depending on these inputs.

Figure 16-18: Level Access Layout (Looking North)

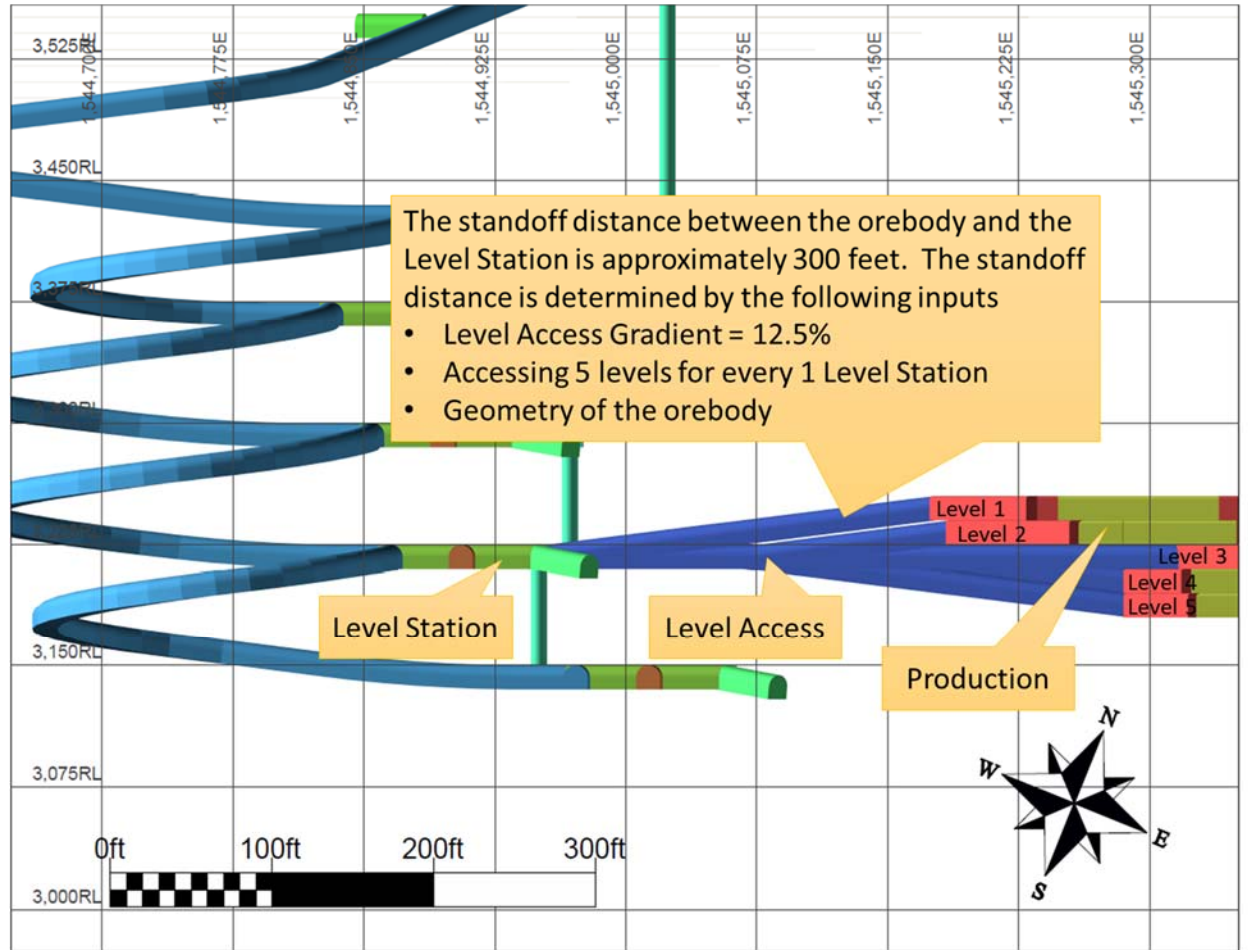


Note: Figure prepared by MDA, 2020.

16.7.3 Station Design

There are five stations planned for the mine. Each station will access up to five production levels. The stations will be on the following levels: 3420, 3360, 3285, 3210, and 3135. Each station is to be accessed via the decline. Each station will have a truck loading bay, power bay, ventilation access, stockpile, sump, and level access as shown in Figure 16-19.

Figure 16-19: Station Design

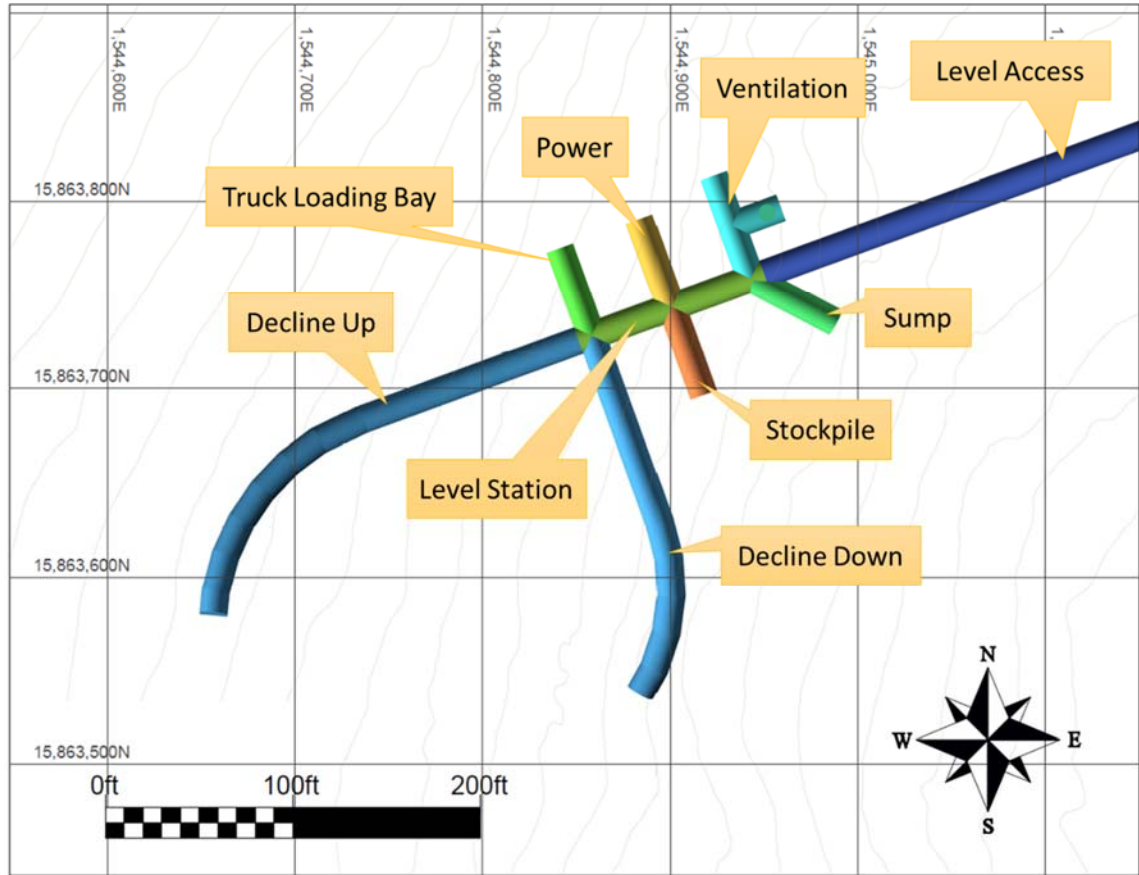

Note: Figure prepared by MDA, 2020.

The truck loading bay will be used to load trucks with load-haul-dump (LHD) vehicles. The power bay will be used to store the mobile load center. The ventilation access will connect on each station via the vent raises. The sump is designed at a -12% gradient and will be used to collect mine water. The stockpile will be used to store material until it can be loaded into trucks. The level access will provide access to the production stopes.

16.8 Equipment Selection

Mine operations will be based on the usage of mobile mining equipment suitable for underground mines. The estimate of the fleet size was based on first principles and equipment running-time requirements to achieve the mine production plan. The estimate of the running time for the mine equipment was conducted through the usage of mine-operating factors. Maximum permanent equipment quantities are summarized in Table 16-12.

Table 16-12: Equipment Selection

Underground Mining Equipment	Model	Quantity
Dual (drill + bolter)	Resemin Troidon 88 Dual	3
LHD 5.2 cubic yards	CAT R1600	4
Front-end loader	CAT 962H	1
Truck with ejector bed	CAT AD22	3
Emulsion loader	CAT 440	1
Telehandler	JCB 540-170	2
Dozer	CAT D6T	1
Motor grader	Paus PG5HA	1
4WD twin cab truck	Ford F-150	1
Mine rescue truck	Ford F-150	1
Diamond drilling	Hydracore Gopher	1
Shotcrete sprayer	Normet Spraymec 8100 VC	1
Shotcrete truck	Normet Utimec SF 300	1
Lube truck	Normet Multimec MF 100	1
Water truck	Normet Multimec MF 100	1
Van man-transport	Ford SPLORDER	3

16.9 Production and Development Productivity Assumptions

16.9.1 Drilling and Bolting

Production and development drilling and bolting will be done using three Resemin Troidon 88 Duals as shown in Figure 16-20.

Figure 16-20: Resemin Troidon 88 Dual



Note: Figure provided by MDA, 2020, after Western States Equipment Company quote, 2020.

The Dual is a newer concept that has two booms. One boom is a drilling boom and the other boom is a bolting boom. The dual can setup in a heading and bolt the back and then drill the face all in one setup. Resemin is based in Peru and has been making mining equipment for 30 years. Drilling and bolting productivities were built up from first principles and vary by heading profile. The results from the first principles are summarized in Table 16-13 and Table 16-14. The bolting requirements were determined from the geotechnical analysis.

Table 16-13: Drilling First Principles Assumptions

Drilling	Units	Development	15 Topcut	20 Undercut	30 Undercut
Penetration rate	ft/min	5.7	5.7	5.7	5.7
Effective time	%	80	80	80	80
Penetration rate	ft/min/eff	4.6	4.6	4.6	4.6
Non-drill time	min	60	60	60	60
Hole length	ft	11	11	11	11
Holes per round	holes	53	50	61	85
Length per round	ft	583	550	671	935
Time per round	min/rd	188	181	207	265
Time per round	hr/rd	3.1	3.0	3.5	4.4
Operating hours per shift	hr	10	10	10	10
Rounds per shift	rd/shift	3.2	3.3	2.9	2.3
Tons per round	tons/rd	161	179	239	359
Tons per hour	tons/hr	51	59	69	81

Table 16-14: Bolting First Principles Assumptions

Bolting	Units	Development	15 Topcut	20 Undercut	30 Undercut
Bolting rate	bolts/min	0.2	0.2	0.2	0.2
Effective time	%	80	80	80	80
Bolting rate	bolts/min	0.16	0.16	0.16	0.16
Non-bolting time	min	45	45	45	45
Bolts per round	bolts/rd	27	33	36	42
Time per round	min/rd	214	251	270	308
Time per round	hr/rd	3.6	4.2	4.5	5.1
Operating hours per shift	hr	10	10	10	10
Rounds per shift	rd/shift	2.8	2.4	2.2	2.0
Tons per round	tons/rd	161	179	239	359
Tons per hour	tons/hr	45	43	53	70

16.9.2 Shotcrete

Production and development shotcrete will be sprayed using a Normet Spraymec-8100 as shown in Figure 16-21.


Figure 16-21: Normet Spraymec 8100



Note: Figure provided by MDA, 2020, after Normet, 2014 (Normet Spraymec 8100 VC Technical Data Sheet #100075525).

The haulage of the shotcrete will be done using a Normet Utimec SF-300 Transmixer as shown in Figure 16-22.

Figure 16-22: Normet Utimec SF 300 Transmixer

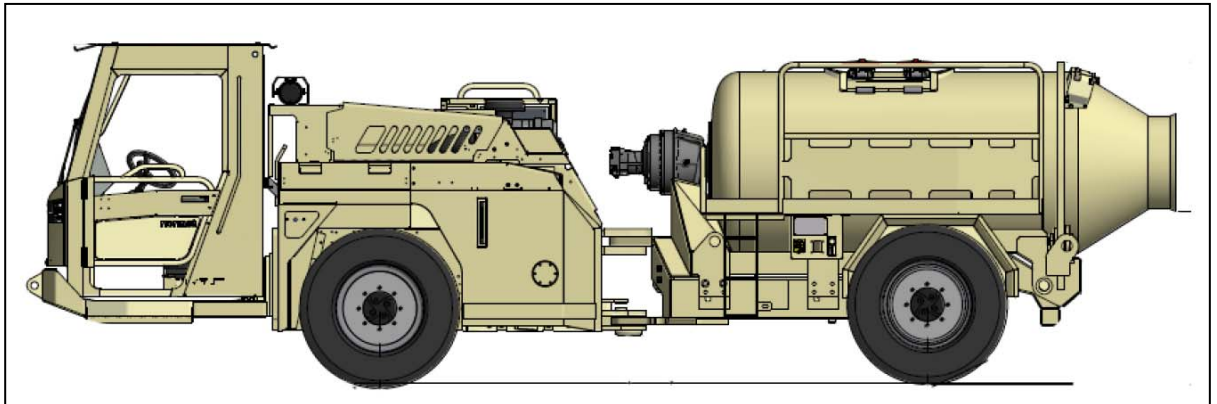

Note: Figure provided by MDA, 2020, after Normet, 2017 (Normet Utimec SF 300 Transmixer Technical Data Sheet #100109723).

Shotcrete sprayer productivities were built up from first principles and vary by heading profile. The results from the first principles are summarized in Table 16-15 and Table 16-16. The transmixer productivities are based on ton*miles. The distances used for the ton*mile calculation are shown in Figure 16-23.

Table 16-15: Shotcrete First Principals Assumptions

Shotcrete Spray	Units	Development	15 Topcut	20 Undercut	30 Undercut
Shotcrete rate	ft ³ /min	2.5	2.5	2.5	2.5
Effective time	%	80	80	80	80
Shotcrete rate	ft ³ /min	2	2	2	2


Non-shotcrete time	min	30	30	30	30
Shotcrete per Round	ft ³ /rd	166	186	207	250
Time per round	min/rd	113	123	134	155
Time per round	hr/rd	1.9	2.1	2.2	2.6
Operating hours per shift	hr	10	10	10	10
Rounds per shift	rd/shift	5.3	4.9	4.5	3.9
Tons per round	tons/rd	161	179	239	359
Tons per hour	tons/hr	85	87	107	139

Note: rd = round.

Table 16-16: Transmixer First Principle Assumptions

Haulage Transmixer	Units	Quantity
Truck capacity	tons	5.5
Fill efficiency	%	90%
Truck capacity	tons	5.0
Average speed	mph	4
ton*miles per hour	ton*miles/hr	20

Figure 16-23: 3360 Shotcrete Thickness (units in inches)

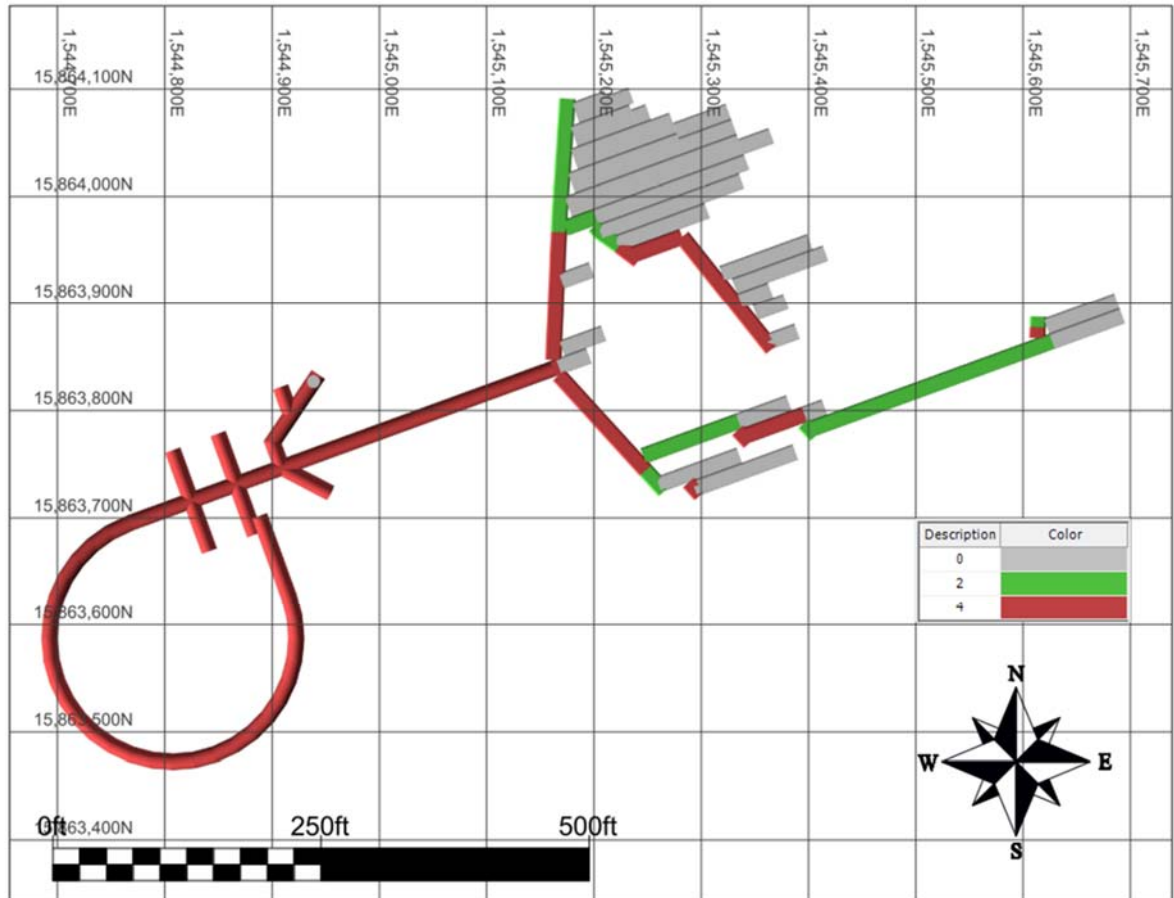

Note: Figure prepared by MDA, 2020.

The location and thickness of shotcrete was based on geotechnical recommendations:


- All long-term development will receive 4 inches of shotcrete;
- All access drifts will receive 4 inches of shotcrete;
- All stope accesses not under backfill will receive 4 inches of shotcrete;
- All stope accesses under backfill will receive 2 inches of shotcrete on the ribs.

An example of the shotcrete application is shown in Figure 16-23.

16.9.3 Blasting

Emulsion will be used for most production blasting and development rounds. A CAT 440 with an emulsion configuration will be used for blasting as shown in Figure 16-24.

Figure 16-24: CAT 440 with Emulsion Configuration

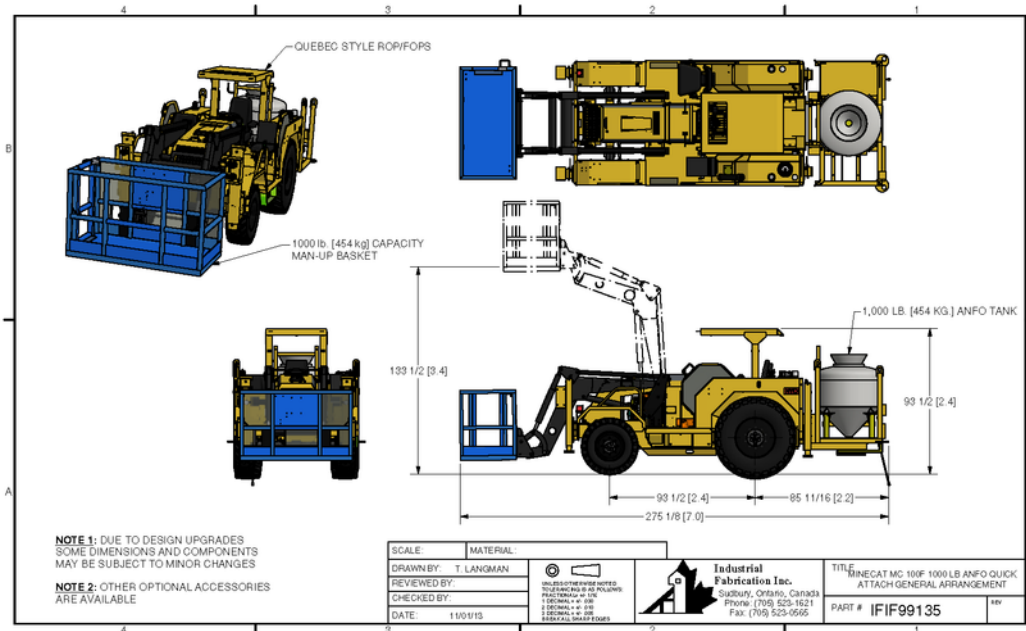

Note: Figure provided by MDA, 2020, after Industrial Fabrication Inc., 2013 (Industrial Fabrication Inc. #IFIF99135).

Boosters, primers, detonators, detonation cord, and other ancillary blasting supplies will also be required. Bulk explosives will be stored in a secure powder magazine on surface in accordance with current applicable explosives regulations.

Once the drilling cycle is complete, the emulsion blasting agent will be loaded into the holes with the respective nonel blasting cap and booster. The timing of the round with the nonel caps is extremely important as it is critical to pulling the maximum amount of distance per round.

Blasting will occur on-demand throughout the shift. Before blasting occurs, any affected areas will be cleared of personnel and the blasting location will be announced over the mine communication system. After the blast, an appropriate amount of time must pass to provide adequate ventilation to any affected areas before mining can resume. Blasting productivities were built up from first principles and vary by heading profile. The results from the first principles are summarized in Table 16-17.

Table 16-17: Blasting First Principles Assumptions

Blasting	Units	Development	15 Topcut	20 Undercut	30 Undercut
Loading rate	ft/min	8	8	8	8
Effective time	%	80%	80%	80%	80%
Loading rate	ft/min	6.4	6.4	6.4	6.4
Non-blasting time	min	30	30	30	30
Hole length	ft	10	10	10	10
Holes per round	Holes	52	49	60	84
Length per round	ft	520	490	600	840
Time per round	min/rd	111	107	124	161
Time per round	hr/rd	1.9	1.8	2.1	2.7

Blasting	Units	Development	15 Topcut	20 Undercut	30 Undercut
Operating hours per shift	hr	10	10	10	10
Rounds per shift	rd/shift	5.4	5.6	4.8	3.7
Tons per round	tons/rd	161	179	239	359
Tons per hour	tons/hr	87	101	116	134

16.9.4 Mucking

The CAT R1600 underground loader as shown in Figure 16-25 with a nominal 5.2 cubic yard bucket capacity will be used for all underground loading activities.

Figure 16-25: CAT R1600 Underground Loader



Note: Figure provided by MDA, 2020, after Caterpillar, 2011 (Caterpillar Technical Data Sheet #AEHQ6427-01).

Backfill placement will also be done using the same loader except the bucket will be replaced with a push plate.

The blasted material will be transported to the underground stockpile located on the level station using the loader. The material will then be loaded into haul trucks at the truck loading bay using the same loader. The material will then be transported to surface. The truck loading bay intersection will be excavated to a height of 16 ft to provide clearance to load the trucks.

Mucking productivities were built up from first principles and vary by heading profile. The results from the first principles are summarized in Table 16-18.

Table 16-18: Mucking First Principles Assumptions

Mucking	Units	Development	15 Topcut	20 Undercut	30 Undercut
Mucking rate	tons/hr	30	30	30	30
Effective time	%	80%	80%	80%	80%
Mucking rate	tons/hr	24	24	24	24
Non-mucking time	min	30	30	30	30
Tons per round	tons/rd	161	179	239	359
Time to muck a round	min/rd	433	478	628	928
Time to muck a round	hr/rd	7.21	7.96	10.46	15.46
Operating hours per shift	hr	10	10	10	10
Rounds per shift	Rd/shift	1.4	1.3	1.0	0.6
Tons per shift	t/shift	223	225	229	232
Tons per hour	tons/hr	19	19	19	19

16.9.5 Hauling

The haulage fleet will use CAT AD22 trucks as shown in Figure 16-26.

Figure 16-26: CAT AD22 Truck



Note: Figure provided by MDA, 2020, after Caterpillar, 2018 (Caterpillar Technical Data Sheet #AEHQ8139).

The CAT AD22 truck is a conventional low-profile underground-mining trucks with a nominal 22-ton capacity. The haul trucks will be equipped with an ejector bed for the use of dumping backfill in the headings. Trucks will be loaded at the truck loading bay. The trucks will transport the material to surface. Once unloaded on the surface, the trucks will be loaded at the backfill plant on surface and haul the backfill underground to a location that is undergoing backfilling.


Hauling productivities were built up from first principles. The results from the first principles are summarized in Table 16-19.

Table 16-19: Haulage First Principles Assumptions

Haulage Trucks	Units	Quantity
Truck capacity	tons	22
Fill efficiency	%	90%
Truck capacity	tons	20
Average speed	mph	6
Ton*miles per hour	ton*miles/hr	132

The haulage productivities were limited on ton-miles. The distance for the ton-mile calculation is shown in Figure 16-27. Each task was assigned a distance based on the group number shown in Figure 16-27.


Figure 16-27: Distances for the Ton*Mile Calculation

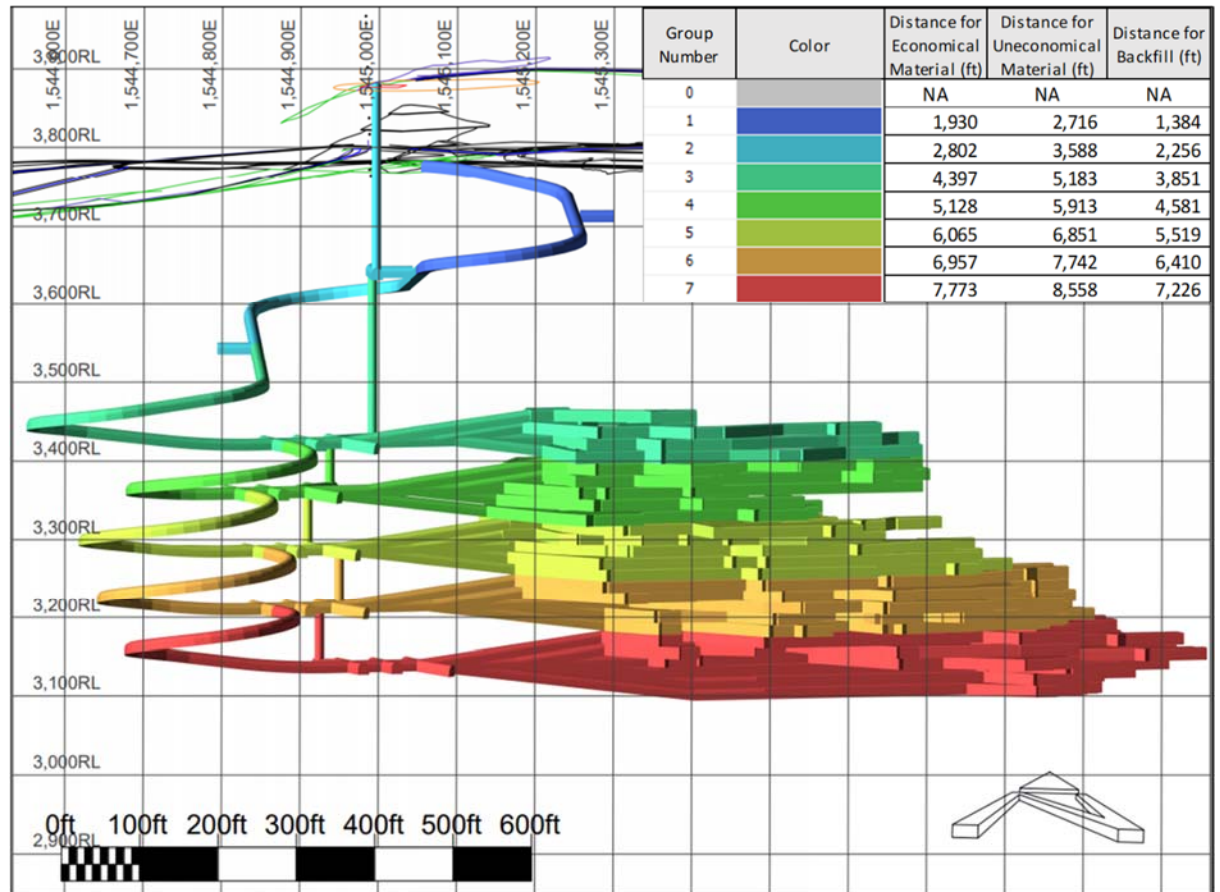

Note: Figure prepared by MDA, 2020.

Ore that is hauled to surface will be placed in the ore stockpile. A front-end surface loader will feed the ore from the stockpile into the primary crusher. Waste rock hauled to surface will be dumped at a waste-rock storage facility. The tonnage of waste hauled to surface over the LOM is summarized in Figure 16-28. This waste will be fully utilized over the mine life as cemented rock-fill material, reducing the total amount of borrow material required over the mine life.

Figure 16-28: Waste Haulage by Year

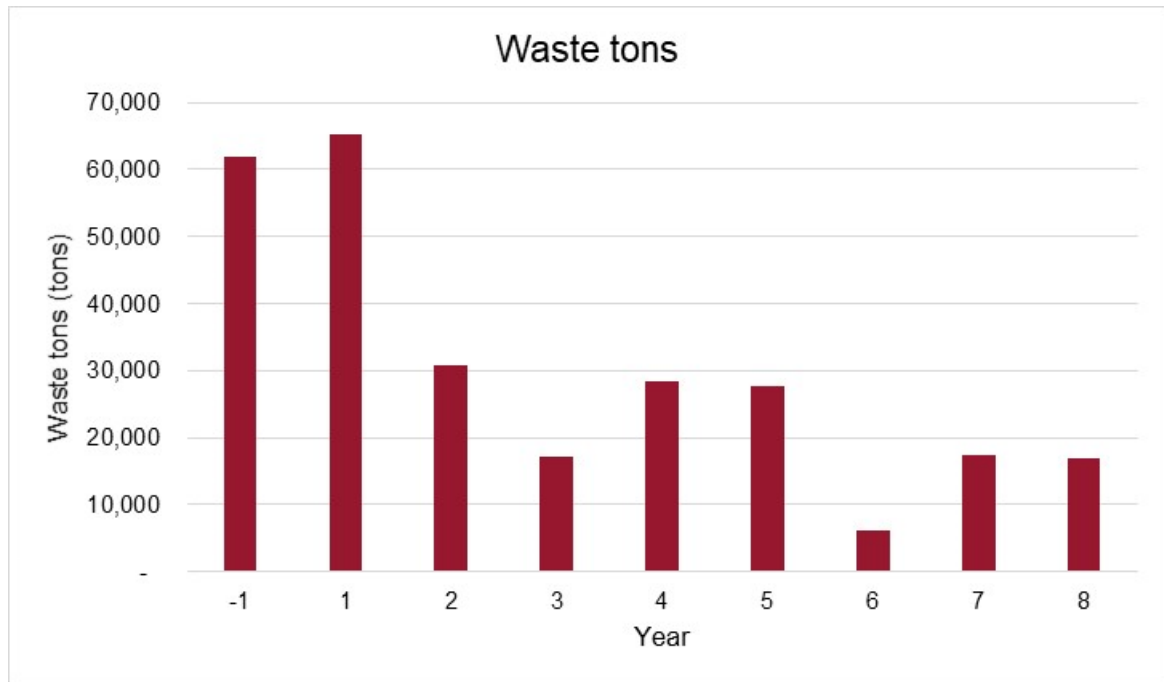

Note: Figure prepared by MDA, 2020.

16.9.6 Backfilling

Stopes are planned to be backfilled with CRF that will provide confinement on the stope walls.

The backfill method was selected based on the geological and geotechnical conditions of the deposit, as well as the selected mechanized cut and fill mining method. The main objectives of the backfill is to provide stability to the drifts and to control dilution associated with ore extraction.

Rock from a borrow pit close to the mine will be used as aggregate. An LHD equipped with a jamming boom and push plate will be used to place the CRF into the drifts.

Laboratory tests were conducted to define the CRF strength. For that, a testing plan was prepared for 12 CRF samples. The entire program involved different phases such as:

- Sieve analysis of the aggregate;
- Mixing of samples with two different compositions;
- Casting or molds preparation;
- Curing process;
- Mechanical properties measurements: laboratory testing.

The sieve analysis of the aggregate was conducted by PACS Laboratory. Approximately 1,392 kg of GM-1mix and 1,392 kg of GM-2 mix were sieved separately and entirely. The aggregate was tested in the “as received” moisture content condition with no drying or washing. Testing was conducted in general accordance with ASTM D-422 Particle Size Analyses of Soils and as specified by the testing plan on the following sieves:

- 3 inch (75 mm);
- 2 inch (50 mm);
- 1 ½ inch (37.5 mm);
- 1 inch (25.0 mm);
- ¾ inch (19.0 mm);
- ⅝ inch (9.5 mm);
- Number. 4 (4.75 mm);
- Number 10 (2.0 mm).

The aggregate used was compared using Talbot grading. The material used was rock Basalt from a borrow pit near the mine. The material was crushed to less than 4” and sent to MetaRock Laboratories in two (2) bag packages. The results show that the distribution is similar to the Talbot grading. Talbot and Richard (1923) proposed a general equation for combined (fine and coarse) regularly graded aggregate. Swan (1995) suggested that the Talbot grading equation can be used to make an optimal grading of waste rock for CRF design.

In general, for a CRF application, a particle size >10 mm is classified as a coarse aggregate, while a particle size of <10 mm is defined as a fine aggregate.

The UCS testing program included 12 samples with a diameter of approximately 8 inches and an approximate length of 16 inches. The design cement percentages were 5% and 7%, both proper percentages used for CRF backfill in mining industry. The design curing times were 14 and 28 days, according to the standard curing time for concrete. Table 16-20 summarizes the CRF mix recipe prepared for UCS testing.

Table 16-20: CRF Mix Recipe for UCS Testing.

Mix ID	GM-1	GM-2
Aggregate size	<2 mm to 51 mm	<2 mm to 51 mm
Cement % by weight	5	7
Aggregate for 2.79 ft ³ CRF (lb) (material from Sample 2, under 2 inches)	313.80	313.80
Sand for 2.79 ft ³ CRF (lb) (fine material from Sample 2, under 10 mesh)	47.07	43.93
Cement for 2.79 ft ³ CRF (lb)	18.04	25.04
Water for 2.79 ft ³ CRF (gal) (water/cement = 1.2)	2.59	3.60
Estimate fresh CRF mix density (g/cm ³)	2.30	2.37

The mixing, casting and curing processes are shown in Figure 16-29.

Figure 16-29: Mixing, Casting and Curing Process




Note: Image prepared by MetaRock Laboratories, 2020 (Rock Mechanics Testing Report for - CRF Testing. Houston, Texas).

The following CRF capacities and strength results were obtained (Figure 16-30):

- 3.9 to 5.3 MPa of CRF strength with 7% of cement content and 14 days of curing;
- 5.2 to 6.1 MPa of CRF strength with 7% of cement content and 28 days of curing;
- 1.8 to 2.4 MPa of CRF strength with 5% of cement content and 14 days of curing;
- 3.0 to 3.2 MPa of CRF strength with 5% of cement content and 28 days of curing.

Figure 16-30: UCS Results vs Curing Time

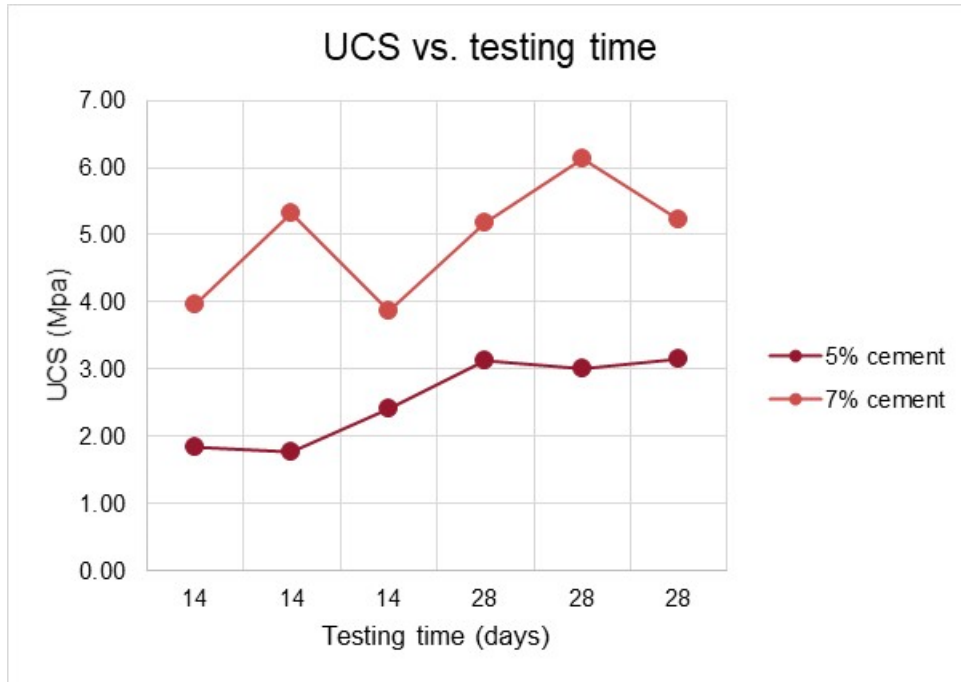

Note: Figure prepared by MetaRock Laboratories, 2020 (Rock Mechanics Testing Report for - CRF Testing. Houston, Texas).


Samples with low fines content and large particle concentration, which make rock contact possible, produce a weak zone of failure. A large particle size concentration can sometimes reduce the strength of CRF. A good relationship between sample density and strength was also found; therefore, a denser CRF with a low content of large particle sizes could have higher strengths.

Future work is required to assess the response of samples composed of 3% cement and 2% fly ash, and 4% cement and 3% fly ash, in order to compare these test results with the results of 5% and 7% cement, respectively.

16.9.7 Backfill Plant

An Eagle 4000 backfill plant, as shown in Figure 16-31, will be constructed near the portal.

Figure 16-31: Eagle 4000 Backfill Plant

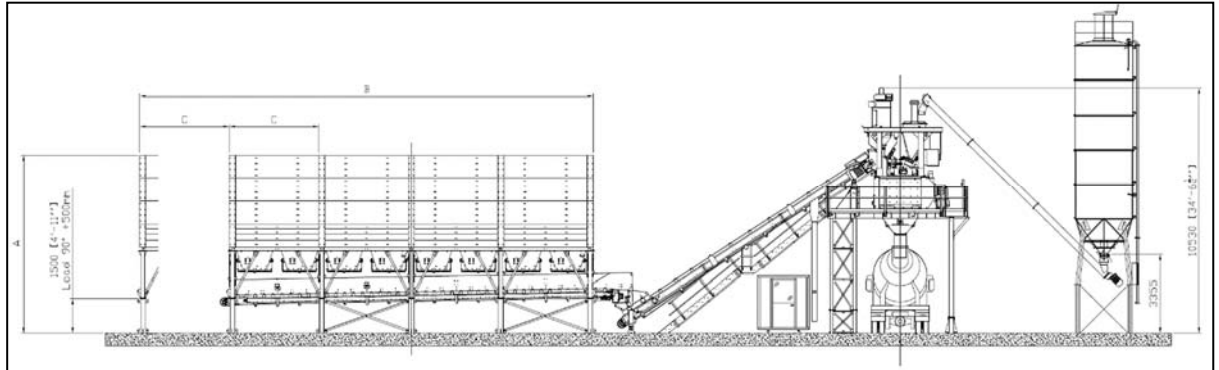

Note: Figure provided by MDA, after SIMEM, 2017 (SIMEM Quote #BA4X000001)

The waste rock from underground operations will be used for CRF. The plant will produce approximately 3,000 tons of CRF per day. The maximum amount of backfill required on a single day in the mine plan is 1,200 tons. The plant is oversized to ensure that the backfill plant will not be a bottle neck in the mining operation.

It is assumed that the truck haulage fleet will get loaded with material underground and haul the material to surface. After the haul truck dumps the material on surface the haul truck will be loaded on surface with backfill. Each truck will require four batches of backfill from the backfill plant to be fully loaded. The haul truck will haul the backfill underground and place it in a backfilling location. To summarize, the haul trucks will be loaded with underground material on the way out of the mine and be loaded with backfill on the way into the mine. This is referred to as “round-haul”. The backfilling assumptions are the same as the haulage assumptions in Table 16-19.

16.9.8 Production Scheduling

The scheduling approach assigns workers and equipment to four different crews: production mining, production backfilling, contractor development, and contractor raise bore. The production mining crew will contain four assets. An asset is a group of workers and equipment that can work one heading at a time. Each asset was assigned a rate of 30 ft/d. The production backfilling crew will contain two assets and each asset will have a rate of 600 backfill ton/d. The contractor development crew will have one asset and a rate of 18 ft/d. The contractor raise bore crew will contain one asset and the asset will have a rate of 3 vertical ft/d. Each crew will have a specific calendar applied to determine what days the crew will mine. The quantity of assets, calendars applied, and production rates are shown in Table 16-21, Table 16-22, and Table 16-23 respectively.

Table 16-21: Number of Assets Per Crew

Crew	Quantity of Assets
Production mining	4
Production backfilling	2
Contractor development	1
Contractor raise bore	1

Table 16-22: Calendars by Crew

Crew	Hours Per Day	Days Per Week
Production mining	24	Mon–Thurs (4)
Production backfilling	24	Mon–Thurs (4)
Contractor development	24	Mon–Sun (7)
Contractor raise bore	24	Mon–Sun (7)

Table 16-23: Production Rates

Name	Quantity	Unit
Lateral development rate	18	ft/d
Vertical development rate	3	ft/d
Production rate	30	ft/d
Backfill rate	600	t/d

Limits were placed on production fields. The limits were based on the first-principle productivity rates, and the mill capacity and the shotcrete plant capacity. The limits are shown in Table 16-24.

Table 16-24: Production Limits on Production Fields

Production Field	Limit	Unit
Economic material	1,600	t/d
Truck haulage	65,500	ton*mile/month
Transmixer haulage	5,500	ton*mile/month
Dual equipment hours	72	hr/d
Mucking equipment hours	96	hr/d
Blasting equipment hours	24	hr/d
Shotcrete sprayer equipment hours	24	hr/d
Shotcrete volume	1,100	cubic ft/d

16.10 Underground Infrastructure and Services


16.10.1 Ventilation

The ventilation network was designed to comply with US ventilation standards for underground mines (Code of Federal Regulations/Title 30. Underground metal and nonmetal mines. Washington, DC: U.S. Government Printing Office, Office of the Federal Register). Regulatory concentrations for gases are specified by the 1973 American Conference of Industrial Hygienists (ACGIH) threshold limit values (TLVs) [71 Fed. Reg. 3 28924 (2006)]. For diesel particular matter (DPM), a permissible exposure limit (PEL) of 160 µg/m³ total carbon is specified in the US diesel rule for metal/nonmetal mines (71 Fed. Reg. 28924 (2006)).

The Mine Safety and Health Administration (MSHA) sets an airflow requirement for the dilution of gas emissions, and an additional airflow requirement for dilution of DPM. These values are published with the list of approved engines on MSHA’s internet website. Airflow of 100,000 cubic feet per minute (cfm) was selected as a minimum reference for the ventilation design of each level in order to meet the


MSHA ventilation standards. A mine ventilation network design was built using the VentSim (Version 5.2) software package as shown in Figure 16-32 and Figure 16-33.

Figure 16-32: Ventilation Network (isometric view looking west)

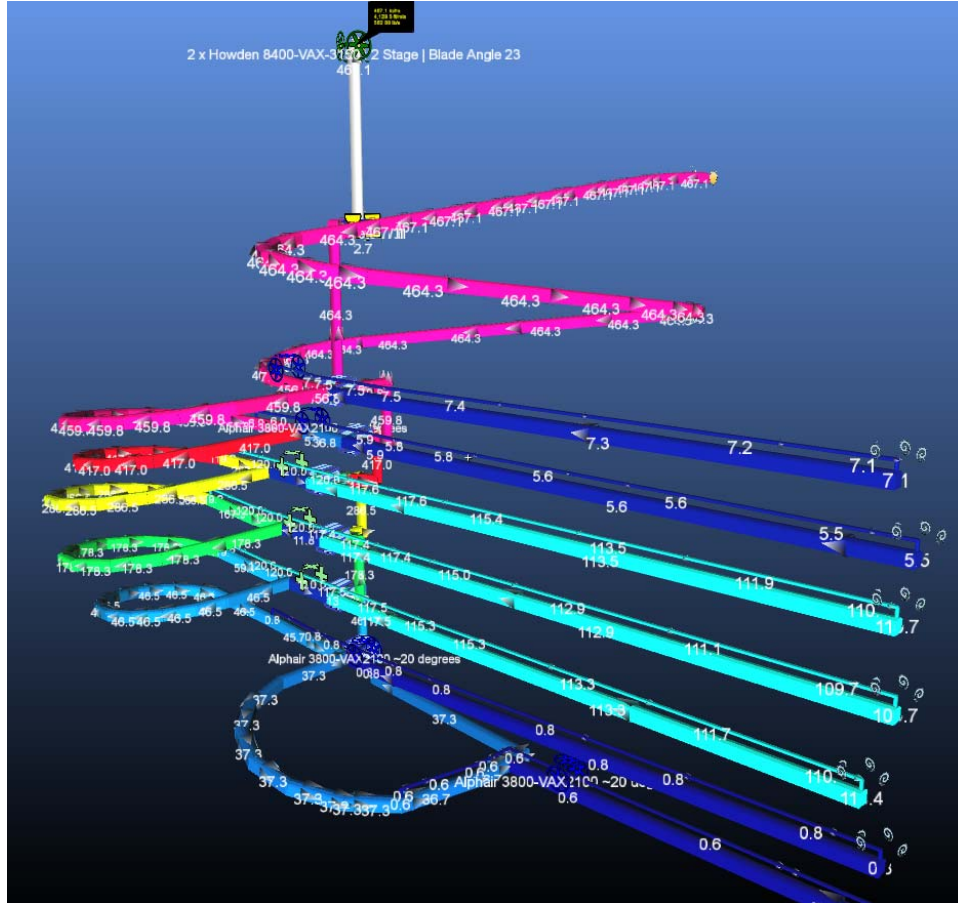

Note: Figure prepared by MDA, 2020.

Figure 16-33: Ventilation Network (Section View Looking Northwest)

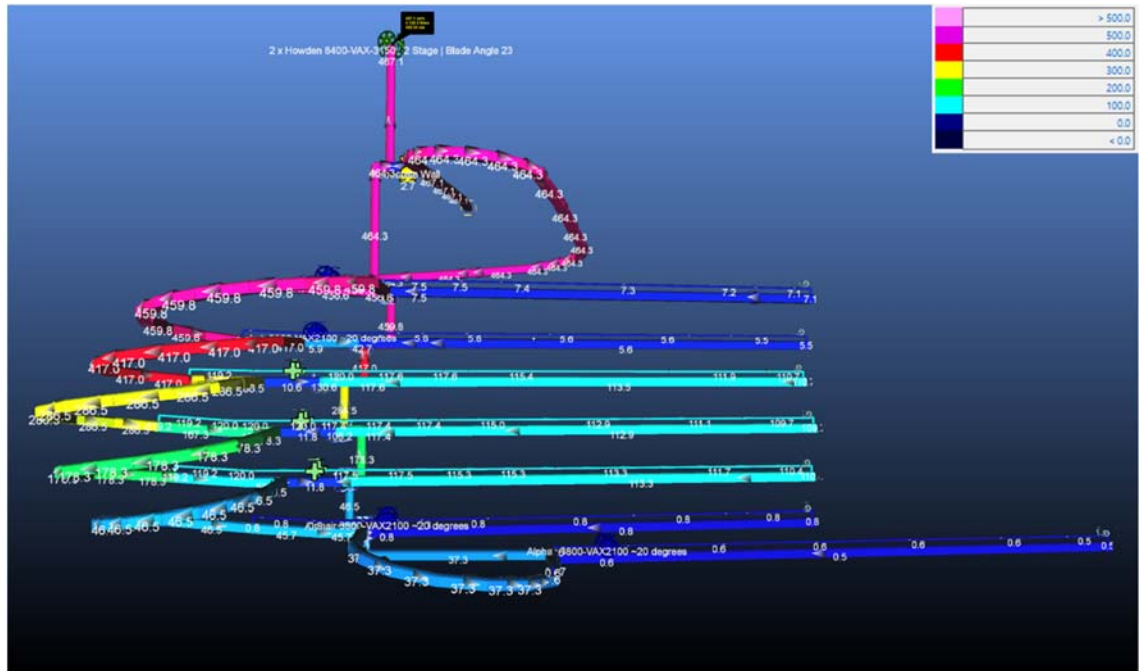


Note: Figure prepared by MDA, 2020.

Required airflows were determined at multiple stages during the mine life, using equipment numbers and utilization rates, specific engine types and exhaust output, and the number of personnel expected to be working underground. The designed ventilation system includes the following parameters:

- Main fan total pressure of 10.2 inches of water gauge;
- Main fan air flow of 467,000 cfm for both fans combined;
- Main fan power of 520 hp for each fan.
- Each active level air flow of 100,000 cfm;
- Only three active levels at any given time;
- Air density of 0.0722 lb/ft³.

The planned ventilation will use a push/pull system and will require two exhaust fans on surface. A raise bore will be used to construct ventilation raises between level stations and connecting to the surface fans as shown in Figure 16-34.

Figure 16-34: Design of Vent Raises

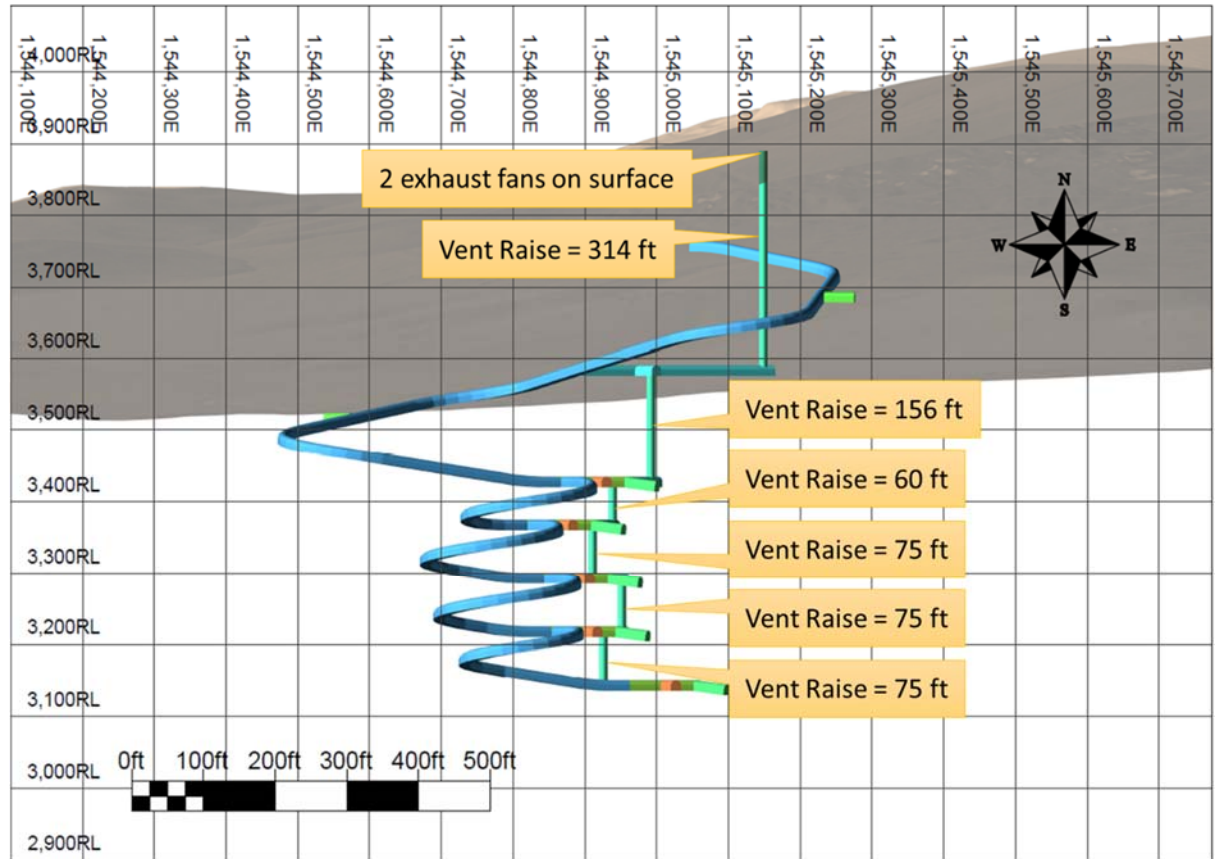

Note: Figure prepared by MDA, 2020.

Each vent raise will have a diameter of 12 ft. Each raise will be steel lined and have an escape ladder. Auxiliary fans will take air from the main circuit and push the air to the working face on the level using vent ducting and vent bag. Each level will have an auxiliary fan at the level station.

16.10.2 Underground Dewatering


Water will be needed for underground production drilling, bolting, shotcrete, and diamond drilling. The required LOM water supply has been estimated based on the mine-equipment requirements as summarized in Table 16-25.

Table 16-25: Estimated Underground LOM Water Requirement

Equipment	Quantity	Water Requirements (gal/min)	Operational Factors	Water Required (gal/min)
Resemin Troidon 88 Dual	3	20	70%	42
Diamond Drill	1	20	70%	14
Normet Spraymec 8100 VC	1	10	70%	7
Total Required				63
Factor				20%
Total with factor				76

Water at the face will be pumped to the station sump. From the station sump the water will either be used for equipment water supply or pumped out to the plant for use in the process circuit. When used for equipment water supply, the sediments will be removed at the station sump. Excess water at the station sump will be pumped up to the next station sump. The water will continue to be pumped up to the next station until it is pumped out of the mine as shown in Figure 16-35.

Figure 16-35: Sump Design and Layout

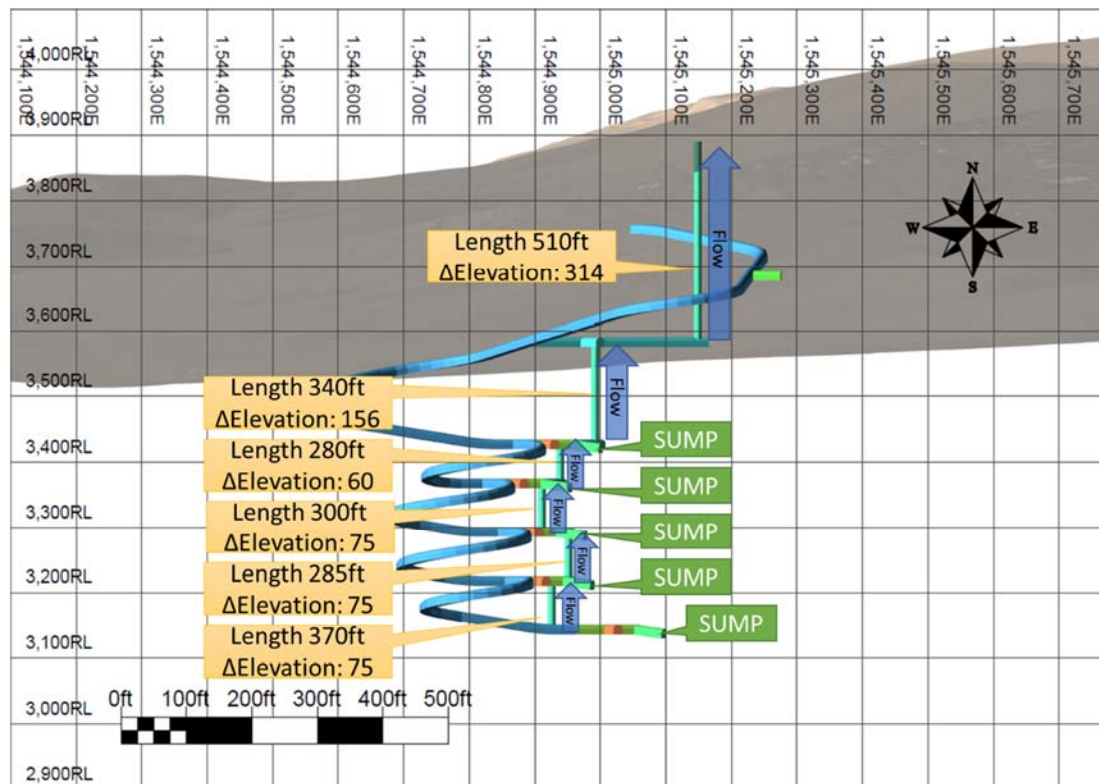

Note: Figure prepared by MDA, 2020.

The distance from each sump and the change in elevation is also given in Figure 16-35. The connection between sumps will be a steel pipe in the ventilation raise. The report titled “Grassy

Mountain Gold and Silver Project Mine Dewatering Hydrogeologic Assessment” by Lorax Environmental Services (March, 2020) states the following: “*The total estimated range of inflow rates is 12 US gpm to 78 US gpm.*” The dewatering system was designed for 200 gpm which will accommodate both the max inflow rates (78 gpm) and the equipment water requirements rates (76 gpm) in the event that water is not recirculated to the equipment.

16.10.3 Underground Power

An underground 480 V transformer will be placed near the entrance to the portal at the start of mining. This will supply power to electrical equipment used to develop the main decline and to portable fans. A main power line will be installed along the rib of the decline to carry 1.4 kV when development has advanced far enough that carrying power at 480 V becomes too inefficient. This line will be connected to a transformer that will be moved underground. Line power will also be extended to the locations of the two ventilation shafts to supply power to the ventilation fans.

Upon completion of the decline to the 3420 level, a second transformer will be purchased. Both transformers will be placed underground in power bays. The transformers will be moved to other power bays depending on the location of the mining activities.

16.10.4 Underground Communications

Inside the mine, a leaky-feeder very high frequency (VHF) radio system will be used as the primary means of communication. The system will allow for communications between the underground mine and surface operations.

16.10.5 Underground Refuge and Escape Ways

Two emergency refuge stations will be necessary in case of fire or rockfalls that would block access and prevent full evacuation of personnel. These refuges will allow the staff to remain safe in the underground mine for 48 hours. The refuges are mobile, each can accommodate up to 20 people within the protected chamber, and they will be located so that they are always no more than 1,000 ft from the areas where the mine operation personnel are located. Figure 16-36 shows an example of a refuge station.

Figure 16-36: Mobile Refuge Station



Note: Figure provided by MDA, 2010, after MineARC, 2020 (MineARC Quote #MS-SD2-12-SIV-36).

All vent raises will be steel lined and equipped with an escape way ladder for secondary evacuation. The primary route for evacuation will be the decline. The secondary route for evacuation will be the vent raises.

16.11 Mining Costs

Mining costs are summarized in Section 21.

16.12 Life-of-Mine Production

The QP used the Proven and Probable Mineral Reserves to create a mine production schedule using Deswik Scheduler (version 2019.4), which allows for the scheduling of both underground development and production. The primary inputs used to develop the schedule include:

- The resource block model with defined material types;
- Development centerlines drawn in the direction of mining;
- Solids representing the stopes or production areas to be mined;
- Attributes to define activity types, material types, profiles, etc.;
- Mining sequence among developments and production areas;
- Development and production rates by location;
- Definition of the periods to be used.

The naming convention for material types considered either ore or waste. Ore was assigned to two categories based on grade: high-grade or low-grade. High-grade is material that is above the economic cut-off grade. Low-grade is material that is below the mining economic cut-off grade, but above the resource cut-off grade. The basic assumption is that a stope that is economic to be mined will be processed in its entirety. Thus, if internal waste in an economic stope is classified as Measured or Indicated Mineral Resources, these resources will be converted to Proven or Probable Mineral Reserves, respectively, and will contribute to the revenue stream.

Waste comprises:

- Material classified as Measured or Indicated Mineral Resources that is below both the mining cut-off grade and the resource cut-off grade;
- Material classified as Inferred Mineral Resources.

Waste is considered to be internal dilution within a stope, which would be mined and sent to the process plant. All waste material is considered to have zero grade and therefore does not contribute to the revenue stream.

The final production schedule was calculated in Deswik Scheduler and then summarized in Excel. The mine production summary is presented in Table 16-26. The material to be sent to the mill is summarized in Table 16-27. The development schedule is summarized in Table 16-28.

Table 16-26: Mine Production Summary

Year	Year -1	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7	Year 8	Total
Mined M&I Resource Above Cut-off Grade										
Tons (tons x 1,000)	—	158	203	198	201	205	235	205	126	1,532
Grade (oz Au/ton)	—	0.26	0.22	0.23	0.26	0.22	0.22	0.22	0.24	0.23
Ounces (oz Au x 1,000)	—	42	44	46	53	45	51	45	30	356
Grade (oz Ag/ton)	—	0.35	0.28	0.29	0.33	0.32	0.30	0.32	0.34	0.31
Ounces (oz Ag x 1,000)	—	56	57	57	66	66	71	65	43	481
Mined M&I Resource Subgrade										
Tons (tons x 1,000)	—	52	61	51	59	55	45	37	19	380
Grade (oz Au/ton)	—	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.06
Ounces (oz Au x 1,000)	—	3	4	3	4	4	3	3	1	24
Grade (oz Ag/ton)	—	0.21	0.18	0.17	0.18	0.19	0.20	0.21	0.20	0.19
Ounces (oz Ag x 1,000)	—	11	11	9	11	11	9	8	4	72
Total Mined to Stockpile										
Tons (tons x 1,000)	—	210	265	249	260	260	281	242	144	1,911
Grade (oz Au/ton)	—	0.21	0.18	0.20	0.22	0.19	0.19	0.19	0.22	0.20
Ounces (oz Au x 1,000)	—	45	48	49	57	48	54	47	31	380
Grade (oz Ag/ton)	—	0.32	0.26	0.26	0.30	0.29	0.29	0.30	0.32	0.29
Ounces (oz Ag x 1,000)	—	67	68	66	77	76	80	73	47	554
Total with Ore Loss & Dilution										

Year	Year -1	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7	Year 8	Total
Tons (tons x 1,000)	—	230	288	267	281	278	304	266	156	2,070
Grade (oz Au/ton)	—	0.20	0.17	0.19	0.21	0.18	0.18	0.18	0.21	0.19
Ounces (oz Au x 1,000)	—	46	50	51	58	50	56	48	32	390
Grade (oz Ag/ton)	—	0.30	0.25	0.26	0.29	0.29	0.28	0.29	0.31	0.28
Ounces (oz Ag x 1,000)	—	70	71	68	80	80	84	76	49	578
Waste										
Waste tons (tons x 1,000)	62	65	31	17	28	28	6	17	17	272
Backfill										
Cemented rockfill tons (tons x 1,000)	—	136	174	210	199	204	200	194	144	1,463
Footage										
Lateral footage (ft)	3,800	17,400	18,100	15,300	15,900	15,400	15,600	14,200	9,000	124,700
Vertical footage (ft)	500	200	100							800
Total footage (ft)	4,300	17,600	18,200	15,300	15,900	15,400	15,600	14,200	9,000	125,500

Note: subgrade refers to Measured and Indicated (M&I) Mineral Resources with grades greater than the resource cut-off grade, but lower than the stope economic cut-off grade.

Table 16-27: Material to the Mill

Year	Year -1	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7	Year 8	Total
Low-Grade Material										
Tons (tons x 1,000)	—	56	66	55	64	59	50	40	21	411
Grade (oz Au/ton)	—	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.06
Ounces (oz Au x 1,000)	—	3	4	3	4	4	3	3	1	26


Year	Year -1	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7	Year 8	Total
Grade (oz Ag/ton)	—	0.20	0.17	0.17	0.18	0.19	0.20	0.20	0.19	0.19
Ounces (oz Ag x 1,000)	—	11	11	9	11	11	10	8	4	76
High-Grade Material										
Tons (tons x 1,000)	—	174	222	212	217	219	255	226	135	1,659
Grade (oz Au/ton)	—	0.24	0.20	0.22	0.25	0.21	0.21	0.20	0.23	0.22
Ounces (oz Au x 1,000)	—	43	45	47	54	46	53	46	31	364
Grade (oz Ag/ton)	—	0.33	0.27	0.28	0.32	0.31	0.29	0.30	0.33	0.30
Ounces (oz Ag x 1,000)	—	58	60	59	69	69	74	68	45	502
Total to Plant										
Tons (tons x 1,000)	—	230	288	267	281	278	304	266	156	2,070
Grade (oz Au/ton)	—	0.20	0.17	0.19	0.21	0.18	0.18	0.18	0.21	0.19
Ounces (oz Au x 1,000)	—	46	50	51	58	50	56	48	32	390
Grade (oz Ag/ton)	—	0.30	0.25	0.26	0.29	0.29	0.28	0.29	0.31	0.28
Ounces (oz Ag x 1,000)	—	70	71	68	80	80	84	76	49	578

Table 16-28: Development Schedule

Year	Year -1	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7	Year 8	TOTAL
Development Type										
Main Decline (ft)	3,000	1,890	250							5,140
Level Station (ft)	260	760	260							1,280
Level Development Waste (ft)	60	1,170	1,270	1,000	1,670	1,630	350	1,040	1,000	9,190
Level Development Ore (ft)		13,280	16,190	14,290	14,230	13,820	15,270	13,130	7,990	108,200
Vent Drift (ft)	490	330	100							920
Vent Raise (ft)	470	210	70							750
Total Development (ft)	4,280	17,640	18,140	15,290	15,900	15,450	15,620	14,170	8,990	125,480


Figure 16-37 and Figure 16-38 show the proposed yearly production schedule in terms of tons and gold and silver ounces for the LOM.

Figure 16-37: Mine Production Schedule (tons by period)

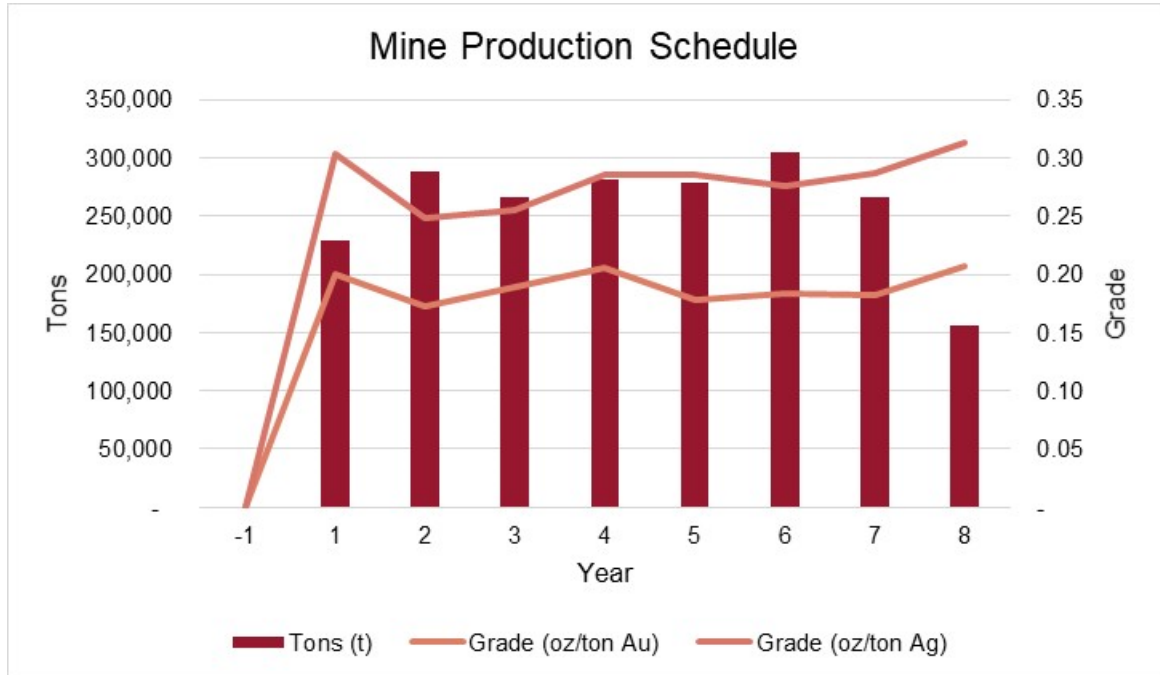

Note: Figure prepared by MDA, 2020.

Figure 16-38: Mine Production Schedule (ounces by period)

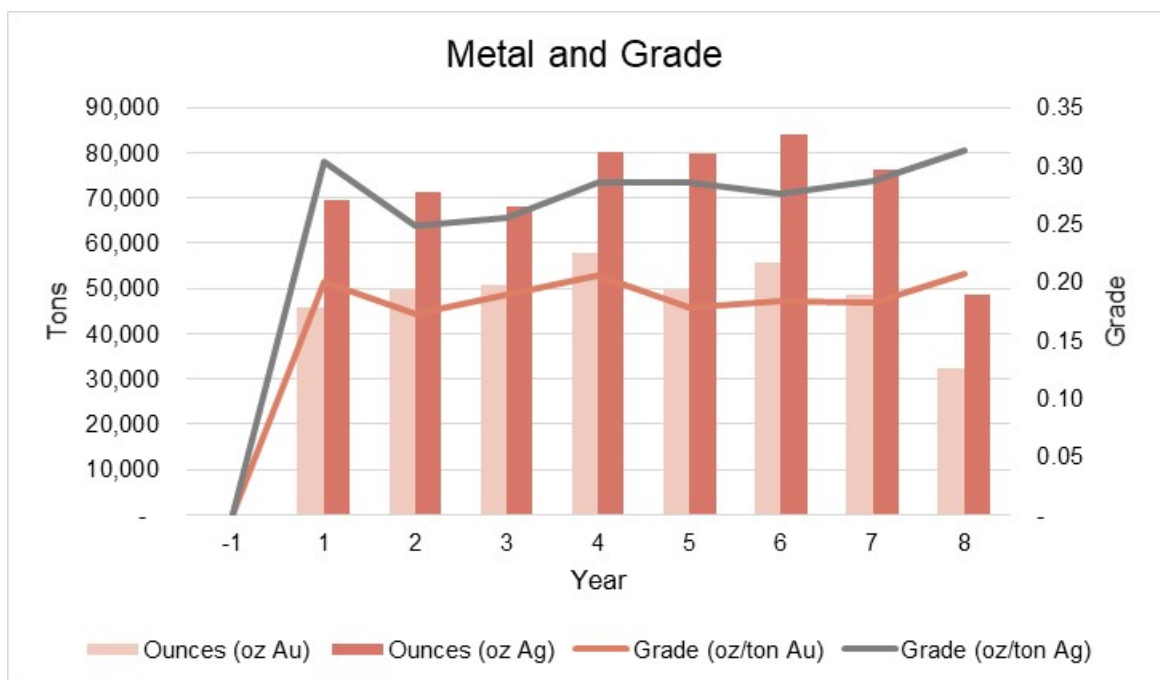

Note: Figure prepared by MDA, 2020.

17 RECOVERY METHODS

17.1 Introduction

Based on the information and metallurgical test results summarized in Section 13, the Grassy Mountain gold–silver mineralization is considered amenable to cyanide leaching as a recovery method. The process plant will consist of a 750 tons/d, two-stage crushing, ball mill, CIL, elution and electrowinning circuit, all of which are well-known, conventional, processing unit operations.

17.2 Process Design Criteria

The process plant is designed for treatment of 750 tons/d or 34 tons/hour based on an availability of 7,998 hours per annum or 91.3%. The crushing section design is set at 70% availability and the gold room availability is set at 52 weeks per year including two operating days and one smelting day per week. The plant is designed to operate with two shifts per day, 365 days per year, and will produce doré bars.

Key design parameters derived from metallurgical testwork, as well as the resulting sizing parameters of major equipment, are shown in Table 17-1.

Table 17-1: Key Process Design Criteria

Description	Units	Value
Ore throughput	tons/year	248,365
Mine life	years	7.8
LOM average grade, Au	oz/ton	0.206
LOM average grade, Ag	oz/ton	0.293
Design grade, Au	oz/ton	0.266
Design grade, Ag (corresponding to design grade for Au)	oz/ton	0.280
Operating Schedule and Stockpile		
Crusher availability	%	70
Plant availability (milling and leach)	%	91.3
Crusher operating time	hours/year	6,132
Plant operating time	hours/year	7,998
Gold room operating days	days/year	104
Gold room smelting days	days/year	52
Stockpile type	—	Conical
Stockpile repose angle	°	37
Stockpile retention time	hours	24
Ore Properties		
Specific gravity (average)	—	2.6
JK Axb (25 th percentile)	—	30.4
Bond rod work index (BRWi) (75 th percentile)	kWh/ton	22.3

Description	Units	Value
Bond ball work index (BBWi) (75 th percentile)	kWh/ton	26.9
Bond abrasion index (Ai) (average)	g	0.641
Primary Crushing		
Throughput, nominal	tons/hour	45
Primary crusher type		Jaw
Primary crusher model		Metso C80 or equivalent
Closed size setting	Inches	2.0
Feed size, F ₈₀	Inches	8.3
Crushing product, P ₈₀	inches	1.9
Secondary Crushing		
Circulating load, nominal	%	263
Secondary crusher type		Cone
Secondary crusher model		Metso HP200 or equivalent
Closed size setting	Inches	0.6
Feed size, F ₈₀	Inches	1.6
Milling and Classification		
Throughput, nominal	tons/hour	34.2
Ball mill dimensions (diameter x effective grinding length)	Ø x EGL (ft)	12 x 16
	Ø x EGL (m)	3.66 x 4.88
Ball mill required power	horsepower	1,021
Ball mill installed power	horsepower	1,341
Ball mill product P ₈₀	µm	106
Circulating load, max for design	%	350
Cyclone overflow solids	%	45
Carbon-In-Leach		
Total leach time required	hours	24
Total leach time available	hours	27
Number of tanks	number	1 pre-aeration + 2 leaching + 7 adsorption
Cyanide addition	pound/ton	0.68
Lime addition	pound/ton	2.1
Carbon concentration	pound/gallon	0.21
Carbon loading (Au + Ag)	oz/ton	187
Carbon consumption	pound/ton	0.06
Desorption/Electrowinning/Refining		
Elution method	—	Pressure Zadra
Carbon batch size	ton	2.2
Elution strips per week	number	7
Furnace capacity, Au + Ag	pound/smelt	57.5
Cyanide Destruction		
Cyanide reduction system	—	SO ₂ /air
Residence time, max for design	minutes	90

Description	Units	Value
CN _{WAD} in feed, maximum for design	ppm	200
CN _{WAD} discharge, not to exceed	ppm	30
CN _{WAD} discharge target for design	ppm	15
SO ₂ addition	lb/lb CN _{WAD}	6.4
Hydrated lime addition	lb/lb CN _{WAD}	10.8
Cu addition	lb/lb CN _{WAD}	0.11


17.3 Process Flowsheet Development

The process flowsheet was developed based on data developed in the 2018 PFS, together with updated information from metallurgical testwork as outlined in Section 13. The crushing and grinding circuit sizing were determined using in-house Bruno and Ausgrind simulations, respectively. During the 2020 FS, the flowsheet developed during the 2018 PFS was modified to a simpler, lower capital cost alternative comprising:

- Two-stage crushing circuit;
- Grinding circuit;
- Hybrid leach-CIL circuit with pre-aeration;
- Mercury removal circuit;
- Cyanide destruction.


The simplified overall flowsheet is shown in Figure 17-1. The plant site layout is shown in Figure 17-2.

Figure 17-1: Simplified Overall Flowsheet

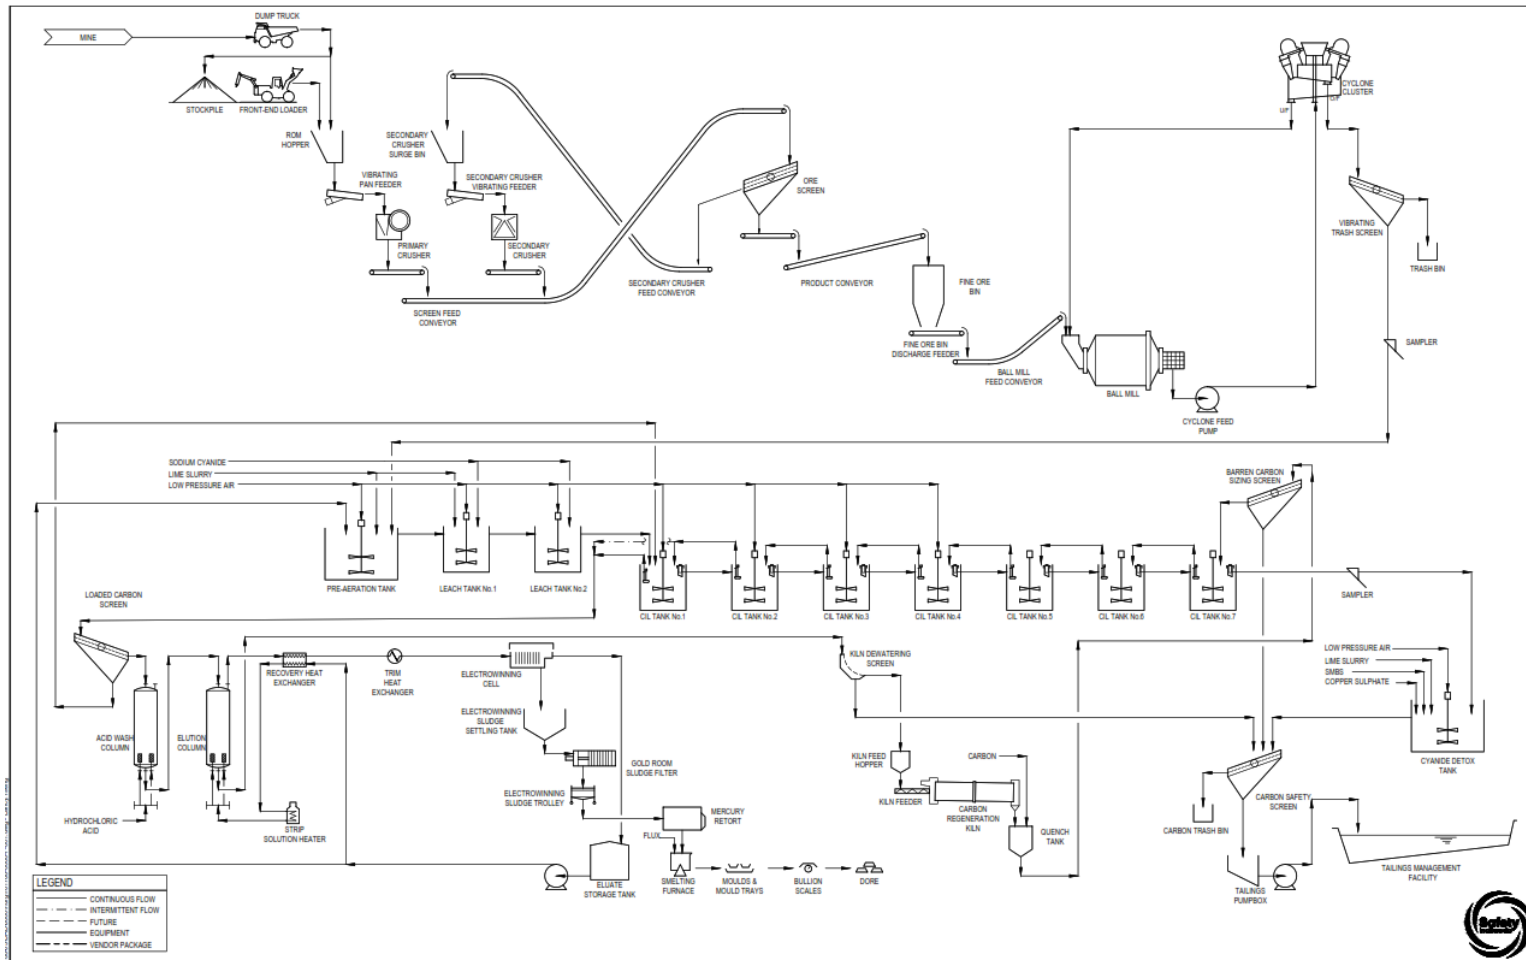

Note: Figure prepared by Ausenco, 2020.

Figure 17-2: Proposed Plant Site Layout

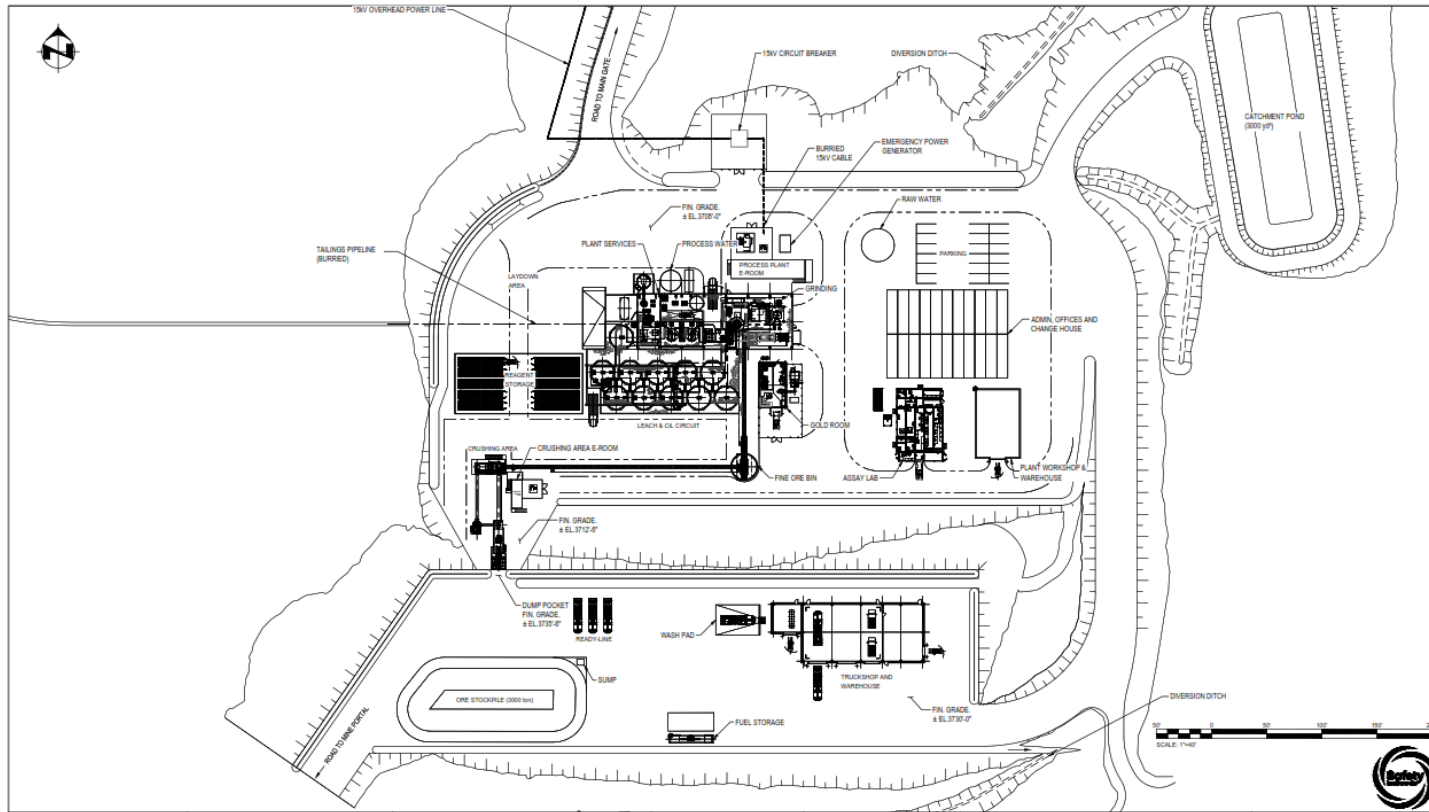

Note: Figure prepared by Ausenco, 2020.

17.4 Overall Process Description

The plant feed will be hauled from the underground mine to a mobile crushing facility that will include a jaw crusher as the primary stage and a cone crusher for secondary size reduction. The crushed ore will be ground by a ball mill in closed circuit with a hydro-cyclone cluster. The hydro-cyclone overflow with P₈₀ of 150 mesh (106 µm) will flow to a leach–CIL recovery circuit via a pre-aeration tank.

Gold and silver leached in the CIL circuit will be recovered onto activated carbon and eluted in a pressure Zadra-style elution circuit and then precipitated by electrowinning in the gold room. The gold–silver precipitate will be dried in a mercury retort oven and then mixed with fluxes and smelted in a furnace to pour doré bars. Carbon will be re-activated in a carbon regeneration kiln before being returned to the CIL circuit. Mercury is collected and shipped off site for third party storage.

CIL tails will be treated for cyanide destruction prior to pumping to the tailings storage facility (TSF) for disposal.

17.4.1 Crushing Circuit

The crushing facility will be a two-stage crushing circuit that will process the run-of-mine (ROM) ore at an average rate of 45 tons/hour. The major equipment and facilities at the ROM receiving and crushing areas will include:

- Ore stockpile;
- ROM hopper;
- Vibrating pan feeder;
- Primary jaw crusher;
- Coarse ore screen;
- Secondary crusher surge bin;
- Secondary crusher vibrating feeder;
- Secondary cone crusher;
- Fine ore bin;
- Feed and product conveyors.

Ore will be trucked from underground and dumped directly into the ROM hopper or onto the outdoor stockpile during crushing circuit downtime. A front-end loader will reclaim ore from the stockpile and move it to the ROM hopper as necessary.

The ROM hopper will continuously feed a vibrating pan feeder which will discharge into the primary jaw crusher. After primary crushing, the ore conveyor will bring the ore to a coarse ore screen. A belt magnet at the end of the ore conveyor will be present to prevent pieces of metal from continuing onto the coarse ore screen.

Oversize from this screen will be transferred by the secondary crusher feed conveyor to the secondary crusher surge bin. This conveyor will be fitted with a metal detector for the secondary crushing circuit to be temporarily shut down for tramp metal removal. Ore from the secondary crusher surge bin will pass over the second crusher vibrating feeder and into the secondary crusher. After secondary crushing, the ore will recirculate to the coarse ore screen in combination with ore from the primary jaw crusher via the ore conveyor.

Undersize from the coarse ore screen will be taken by the product conveyor to the fine ore bin. The product conveyor will have a weightometer to monitor the crushing circuit throughput.

The fine ore bin discharge feeder will feed ore from the fine ore bin onto the ball mill feed conveyor and over to the grinding circuit and will be fitted with a weightometer to provide data for feed-rate control to the grinding circuit.

17.4.2 Grinding Circuit

The grinding circuit will have an average feed rate of 34.2 tons/hour and will consist of a ball mill and a cyclone cluster in a closed circuit. The recirculating load will have a maximum of 350%. The grinding circuit will be designed for a product size P_{80} of 150 mesh. The major equipment in the primary grinding circuit will include:

- One 12-ft diameter (inside shell) by 16-ft effective grinding length (EGL) single-pinion ball mill driven by a single 1,341 hp fixed-speed drive motor;
- One cyclone cluster.

As required, steel balls will be added into the ball mill using a ball bucket and ball charging chute to maintain grinding efficiency.

Crushed ore will travel along the ball mill feed conveyor and discharge directly into the ball mill via the mill feed chute. Process water will be added to reach a pulp density of 72% solids (by weight) through the ball mill, which will then discharge to the cyclone feed pump box. Trash or broken mill balls will be discharged to a scats bunker and removed by a front-end loader. Additional process water will be added to the cyclone feed pump box to achieve a density of 63.5% solids, which will then be pumped to the cyclone cluster. The cyclone underflow will recirculate to the mill feed chute. The cyclone overflow will discharge at 45% solids and report to a trash screen. Trash screen oversize will be sent to a trash bin. The slurry will then flow by gravity to the pre-aeration tank.

Maintenance activities in the grinding and classification area will be serviced by a mill area crane, and a grinding area hoist, which will be used for ball-mill charging duties and minor lifts. Spillages in the grinding and classification area will be pumped by the grinding area sump pump into the cyclone-feed pump box.

17.4.3 CIL Leaching

A pre-aeration tank was included ahead of the leach circuit, as testwork showed this reduced consumption of cyanide and improved recovery. Testwork determined that the optimal leach residence time for gold 24 hours.

The adsorption circuit configuration selected was a hybrid leach–CIL circuit (two leach, seven CIL tanks). This circuit configuration is beneficial as it achieves higher loadings of gold on carbon (gold is fast-leaching and approximately 85% of gold is expected to be dissolved before adsorption, resulting in higher loaded carbon grades in the first adsorption tank). This translates into lower soluble losses and a smaller elution circuit size. Selection of identical tank sizes for leach and CIL simplifies tank access and reduces maintenance spares holding. Each tank has a capacity of 42,250 gallons.

The pre-aeration tank will mix the cyclone overflow with low-pressure air. Slurry will overflow the pre-aeration tank to the first leach tank, where lime will be added at a rate of 2.1 lb/ton of feed. Cyanide will be added into both leach tanks at a rate of 0.68 lb/ton of feed, together with low-pressure air.

The slurry will then overflow into seven CIL tanks. The first four CIL tanks will also be fed low-pressure air. Barren carbon will be added to the last CIL tank and will travel up through the circuit in the opposite

direction from the slurry flow (counter-current flow). Carbon will advance once per day with carbon transfer pumps, which pump carbon-laden slurry to the next tank in the train. Carbon will be retained in the tanks after the transfer with inter-stage screens, which will have mesh baskets sized to allow slurry to pass through but not the loaded carbon.

Leached tails will overflow the last tank to the detox tank which in turn will overflow to the carbon safety screen. This screen will collect carbon that would otherwise be lost to the tailings in the event of a hole in one of the inter-stage screens. Loaded carbon will be pumped from the first CIL tank to the elution circuit via a loaded-carbon screen, which will separate the carbon from slurry and send the slurry back to the leach circuit.

17.4.4 Carbon Management

17.4.4.1 Acid Wash

Loaded carbon from the leach circuit will be loaded into an acid-wash column, where it will be submerged in a 3% hydrochloric acid solution in order to dissolve lime scale that would otherwise interfere with the elution and adsorption process. After soaking for 30 mins, the acid will be drained, and two bed volumes of raw water will be circulated through the column to rinse and neutralize the acid from the carbon. After rinsing, the carbon will be pumped to the elution column via carbon-transfer water.

17.4.4.2 Carbon Elution

A pressure Zadra circuit was selected for elution of gold and silver from carbon due to the small carbon processing requirements of the CIL circuit and unknown water quality from the raw water wells. A pressure Zadra circuit is less complicated than comparable alternatives, and is less sensitive to poor water quality, which makes it a better choice in this instance.

Strip solution (eluate) will be made up in the strip-solution tank using raw water dosed with 2% sodium hydroxide and 0.2% cyanide to form an electrolyte for the electrowinning process. This solution will be circulated through the elution column via an eluate heater, which heats the solution, the carbon, and the column to 275°F. The elution system will be pressurized to keep the solution from flashing to steam in the heater or elution column.

A recovery heat exchanger will transfer heat from the hot pregnant solution exiting the column to the incoming solution before passing through the solution heater. This will reduce the energy required to maintain the solution temperature and cool the pregnant solution before it enters the electrowinning cell. Once the required system temperature is reached, the hot pregnant eluate solution will be directed to the electrowinning cell, where the metals will be plated onto cathodes. Solution continues to circulate through the elution column and electrowinning cell. The process will continue to deposit metals into the electrowinning cell for a maximum of 16 hours.

17.4.4.3 Carbon Regeneration

At the end of the elution cycle, the barren carbon will be transferred to the regeneration kiln feed hopper where it will be fed into the regeneration kiln. The kiln will regenerate the carbon by burning off any organic material fouling the carbon that would hinder its ability to absorb metals in the CIL circuit. The kiln's operating temperature will be 1,382°F.

Regenerated carbon will exit the kiln and report to the water-filled quench tank. The quench tank will serve as a holding place for the carbon while it is waiting to be returned to the circuit. Regenerated carbon will be pumped from the quench tank through a barren carbon screen to remove fines as well as dewater the carbon. Oversize from the screen will then re-enter the CIL circuit via the CIL tank at the end of the bank.

17.4.4.4 Carbon Transport Water

All carbon movements in the elution and regeneration circuits will be accomplished using carbon-transport water. A transport-water tank and pump will supply transport water to carbon movement demands as needed. The acid wash and elution columns will be fitted with internal strainers to allow the transport water to drain out while the column retains the carbon.

Transport water will pick up fines when moving carbon due to the attrition associated with carbon movement. The transport water tank will be periodically drained to tailings.

17.4.5 Gold Room

The gold room will house the electrowinning cell, smelting furnace, and associated support equipment within a secured area.

One day a per week, the electrowinning cell will be opened so that sludge can be cleaned out manually with a high-pressure water hose. Sludge from the clean-up will flow by gravity to the sludge settling tank and into the gold room sludge filter press to be dewatered. Dewatered sludge will then be transported manually using a tray to the mercury retort oven for mercury removal as well as simultaneous drying. Mercury collected will be sent off site for third-party processing.

Dried sludge will be removed from the oven the following day and combined with fluxes in a flux mixer before reporting to the smelt furnace. Once all the mixture has been added to the furnace and enough time has elapsed for the material to fully melt, the slag will be poured into a conical slag pot. The liquid metal will then be poured into molds on a mound tray. Cooled doré will then be cleaned, weighed, and stamped. The bars will be placed in a vault to await shipment to a refinery.

Dust collection will be provided in the gold room for smelting. Extraction fans are planned for the kiln, electrowinning cell, retort/drying oven, and smelting-furnace off gasses. All extraction fans will lead to a gas scrubbing system.

17.4.6 Cyanide Detoxification and Tailings Deposition

A cyanide-destruction circuit will be included in the design to comply with tailings-discharge permit requirements. Testwork shows that SO₂/air process was an effective detoxification method at reducing weak-acid dissociable (WAD) cyanide levels to 15 mg/L (30 mg/L maximum).

The CIL tailings will be pumped to the cyanide detoxification tank, where lime will be added to buffer pH, copper sulfate will be added as a reaction catalyst, and sodium meta-bisulfite (SMBS) will be added as an SO₂ source. The tank is sized to provide 90 mins of residence time for the reaction to reach completion.

Detoxified slurry will overflow to the tailings pump box where it will be pumped to the TSF by the final tailings pumps. At the TSF, the tailings will be deposited using spigot manifolds positioned along the rim of the impoundment to create low-angle deposition beaches. The position of the spigot manifolds will be moved periodically to produce an even beach head and push decant water towards the decant-water pool. A pontoon-mounted decant-return water pump will be provided to pump decant water back to the process-water tank for re-use in the plant.

17.4.7 Reagent Handling and Storage

Reagents will be prepared and stored in separate self-contained areas within the process plant and delivered by individual metering pumps or centrifugal pumps to the required addition points. Acidic and basic reagents will be stored and mixed in physically-separated areas to ensure no exposure of cyanide to acidic chemicals, which would generate hydrogen-cyanide gas.

Estimated reagent consumptions are as follows:

- Lime: 6.3 lb/ton of ore processed;
- Sodium cyanide: 0.91 lb/ton of ore processed;
- Sodium meta-bisulfite: 3.6 lb/ton of cyanide processed.

17.4.7.1 Hydrated Lime

Preparation of hydrated lime slurry will require:

- A bulk-storage silo;
- A mixing tank;
- Dosing pumps feeding a ring main;
- Automatically controlled dosing point from the ring main.

Hydrated lime will be used in leaching and detoxification for pH control. Hydrated lime powder will be delivered to site by bulk tankers and blown into the lime bulk-storage silo. When the mixing-tank is low, hydrated lime will be added to the tank via a rotary valve and screw feeder. Process water will be added at the same time to maintain the mixture strength of 20%, forming a suspended lime slurry.

The suspended lime slurry will be distributed to the various dosage points via a ring main that provides constant flow to various destinations. Dosing will be accomplished with drop lines off the ring main with automated on-off valves that open when pH is low and close when the target pH is reached.

17.4.7.2 Sodium Cyanide

Storage and distribution of sodium cyanide (NaCN) will require:

- A bulk storage tank;
- A ring main;
- Dosing pumps.

NaCN will be used in the leach circuit as a lixiviant and in elution as a carbon-stripping aid. Aqueous sodium cyanide will be delivered to site by bulk tanker at 30% purity and emptied into the sodium cyanide storage tank. NaCN solution will be distributed to the various dosage points via a ring main that provides constant flow to various destinations.

17.4.7.3 Sodium Hydroxide

Preparation of sodium hydroxide (NaOH) will require dosing pumps. NaOH will be delivered to site in 264.2-gal totes at a solution strength of around 50%. New totes will be lifted onto a mount using a forklift. Dosing will be done at full strength using dedicated positive-displacement metering pumps. NaOH will be used as an electrolyte in carbon elution/electrowinning.

17.4.7.4 Sodium Metabisulfite

Preparation of SMBS will require:

- A bulk handling system;
- Mixing and holding tanks;

- Dosing pumps.

SMBS will be a source of SO₂ for cyanide destruction with the SO₂/air process. It will be delivered to site in 1.1-ton bulk bags.

SMBS will be held in the SMBS storage tank after it is mixed. When the storage-tank is low, a SMBS mixture will be started by dropping a bulk bag of SMBS onto a bag breaker, which discharges SMBS into the mix tank. The mix tank will have been previously filled with the required amount of process water to produce a mixture strength of 20%. Once mixing is complete, the SMBS will be dosed from the storage tank to the cyanide detoxification circuit. There will be two positive displacement metering pumps dedicated to this process, one of which will be in place as a spare.

17.4.7.5 Copper Sulfate

Distribution of copper sulfate (CuSO₄) will require dosing pumps. CuSO₄ will be delivered to site in 53-gal drums at a solution strength of 15%. New drums will be listed onto a mount using a forklift. Dosing to the detoxification circuit will be done using dedicated positive-displacement metering pumps.

17.4.7.6 Hydrochloric Acid

Distribution of hydrochloric acid (HCl) will require a dosing pump. HCl will be used to remove lime scale from loaded carbon in the acid-wash column of the elution circuit. HCl will be delivered in 264.2-gallon totes at 32% solution strength and will be housed in the reagent handling area.

Raw water will be added to the HCl to a strength of 3% by inline mixing ahead of the acid-wash column.

17.4.8 Air Supply and Distribution

17.4.8.1 Low-Pressure Air

Two low-pressure air blowers will supply air to the pre-aeration, leach, and detoxification circuits. The installed blowers will be multiple-stage, centrifugal-type blowers and will be used with a “blow-off” arrangement to adapt to fluctuations in air demand.

17.4.8.2 Plant and Instrument Air

Two plant-air compressors (duty/standby) will provide high-pressure compressed air, to meet the demand for plant and instrument-air requirements. Wet plant air will be stored in the plant-air receivers to account for variation in demand prior to being distributed through the plant. Wet air will report to cyanide offloading. Instrument air will be filtered then dried in the instrument-air dryer before reporting to the gold room or general plant distribution.

17.4.9 Water Supply and Distribution

17.4.9.1 Raw Water

Raw water will be pumped from borehole wells via a well water pump to the raw-water storage tank. Raw water in the raw-water storage tank will be used to supply the process-water tank, gland water, reagent mixing, and fire-protection requirements. The raw water tank is sized to include a fire water reserve.

17.4.9.2 Potable Water

Potable water will be sourced from the raw water tank and treated in the potable water treatment plant. Treated water will then be stored in the potable-water storage tank for distribution by two potable-water pumps in a duty/standby configuration.

17.4.9.3 Gland Water

Gland water will be supplied from the raw-water tank and distributed to the plant by two gland-seal water pumps in a duty/standby configuration.

17.4.9.4 Process Water

Process water primarily consist of TSF reclaim water. Process water will be stored in the process-water storage tank and distributed by two process-water pumps, in a duty/standby configuration.

17.5 Sampling and Metallurgical Laboratory

The process plant will be equipped with automatic samplers to collect shift and routine samples for aqua-regia digestion, AA analysis, and fire assays. Samples to be taken will include head, intermediate products, tailings, and doré. The data obtained will be used for product quality control, metal accounting and process optimization.

The metallurgical laboratory will perform metallurgical tests for quality control and optimization of the process flowsheet. The laboratory will include equipment such as laboratory crushers, ball mill, sieve screens, bottle rollers, leach reactors, balances, DO meters, and pH meters.


17.6 Projected Energy Requirements

The installed power for the process plant will be 4,445 hp and the power consumption is estimated to be 72 kWh/ton processed.

17.7 Project Water Requirements

The overall projected plant water balance is shown in Figure 17-3.

Figure 17-3: Plant Water Balance

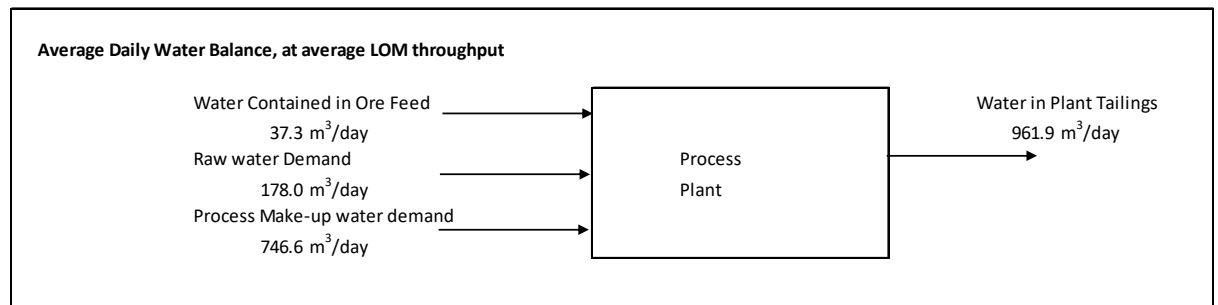

Note: Figure prepared by Ausenco, 2020.

18 PROJECT INFRASTRUCTURE


18.1 Introduction

Infrastructure contemplated in the 2020 FS includes:

- Underground mine, including portal and decline;
- Roads: main access road, site access road, borrow pit haul road, tailings facility haul road, waste rock dump haul road, explosives light vehicle access road and ventilation raise and laydown light vehicle access road;
- Site main gate and guard house;
- Administration building, training, first aid, change house and car park;
- Control room;
- Reagent storage area;
- Gold room;
- Assay laboratory and sample preparation area;
- Plant workshop and warehouse;
- Truck shop, warehouse, wash pad;
- Fuel facility, fuel storage and dispensing;
- Water wells;
- 14.4 kV overland power line;
- Fresh water supply and treatment;
- Raw water tank;
- TSF;
- WRSF;
- Explosives magazine.

A layout of the proposed major infrastructure is included in Figure 18-1.

Figure 18-1: Proposed Infrastructure Layout Plan

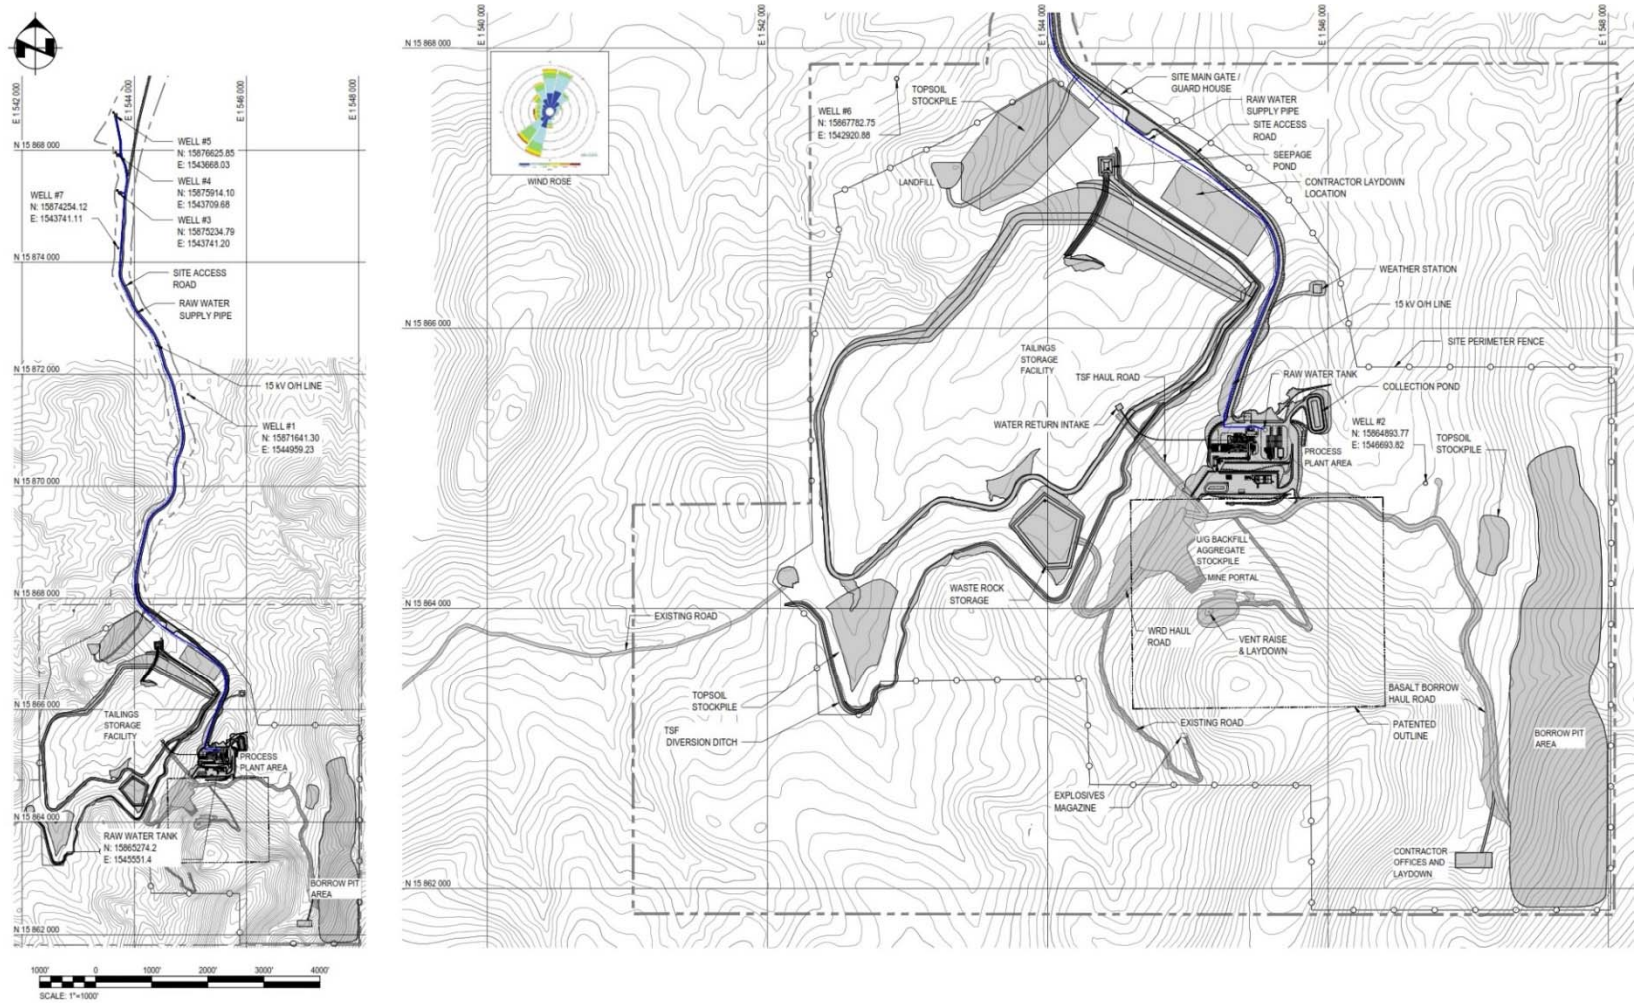

Note: Figure prepared by Ausenco, 2020

18.2 Access

Access to the Project area is described in Section 5. The 2020 FS envisages that the main access road to Grassy Mountain will use an existing BLM road to the site. This road is approximately 17 miles long and will be upgraded to include some straightening and widening in portions.

18.3 Waste Rock Storage Facility

The following summarizes the results and interpretations for the waste rock storage facility based on data collected and engineering means and methods presented in the 2019 detailed design report (Golder, 2019b).

The mined waste rock will ultimately be used as CRF material. The 2020 FS assumes that the cement will lock in and neutralize potential acid generation when backfilled into the stopes; further work will be necessary to confirm this assumption.

During operation, a stockpile of waste rock will be managed on the surface to be used as CRF as needed. As required by the Oregon Administrative Rule, the potential sulfides in the waste rock material requires the temporary waste rock storage facility (WRSF) to be a geomembrane-lined facility. The containment and drainage collection systems installed below the WRSF will be the same systems used for the TSF impoundment basin described in Section 18.5.

Above the geomembrane liner, a collection system consisting of perforated piping will be installed within the drainage layer to collect any water coming in contact with the waste rock.

The location of the WRSF, adjacent to the TSF, will allow the lining system to tie into the TSF lining system to provide continuous containment (see Figure 18-2). The WRSF collection pipe will gravity drain through the TSF impoundment where it will be installed within the TSF drainage layer and ultimately outlet at the TSF Reclaim Pond for independent monitoring and management. The WRSF collection pipe will remain isolated from the TSF underdrain collection system so the water can be handled separately, if necessary.

During reclamation, the closure cover utilized for the TSF will also be installed above the WRSF for long-term closure. Further discussion of the WRSF closure strategy is discussed in Section 20.7.

18.4 Borrow Pit

A borrow pit will be located on the east side of the mine area (refer to Figure 18-1) where there are basalts that are believed to be suitable for construction, mine-backfill and reclamation materials:

- Construction: run-of-mine (ROM) material for fill and TSF-embankment construction, as required;
- Backfill: backfill and CRF material for backfilling of underground stopes; crushed to -6 inches;
- Reclamation: capping material where required.

A small borrow pit north of the processing area is planned for additional construction material.

Borrow material will be generated using contract mining. During initial construction where more material is needed, the borrow mining will use larger equipment, while smaller equipment will be used during production when the amount of material required is reduced. A small contractor laydown-yard is planned near the main borrow source area.


18.5 Tailings Storage Facility

The following summarizes the results and interpretations for the tailings storage facility based on data collected and engineering means and methods presented in the 2019 detailed design report (Golder, 2019b).

18.5.1 Design

The proposed TSF will cover approximately 108 acres and will be located in a broad valley immediately west of the location for the proposed Grassy Mountain mine portal and process facilities. The proposed design is provided in Figure 18-2.

Figure 18-2: Proposed TSF

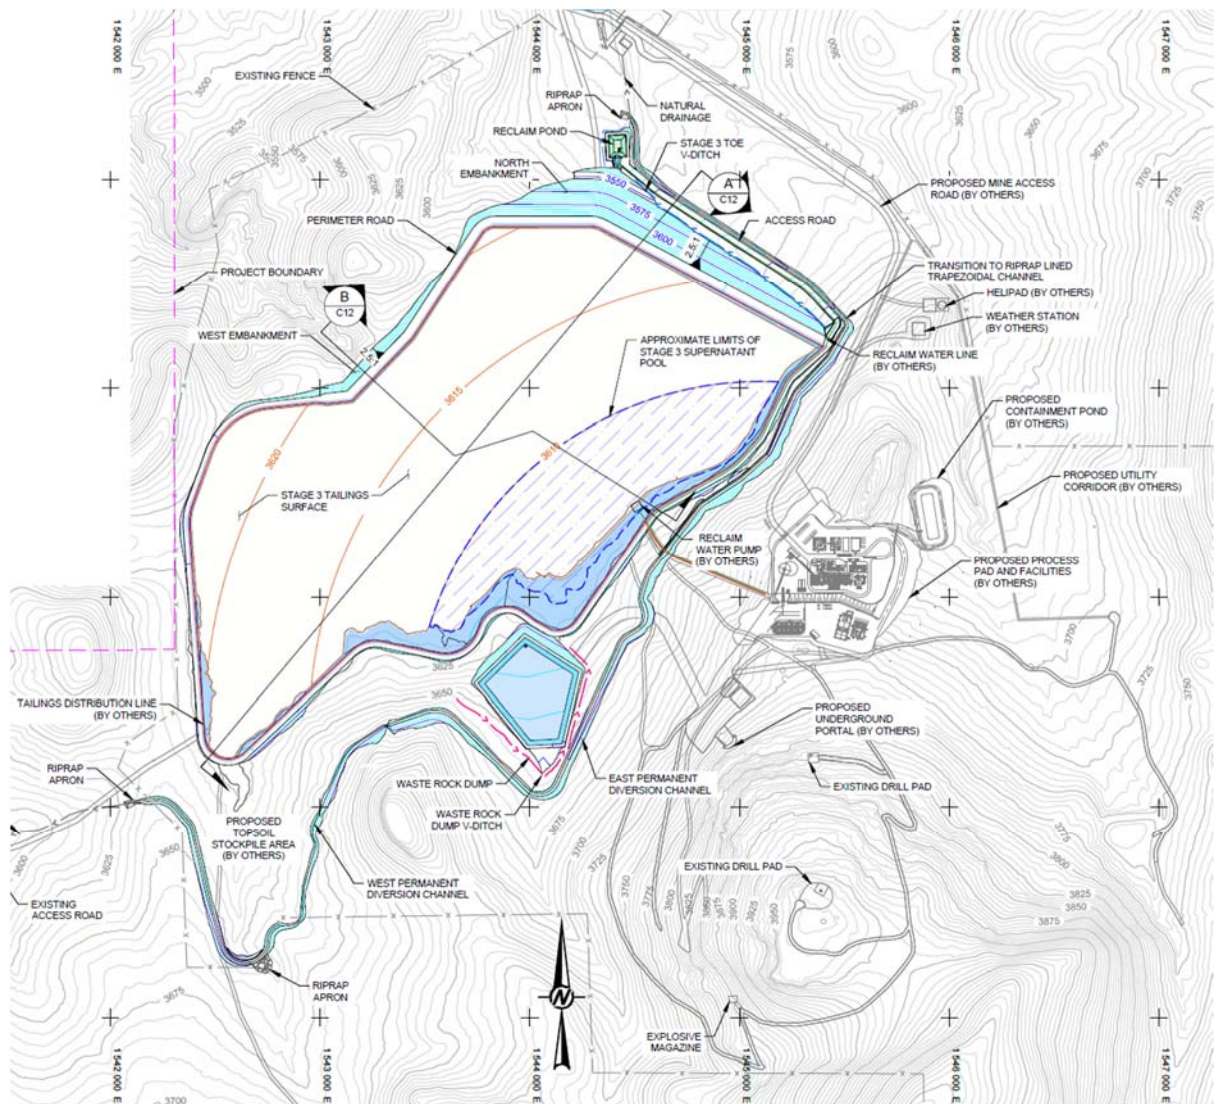

Note: Figure prepared by Golder, 2019. Grid squares as indicated by cross marks shown in figure are 1 km x 1 km.

The TSF will fill the valley and require embankments on the north and west sides to impound the tailings. The main embankment will cross the natural drainage on the north side of the TSF, and a secondary embankment will be constructed along the western ridge.

The TSF was designed using industry accepted professional engineering principles and practices with the intent of providing a long-term, geotechnically-stable facility. The design principles and practices implemented meet the requirements of the Oregon Administrative Rules for environmental protection.

Geotechnical testing and consolidation modelling performed by Golder estimate a tailings settled dry density of 80 lb/ft³. Based on the TSF design, the Stage 3 TSF will provide a total storage capacity of 3.67 Mtons. However, for the 2020 FS mine production, 2.07 Mtons are planned to be delivered to the TSF, and, therefore, only Stages 1A, 1B, and 2 will be required for the 2020 FS mine life. The design capacity considerations for each stage are outlined in Table 18-1.

Table 18-1: Stage Capacity Relationship

Stage	Elevation (ft) Main Embankment Crest	Maximum Tailings Surface	Maximum Tailings Surface Area (acres)	Storage Capacity (M tons)	
				Stage	Cumulative
1A	Varies (Min. 3570)	3568	14.1	0.40	0.40
1B	Varies (Min. 3595)	3593	37.0	0.60	1.00
2	Varies (Min. 3609)	3607	59.5	1.07	2.07
3	Varies (Min. 3622)	3620	83.0	1.60	3.67

The embankments will be constructed in three primary stages. Stage 1 will be separated into two intermediate stages (Stage 1A and 1B). Stage 2 and Stage 3 will be constructed as downstream raises along the north and west embankments. The embankments will be constructed of soil and/or rock materials using downstream construction methods. Suitable embankment materials will be generated from the on-site basalt borrow area and during impoundment grading operations. The embankments will have a maximum overall upstream slope of 3H:1V, with a downstream slope of 2.5H:1V. The overall embankment slopes are suitable for long-term geotechnical stability, closure, and meeting Oregon Administrative Rules requirements. The north and west embankments will have a maximum height of 84 feet and 30 feet, respectively. The crest width of the north embankment will be 50 ft, and the smaller west embankment will have a 30-ft wide crest. The TSF is designed as a “zero discharge” facility to meet Oregon Administrative Rules requirements. To achieve this, the facility will be a 100% geomembrane-lined facility with a continuous, engineered lining system extending across the impoundment basin and the upstream slope of the embankments.

The embankments are designed to be geotechnically stable during normal operation, and during the design seismic event. For this design, Golder performed a site-specific seismic and faulting hazard assessment to estimate peak ground motions resulting from various seismic events. The maximum credible earthquake (MCE) was selected as the design seismic event for long-term closure. This selected design seismic event is suitable for any hazard classification determined by regulatory agencies.

To achieve “zero discharge” and provide environmental containment as required by the Oregon Administrative Rules, the composite lining system within the impoundment basin will consist of (from bottom to top) a six-inch to 12-inch thick prepared subgrade, a 300-mil thick enhanced geosynthetic clay liner, 80-mil HDPE geomembrane liner, an 18-inch thick drainage layer, and a six-inch thick filter layer. An underdrain collection system consisting of perforated piping will be located within the drainage layer to promote drainage of the tailings. The upstream slope of the embankments will use the same composite lining system, but without the overlying piping, drainage and filter layers.

A reclaim pond, located downstream (north) of the TSF, will capture all tailings draindown collected in the underdrain collection system from the tailings. To achieve “zero discharge” and provide environmental containment as required by the Oregon Administrative Rules, the lining system for the reclaim pond will consist of (from bottom to top): a prepared-in-place subgrade, 60-mil HDPE

secondary geomembrane liner, HDPE geonet, and 80-mil HDPE geomembrane primary liner. The geonet located between the two geomembranes will serve as the leakage collection and recovery system.

The supernatant pool will be maintained away from the embankments on the eastern side of the facility by controlled deposition of tailings from spigots installed around the perimeter of the facility. Water separating from the tailings solids after deposition will be managed with two independent return-water systems. One will manage flows collected in the reclaim pond from the underdrain collection systems and the other will manage water collected in the supernatant pool. The supernatant pool will be managed with a pump installed either on the eastern edge of the facility or on a floating barge within the pool. Water from both systems will be returned to the mill for use in the process circuit. At all times, process fluid pipelines will be located above secondary containment that consists of either geomembrane liners or reinforced concrete containment structures.

The TSF will be capable of storing runoff from tributary areas and direct precipitation on the facility resulting from the 500-year, 24-hour storm event, as well as an allowance for wave run-up due to wind action. Permanent and temporary stormwater diversions will collect and divert a majority of the stormwater runoff around the facility to a natural drainage on the north side of the TSF.

18.5.2 Monitoring

The TSF design was advanced to construction-level to support on-going State and Federal permitting. To support construction-level design and permitting, Golder prepared a detailed geotechnical monitoring plan that defines the roles and responsibilities of key stakeholders (Owner, operator, engineer) for safe and stable TSF construction and operation. Monitoring will be accomplished through both measurements of the monitoring points and visual observations of surface conditions.

18.5.3 Closure

When mining operations are complete, active tailings deposition from the mill into the TSF will cease. Water collected in the reclaim pond will be recirculated to the supernatant pool for active water management. Over time, the supernatant pool will evaporate and the underdrain flows reporting from the TSF will reduce as the tailings consolidate and drain.

Under the conceptual closure plan, once the tailings surface no longer has a free water surface and the tailings continue to desiccate and densify, a closure cover will be constructed over the tailings surface and TSF embankments. The conceptual closure plan recommends that installation of the closure cover is at a point in time where the majority of tailings consolidation has occurred and is not expected to negatively impact drainage of the closure cover.

The remaining waste rock (if any) stockpiled on the WRSF will be removed and placed as an operation layer above the tailings surface when it is safe to do so. The WRSF lining system will either be removed or buried.

Stormwater falling on the TSF and upgradient catchment areas, below the permanent diversion channels, will be routed over the covered impoundment surface to a closure drop chute channel located at the eastern abutment of the north embankment. The closure drop chute and impoundment surface swale are designed to safely convey stormwater flows resulting from a 500-year, 24-hour storm event.

Once tailings draindown flow rates reduce to levels suitable for passive water management (depending on the long-term passive management system), the reclaim pond will be retrofitted to a geomembrane-lined evaporation pond. With installation of the closure cover and gravity drainage from the underdrain collection system, it is expected that draindown from the TSF will cease. Once drainage from the TSF has ceased, the evaporation pond will be removed.

18.6 Water Management


18.6.1 Contact and Non-Contact Water Management

The following summarizes the results and interpretations for the stormwater diversion channels based on data collected and engineering means and methods presented in the 2019 Hydrology Analysis and Stormwater Diversion Recommendations for the Process and Portal Pads (Golder, 2019a), 2019 detailed design report (Golder, 2019b) and 2019 stormwater pollution control plan (Golder, 2019c).

The Project site is located approximately 6.5 miles northwest of Lake Owyhee in the semi-arid plateau of eastern Oregon and local landscape is typical of high mountain desert environment and rangeland. The terrain is gentle to moderate with relatively low relief. Elevation ranges from approximately 4,050 feet above mean sea level at the southeastern corner of the proposed borrow pit area to 3,330 feet above mean sea level north of the TSF reclaim pond. Drainage at the site is generally to the north in ephemeral natural drainages. No perennial streams or wetlands exist at the site.

The Project site is divided into three main hydrologic catchment areas. Each catchment area was used to size temporary and permanent diversion channels that route water around the zero-discharge process areas. The catchment areas are shown on Figure 18-3.

Figure 18-3: Hydrologic Catchment Areas

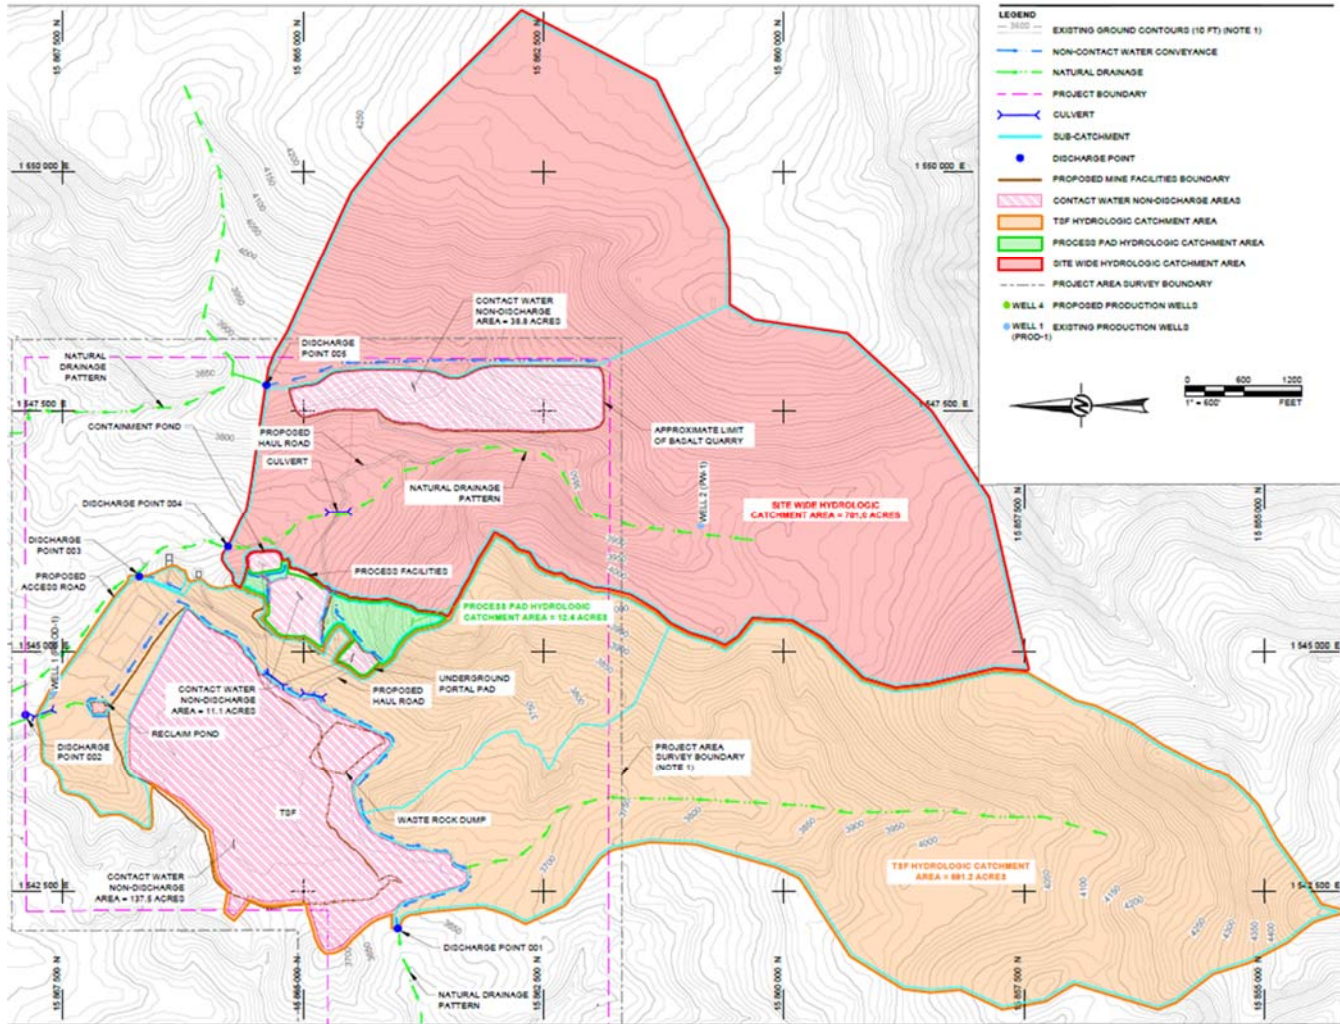

Note: Figure prepared by Golder, 2019.

The defined areas are:

- TSF area: All western hydrologic catchment areas draining to the TSF area; 688 acres;
- Process pad and portal pad area: All interior hydrologic catchment areas draining to the processing area and portal; 12.4 acres;
- Site wide area: All eastern hydrologic catchment areas draining to the planned borrow pit area and the catchment for the existing natural drainage immediately west of the borrow pit; 664 acres.

The overall Project site catchment area has a total tributary area covering approximately 1,350 acres. Hydrologic catchments areas were developed based on existing topographic features and identifying areas where calculated peak flows will be required for hydraulic design of drainage improvements. A summary of the non-contact hydrologic catchment areas is provided in

Table 18-2: Non-Contact Hydrologic Catchment Areas

Hydrologic Catchment Area	Total Area (acres)
TSF area	688
Process pad and portal pad area	12.4
Site-wide area	664

Hydrologic and hydraulic analyses were completed with weighted average soil characteristic curve numbers and time of concentrations. This model developed flows from each sub-basin for the 25-year, 24-hour; 100-year, 24-hour; and the 500-year, 24-hour storm events. The flows were used to design the surface water diversion and contact water collection channels, culverts, and outlet aprons.

As required by the Oregon Administrative Rules, the following design storm events and freeboard capacity were applied:

- Permanent channels: 100-year, 24-hour storm event with 9 inches of freeboard, or 500-year, 24-hour storm event without overtopping;
- Temporary channels: 25-year, 24-hour storm event with 9 inches of freeboard, or 100-year, 24-hour storm event without overtopping.

All culverts were designed to only be in place during operation and were therefore designed to convey the 25-year, 24-hour storm event. Channel velocities were reviewed by Golder during hydraulic design of the stormwater diversion channels to determine appropriate channel lining systems for erosion protection. In most areas, unless in permanent diversion channels, the channels will be either unlined or riprap-lined with variable stone sizes. In areas where channel velocities exceeded the reliability limits of a natural soil lining, riprap lining systems will be used. Dissipation aprons will be located at permanent channel discharge points around the TSF where run-off will be being discharged into existing natural drainages to encourage a smooth transition into the existing drainage and minimize erosion to the natural slopes.


Non-contact water runoff is designed to flow into natural drainages downstream of the site to unnamed tributaries of Negro Rock Canyon that in turn discharges to the lower Malheur River. Meteoric water contacting the process plant site and associated infrastructure will be diverted through contact water

diversion ditches and channels to a geomembrane-lined contact water pond to be located east of the process plant.

The process plant contact water pond will be a geomembrane-lined containment pond using a dual containment and leakage collection system.

Figure 18-4 shows the proposed locations of the structures to control contact and non-contact surface water routing around the plant site.

Figure 18-4: Process Plant Stormwater Contact and Non-contact Catchment Areas

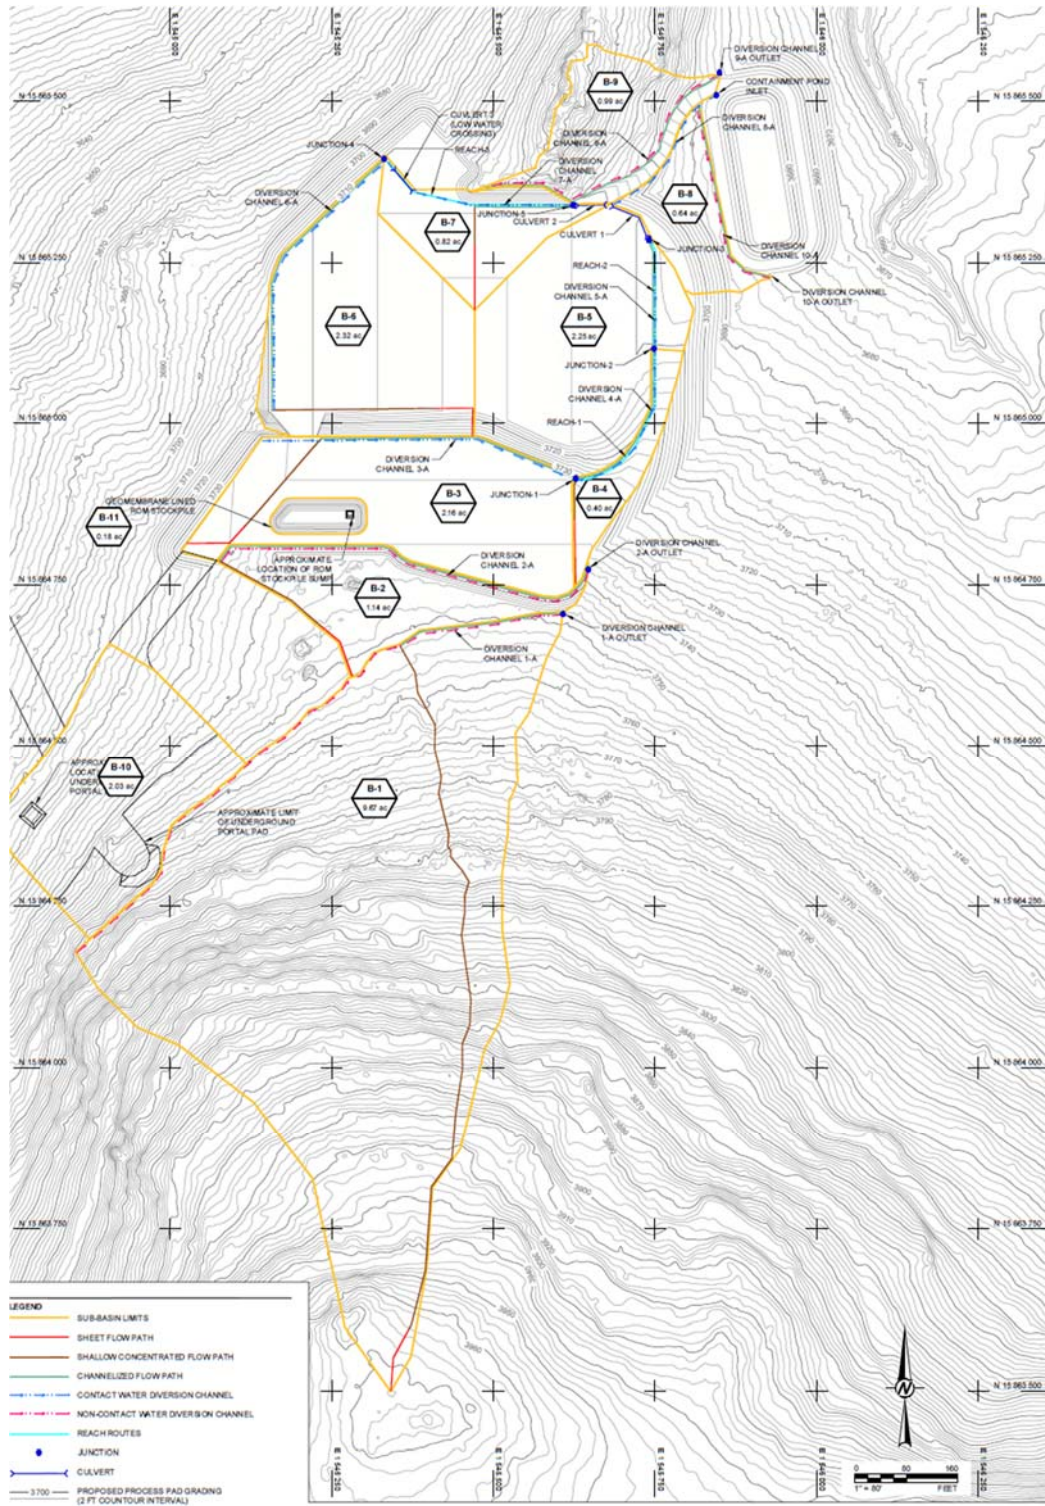

Note: Figure prepared by Golder, 2019.

To support design of the TSF and WRSF, hydrologic and hydraulic analyses were completed with weighted average soil characteristic curve numbers and time of concentrations. This model developed

flows from each sub-basin for the 25-year, 24-hour; 100-year, 24-hour; and the 500-year, 24-hour storm events. Detailed hydrologic analyses and design details for the catchments are included in Golder (2019b).

These flows were used to design the surface water diversion and contact water collection channels, culverts, and outlet aprons for the Project. As required by the Oregon Administrative Rules, the following design storm events and freeboard capacity were applied:

- Permanent channels: 100-year, 24-hour storm event with nine inches of freeboard, or 500-year, 24-hour storm event without overtopping.
- Temporary channels: 25-year, 24-hour storm event with nine inches of freeboard, or 100-year, 24-hour storm event without overtopping.

All culverts on the project site were designed to only be in place during operation and were therefore designed to convey the 25-year, 24-hour storm event.

Channel velocities were reviewed by Golder during hydraulic design of the stormwater diversion channels to determine appropriate channel lining systems for erosion protection. In most areas, unless stated otherwise in Golder (2019b; 2019c), permanent diversion channels will either be unlined or riprap-lined with variable stone sizes. In areas where channel velocities exceeded the reliability limits of a natural soil lining, riprap lining systems were used. Dissipation aprons are located at permanent channel discharge points as shown on Figure 18-3 around the TSF where run-off is being discharged into existing natural drainages to encourage a smooth transition into the existing drainage and minimize erosion to the natural slopes.

Non-contact water runoff from the Project site is designed to flow into natural drainages downstream of the site to unnamed tributaries of Negro Rock Canyon which in turn discharges to the lower Malheur River. Meteoric water contacting the process plant site and associated infrastructure will be diverted through contact water diversion ditches and channels to the geomembrane-lined contact water pond located east of the process plant as shown on Figure 18-4.

The process plant contact water pond, designed by Ausenco, will be a geomembrane-lined containment pond using a dual containment and leakage collection system. The containment system consists of (from bottom to top):

- Prepared subgrade;
- 12 inches of soil liner bedding;
- 60 mil HDPE geomembrane liner;
- Geonet;
- 80 mil HDPE geomembrane liner.

Water entering the process plant containment pond will be used in the process circuit or evaporated.

18.6.2 Water Balance

A high-level water balance was developed based on the following assumptions:

- Annual average water demands from the process plant mass balance (estimated by Ausenco);
- Usage of water extracted from dewatering operations in the process circuit and to supply the underground mining equipment (estimated by Lorax):
 - Low dewatering estimate = 12 gpm;

- Mid-range dewatering estimate = 23 gpm;
- High dewatering estimate = 78 gpm;
- Water for underground equipment, of about 76 gpm (estimated by MDA) will be sourced from underground dewatering and raw water production and recirculated as needed;
- Tailings slurry concentration of 42.4% solids, by weight, during deposition (estimated by Ausenco);
- Climate conditions based on TSF water balance (estimated by Golder, 2019b);
- Water collected in the process plant contact water pond will be used in the process circuit or evaporated;
- Additional raw water will be supplied by the proposed production wells as make-up water.

Water demands will vary seasonally (Table 18-3).

Table 18-3: Annual Average Water Balance

Item		M gallons/year
Demand	Total water for tailings discharge	92.8
Demand total		92.8
Source/supply	Raw water for elution circuit	17.2
	Ore feed	3.6
	Underground dewatering	12.1
	TSF return water	47.5
	Plant contact water pond	0.4
Source/supply total		80.7
Make-up water		12.1

Note: Table based on average annual climate and mid-range dewatering estimate.

Water supply from the raw water production wells and mine dewatering is projected to be sufficient to support the 2020 FS mine plan requirements and during seasonal fluctuations. Water demands are expected to increase and decrease seasonally and during periods of extended dry and wet climactic years, respectively. During periods of extended dry conditions, additional make-up water from the production wells may be required. During extended periods of wet conditions, raw water from the production wells will be reduced as needed. Additionally, if operated within the design parameters, the TSF supernatant pool may be used to provide seasonal buffer for water demands. On an as-needed basis, enhanced evaporation through the use of spray evaporators over the tailings surface during the dry season can be implemented.

18.7 Built Infrastructure

The built infrastructure requirements are summarized in Table 18-4.

Table 18-4: Built Infrastructure Requirements

Item	Comment
Process plant	Steel-frame and metal clad building with an area of 7,000 ft ² . Will include a bridge crane that comes with an electric chain hoist and trolley and control pendant

Item	Comment
Process plant control room	Single-level modular steel container, modular building, preassembled. Will include insulated steel doors, windows, operator's desk, soundproof and dustproof with an area of 135 ft ² .
Gold room	Pre-cast masonry building of approximately 1,000 ft ² . Will include an electric chain hoist and trolley
Assay laboratory	Single-level steel containers of approximately 2,715 ft ² to be situated adjacent to the process building. Will include sample receiving and preparation, fire assay, weighing room, wet analytical laboratory, dry instrument room, and utilities and storage modules. Will house the laboratory equipment for assaying, metallurgical, and environmental requirements. Dust-collection equipment will be located external to the laboratory building. The building will be serviced with power, water, air conditioning and heating, communications, air and mercury scrubbers, and fume hoods.
Process plant workshop and warehouse	Pre-engineered steel-frame and metal clad building of approximately 2,540 ft ² . Will be used to perform maintenance for process equipment, as well as for the storage of equipment spare parts
Administration building	Single level modular wood frame, 80 x 110 ft for a total footprint of approximately 8,800 ft ² . Will house the site management team, including general management, commercial and administration management, engineering, mine operations, senior processing, and maintenance personnel. Will be serviced with power, water, air conditioning and heating, communications.
Contractor office and laydown	Modular trailer with an area of 160 ft ²
Truck workshop and warehouse	Pre-engineered steel-frame and metal-clad building with an area of 6,250 ft ² . Will be positioned adjacent to the mine-office building. Will be divided into two sections, one for warehousing spare parts and tool storage and the other for a maintenance workshop. A bridge crane will be included
Vehicle wash-bay	Open-air, 50 x 50-ft concrete slab with a fluid-collection sump and oil-water separator that will be located adjacent to the truck workshop and warehouse. Wash water will be collected in the sump where settling will occur prior to the water being recirculated back to the wash system. The oil-water separation system will recover hydrocarbons prior to re-use of the wash water. The recovered hydrocarbons will be collected and shipped offsite for disposal in accordance with applicable environmental regulations.
Security gate house	Pre-assembled wood-frame modular building with an area of 325 ft ² . The building will include lift gates and one turnstile. 22,350 ft of security fencing will be installed around the entire mine site, including the borrow source area. There will be a main gate where the main access road enters the site, and a second gate will be placed at the southern end of the property. The southern access gate is anticipated to remain locked with access only allowed as needed.
Explosives-storage facilities	Will be constructed at the southwest side of the mine area. This location uses a hill as a natural barrier between the explosives-storage facility and other infrastructure. Will consist of a powder magazine in accordance with current applicable explosives regulations. Dirt berms will be placed around the magazines for additional security. Explosives will be delivered to site by vendors using the main access.
Fuel	Two double-walled steel tanks will be used for diesel storage. The total volume between the two tanks is 8,250 gal. Will be used by the underground equipment. A fuel truck will be used to fuel underground equipment as required and may be used to fuel surface equipment as needed.
Air	High-pressure compressed air will be provided by one duty screw compressor, one standby screw compressor, and a duty-plant air receiver. Two high-pressure air uses: instrument air and plant air. Instrument air will be dried and then stored in a

Item	Comment
	dedicated air receiver. Plant air will be fed straight from the plant air receiver without a drying step. Low-pressure air for pre-aeration tank air requirements will be provided by two duty and one standby rotary air compressor.
Communications	On-site communications will comprise inter-connected mobile and fixed systems, including a land-line telephone network, portable two-way radios, and internet. Access for internet and corporate network connection will be made via satellite connections. Underground communication with the surface will be via a leaky-feeder system

18.8 Camps and Accommodation

No accommodations camps are envisaged. Personnel are expected to reside in nearby communities such as Vale and Boise.

18.9 Power and Electrical

The power supply will initially be from diesel power generators located on site. The diesel power generators will be used for approximately one year during initial construction and the initial mining of the decline. During the construction period a new power line would be constructed along the main access road to site. Once construction of the primary power lines is completed, the generators will remain on site for backup in case of power outages.

The construction of line power will deliver approximately 5.3 MW of power to site, and will require a 23-mile distribution circuit, a new 69/34.5 kV to 14 MV transformer, and a new 34.5kV 67-amp regulator. The power line would be constructed from the Hope Substation near Vale to the mine site along the main access road.

The plant power distribution from the powerhouse will be via overhead powerlines. The distribution voltage to the local electrical rooms will be 14.4 kV. There will be a combination control-room and motor-control-center room. This room will be pre-fabricated and loaded with electrical equipment prior to delivery to site. The power distribution from the electrical rooms will be 480 V.

The total connected load for the process plant is expected to be 4.8 MW, with an average power draw of 3.6 MW. Power requirements for the underground mine are discussed in Section 16.11.

19 MARKET STUDIES AND CONTRACTS

19.1 Introduction

The proposed Grassy Mountain operation will produce doré bars on site, which will then be shipped to an out of State refinery. There is currently no contract in place with any refinery or buyer for the doré.

19.2 Market Studies

No market studies have been completed. Gold and silver are freely-traded commodities. The doré that will be produced by the mine is considered to be readily marketable.

The doré bars are forecast to have a variable gold and silver content with an expected gold to silver ratio of 44–49% gold to 51–56% silver.

The economic analysis in Section 22 assumes that Paramount will be paid 99.9% of the gold value and 99.5% of the silver value by a refinery (Table 19-1). Ausenco conducted a benchmarking analysis that estimated refining charges of \$5/oz payable gold and \$0.50/oz payable silver, totaling direct refining cost of approximately \$2 M over the LOM.

Table 19-1: Estimated Payability and Refining Costs

Item	Value
Proportion of Au	46%
Proportion of Ag	54%
Payable gold	99.9%
Payable silver	99.5%
Refining charges Au	\$5.00/oz
Refining charges Ag	\$0.50/oz


19.3 Metal Pricing and Projections

19.3.1 Economic Analysis

The economic analysis included in the 2020 FS uses a two-year average of gold and silver prices as of August 31, 2020. The estimated prices are based on the daily closing price of gold and silver prices from the London Bullion Market Association (LBMA).

Figure 19-1 and Figure 19-2 show the LBMA gold and silver prices respectively over the past two years ending August 31, 2020.

Figure 19-1: London Bullion Market Association Gold Price (2-year span, US\$/oz)

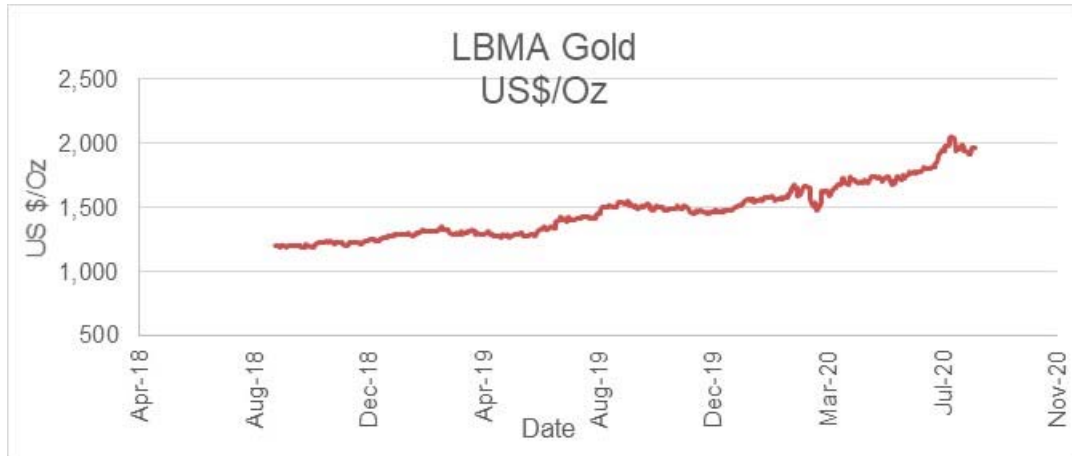

Note: Figure from S&P Market Intelligence, September, 2020.

Figure 19-2: London Bullion Market Association Silver Price (2-year span, US\$/oz)



Note: Figure from S&P Market Intelligence, September, 2020

Although some recent feasibility or pre-feasibility studies that are publicly-available are using consensus estimates for gold and silver prices, which are higher, Paramount and the QPs consider that the two-year average reflects a more conservative approach, and is in-line with the US Industry Guide 7. The gold and silver prices used in the economic analysis are:

- Gold price: \$1,471.59/oz;
- Silver price: \$16.64/oz.

Metal prices were kept constant throughout the life of the Project.

19.3.2 Metal Pricing Forecasts

Paramount expects to commence production at Grassy Mountain within four years. Paramount reviewed gold price forecasts by several financial institutions, which, in the mid-term, indicate the


potential for significantly higher gold prices than those applied in the base case scenario in this Report (Table 19-2; Figure 19-3). Higher gold prices represent Project upside potential.

Table 19-2: Mid-Term Gold Price Estimate by Year from Various Organizations

Firm	2020	2021	2022	2023	2024
Commerzbank AG	1,800	2,125			
Deutsche Bank AG	1,709	1,956	1,622	1,659	1,698
Fitch Solutions	1,850	1,850	1,700	1,650	
Westpac Banking Corp	1,799	1,835	1,673	1,710	
Capital Economics Ltd	1,800	2,050	2,100		
Citigroup Inc	1,750	1,965			
Landesbank Baden-Wuerttemberg	1,800	1,870	1,800		
BNP Paribas SA	1,765	1,965			
Intesa Sanpaolo SpA	1,798	1,900	1,825	1,775	1,700
MPS Capital Services Banca per le Imprese SpA	1,730	1,850	2,000		
Emirates NBD PJSC	1,719	1,675			
ABN AMRO Bank NV	1,750	1,950			
Natixis SA	1,723	1,811			
Incrementum AG	1,820	2,128	2,600	2,800	3,200
Market Risk Advisory Co Ltd	1,718	1,744	1,625	1,600	1,500
Average	1,769	1,912	1,883	1,866	2,025
Median	1,765	1,900	1,800	1,685	1,699

Table sourced from Bloomberg, September 2020.


Figure 19-3: Mid-Term Gold Prices Forecast by Various Institutions (2020–2024)

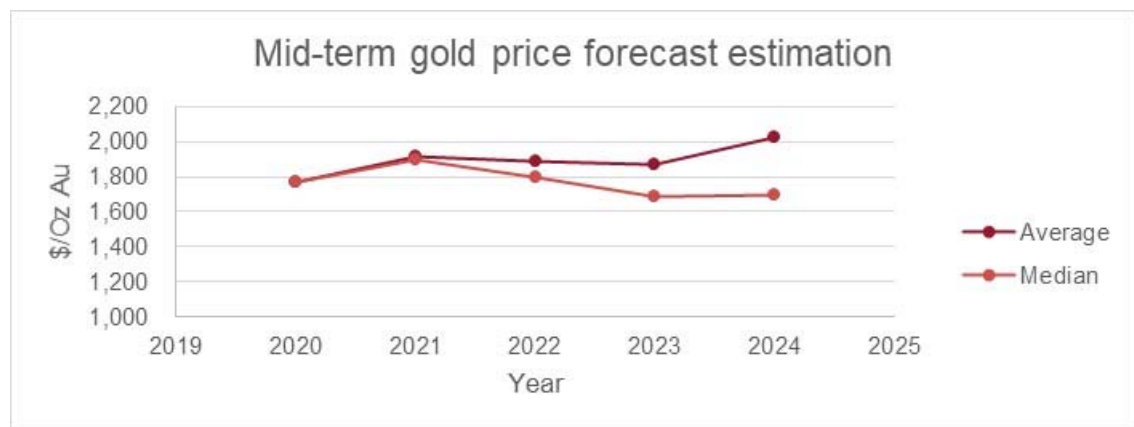

Note: Figure prepared by Ausenco, 2020, based on data in Table 19-2.

A review of current gold futures contracts traded on the COMEX market, over a five-year period (Figure 19-4), also reflect significantly higher gold prices, ranging between \$1,900 and \$1,983/oz Au, than the pricing used in the base-case scenario.

Figure 19-4: Historical Gold Price and Futures Gold Contracts on the COMEX Market

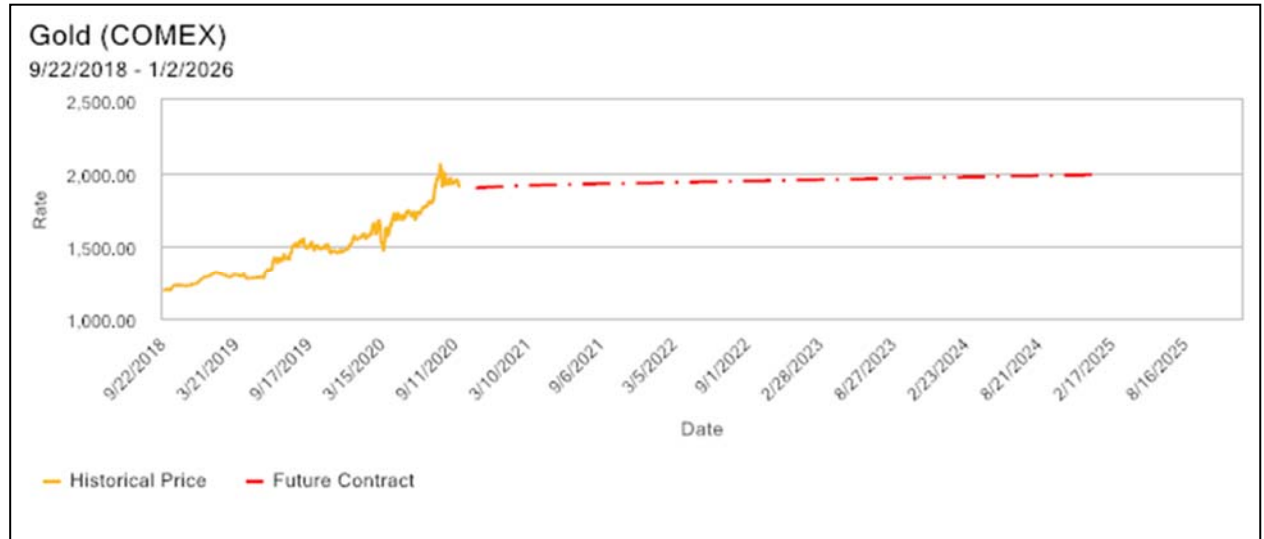

Note: Figure courtesy Paramount, data from Commodity Exchange (COMEX). September 2020.

19.4 Contracts

Paramount has no current contracts for property development, mining, concentrating, smelting, refining, transportation, handling, sales and hedging, forward sales contracts or arrangements.

It is expected that when any such contracts are negotiated, they would be within industry norms for projects in similar settings in the US.

19.5 QP Comment

The doré that will be produced by the planned operation is readily marketable.

Metal pricing used in the economic analysis in Section 22 is based on a two-year trailing average, and forecasts \$1,471.59/oz Au and US\$16.64/oz Ag. Based on financial institution and COMEX futures forecasts, there is potential upside for the Project if the elevated gold prices predicted in those forecasts occur during the Project production period.

The QP has reviewed commodity pricing assumptions, marketing assumptions, and the potential major contracts that may be entered into, and considers the information acceptable for use in estimating Mineral Resources, Mineral Reserves, and in the economic analysis that supports the 2020 FS.

20 ENVIRONMENTAL STUDIES, PERMITTING, AND SOCIAL OR COMMUNITY IMPACT

20.1 Introduction

Permitting activities began in 2012 with engagement with the State of Oregon and collection of baseline data. In November 2019, Calico submitted a Consolidated Permit Application to the Department of Geology and Mineral Industries (DOGAMI). DOGAMI determined that additional information was necessary to complete the application. Calico submitted an updated Plan of Operations (PoO) to the Bureau of Land Management (BLM) in September 2017. In February 2020, a revision to the PoO was submitted to the BLM. The BLM also determined that additional information was necessary to complete the PoO. The PoO assumes approximately 320 acres of proposed surface disturbance (Table 20-1).

Table 20-1: Surface Disturbance for the Proposed Project

Component	Public Acres	Private Acres	Total Acres
Portal area	0.0	0.5	0.5
Waste rock storage area	8.4	0.0	8.4
Tailings storage facility	99.2	0.0	99.2
Process/administration area ⁽¹⁾	6.5	0.7	7.2
Laydown/yard areas	65.5	8.2	73.7
Roads	21.6	3.3	24.9
Water tank	0.0	0.1	0.1
Water Wells and Water Pipeline ⁽²⁾	6.5	0.6	7.1
Fence ⁽³⁾	15.5	0.0	15.5
Borrow areas	42.9	0.0	42.9
Diversion Ditches and Sediment Basins	11.9	0.0	11.9
Growth media stockpiles	18.2	0.0	18.2
Exploration ⁽⁴⁾	5.0	5.0	10.0
Total	301.2	18.4	319.6

Note: (1) This includes the mill, refining plant, administrative building, parking lot, security building, mining contractor yard, reagent storage, assay laboratory, and substation. (2) Includes the water supply pipeline at 16,164 ft with a 30-ft construction disturbance width and well locations at 0.25-acre each. (3) Includes the perimeter fence at 22,358 ft with a 30-ft construction disturbance width. (4) The actual location of the exploration activities within the Project area is currently unknown and is assumed to be equally on public and private lands.

20.2 Permit History

Permitting activities for the Grassy Mountain Project have spanned 30 years. During the late 1980s Atlas collected geologic, mine engineering, civil engineering, and environmental baseline data to support a feasibility study that was completed in 1990. During 2012 to 2016, Calico began the permitting process for an underground-mining operation at Grassy Mountain. Since the acquisition of Calico by Paramount in 2016, the permitting process has continued with DOGAMI, Malheur County, and the BLM.

20.3 Project Permits

The Project will require the following major environmental permits to construct, operate, and close:

- A PoO from the BLM;
- A DOGAMI Consolidated Permit for Mining Operations;
- An Oregon Department of Environmental Quality (ODEQ) Chemical Mining Permit;
- Water rights from the Oregon Department of Water Resources;
- An Air Quality Operating Permit (AQOP) with the ODEQ;
- A Conditional Use Permit from Malheur County.

20.3.1 State of Oregon Permit Processing

Calico entered into a Memorandum of Understanding for Cost Recovery (MOU) with the Oregon DOGAMI on November 3, 2014. A new MOU was signed when the Consolidated Permit Application was submitted in November 2019. The MOU provides a mechanism whereby Calico, as the Project proponent, agrees to reimburse DOGAMI and other primary State agencies for their involvement in processing the Consolidated Permit Application for the Grassy Mountain Project when those fees exceed their permit fees. In addition, DOGAMI hired consulting firms to provide expertise that is not available from the staff that the various agencies are involved with during the permitting process.

The key components of the permitting program with the State of Oregon are as follows:

- Environmental baseline studies for all resource categories described in Chapter 632, Division 37 Chemical Process Mining Rules;
- Meeting all requirements of Division 37 Rules which include, but are not limited to:
 - Preparation of a Consolidated Permit Application;
 - Obtaining all necessary Federal, State, and local permits and authorizations;
 - Satisfying any potentially applicable environmental evaluation requirements;
- Implementing a pro-active community involvement and consultation process including:
 - Local hire preference;
 - Local contracting and purchase where practicable;
 - Mine worker job training to provide an experienced workforce.

A key authorization permit which will be required is the permit for Chemical Processing Mining, as required under Chapter 632, Division 37, 1991 Oregon Laws (§632-037-0005). The Consolidated Permit also requires approval by ODEQ under Division 43, Chemical Mining Rules (OAR 430-043-000), which address other environmental stipulations. “Chemical Process Mining” means a mining and processing operation for metal-bearing ores that uses chemicals to dissolve metals from ore. The Calico processing facility will employ cyanide in the metallurgical process. The Division 37 Rules provide a well-defined regulatory pathway with definitive permitting requirements and timelines.

Calico has filed multiple Notices of Intent (NOIs) under Division 37, which initiate the State permitting process and begin baseline data collection. The reason for the multiple NOIs is that the scope of the operation, as well as the configuration of the Project area have changed. Each change requires the submittal of a new NOI and a re-initiation of the permitting process. In addition, the initial NOI filing was done to initiate the agency Division 37 permit process and provide for public notice that the Project is proceeding into the permitting phase. As part of initiating the public notification, an interagency

“Technical Review Team” (TRT) was organized to provide interdisciplinary review of technical permitting issues for the State Consolidated Permitting Process. This TRT has met numerous times and accepted the NOIs.

In addition, DOGAMI administrators and the TRT have reviewed and approved the “Calico Resources Environmental Baseline Work Plans Grassy Mountain Mine Project”, which was filed on May 17, 2017. In July 2017 a "Notice of Prospective Applicant's Readiness to Collect Baseline Data" was issued to Calico by DOGAMI. The environmental baseline data collection and reporting program is currently in progress, with four reports still requiring acceptance by the TRT.

Calico prepared and submitted the Division 37 Consolidated Permit Application for the Grassy Mountain Gold Mine in November 2019. This single application, as required under Oregon laws, included the following elements:

- General information;
- Existing environment-baseline data;
- Operating plan;
- Reclamation and closure plan;
- Alternatives analysis.

DOGAMI finished their completeness review with input from the TRT. DOGAMI determined that additional information is necessary before further processing of the application. Once the application is determined complete, a Notice to Proceed with the preparation of draft permits will be issued by DOGAMI. This notice will also involve a directive by DOGAMI to use the third-party contractor to prepare an Environmental Evaluation (EE), which is to be issued at least 60 days prior to the issuance of any draft permits. This EE is not a Federal National Environmental Policy Act (NEPA) requirement. It is a State of Oregon requirement which includes:

- Impact analysis;
- Cumulative impact analysis;
- Alternatives analysis (OAR 632-037-0085).

Concurrent with this assessment, DOGAMI will also use the contractor to prepare a Socioeconomic Analysis. This analysis will identify major and reasonably foreseeable socioeconomic impacts on individuals and communities located in the vicinity of the proposed mine. In particular, the analysis will describe impacts on population, economics, infrastructure, and fiscal structure (OAR 632-037-0090).

This process for permit review and approval will also involve a consolidated public hearing on all draft permits, and the draft operating permit. Other applicable State of Oregon and Federal permits may include, but are not limited to the following:

- Permits to appropriate groundwater or surface water, or to store water in an impoundment (ORS 537.130, ORS 537.400, and ORS 540.350);
- Water Pollution Control Facility (ORS 468B.050);
- Storm Water Pollution Prevention Plan (EPA);
- Air Quality Permits (ORS 468A.040);
- Solid Waste Disposal Permit (ORS 459.205);
- Permit for Placing Explosives (ORS 509.140);

- Hazardous Waste Storage Permit (OAR 340-102-0010);
- Land Use Permit (OAR Chapter 632, Division 001);
- Any other State permits, if applicable and required under Division 37.

A Project Coordinating Committee (PCC) was also formed for the purpose of sharing information; further coordinating the Federal, State, and local permitting requirements; optimizing communication; facilitating the regulatory process; and avoiding duplicative effort. The PCC has met formally and conducted a series of public meetings in Ontario and Bend, Oregon. These meetings were attended by agencies, public officials, Project supporters, and non-governmental organizations (NGOs).

Division 37 mandates DOGAMI to manage and facilitate the regulatory permitting process. It requires that a series of public meetings are held, to be coordinated by DOGAMI or its contractor. This committee is charged with gathering comments from the public regarding Project specifics. DOGAMI acts as the facilitating State agency and State clearinghouse for the mine permitting process. It is the applicant's responsibility to secure other needed State permits such as air pollution control, storm water pollution prevention plan, and land use permits as may be required. However, the Division 37 process is designed to promote a consolidated permitting pathway.

DOGAMI coordinates with the other agencies to avoid duplication on the part of the applicants and related agency requests. The agency is also responsible for reviewing mine operating plans and issuing reclamation permits. It establishes reclamation bond amounts for the Project, working closely with Calico.

The basic information for a Division 37 application involves:

- Determining existing environmental baseline conditions;
- Providing an operating plan (mine plan and reclamation/closure plan);
- Providing an alternatives analysis;
- Providing an environmental evaluation;
- Providing a socio-economic impact analysis;
- Developing a plan to minimize pollution and erosion;
- Protecting fish and wildlife during operations and closure (fish and wildlife standards),
- Providing a water balance;
- Establishing financial assurance requirements;
- Inclusion of all other State, Federal, and local permit applications required under Division 37.

DOGAMI officials have indicated that the Division 37 timeline for this requirement can be expected to be about one year from the date that a "complete application" (as deemed complete by DOGAMI) is submitted for the regulatory process to be concluded, and a permit issued.

20.3.2 Federal Plan of Operations Processing

Currently, it is not contemplated that the Grassy Mountain Gold Mine will require either a Federal National Pollutant Discharge Elimination System Permit (NPDES) from the EPA or a US Army Corps of Engineers 404 Dredge and Fill Permit. The Project does not involve a discharge to Waters of the US. Neither does it involve construction in wetlands or placement of dredge tailings or fill material into Waters of the US. However, the Project does require a PoO approval from the BLM.

A PoO Application must be submitted to the BLM for any surface disturbance in excess of five acres. A PoO Application describes the operational procedures for the construction, operation, and closure of a project. The PoO Application must also include a waste rock management plan, quality assurance plan, a storm water plan, a spill prevention plan, reclamation plan, a monitoring plan, and an interim management plan. In addition, a reclamation report with a reclamation cost estimate (RCE) for project closure is required. The content of the PoO Application must be based on the mine plan design and the data gathered as part of the environmental baseline studies. The PoO Application must include all mine and processing design information and mining methods. The BLM determines the completeness of the PoO Application and, when the completeness letter is submitted to the proponent, the NEPA process begins. The RCE is reviewed and the bond is determined prior to the BLM issuing a decision record on a PoO Application.

Submittal of the Grassy Mountain PoO Application was in September 2017. A revised PoO was submitted to the BLM in February 2020. The BLM has requested additional details and Calico is working on acquiring the information and updating the PoO.

20.3.3 National Environmental Policy Act

The NEPA process is triggered by a Federal action. In this case, the issuance of a completeness letter for the PoO triggers the Federal action. The BLM has stated that the NEPA review process for this Project will be an environmental impact statement (EIS).

An EIS process is conducted in accordance with NEPA regulations (40 CFR 1500 et. seq.), BLM guidelines for implementing the NEPA in BLM Handbook H-1790-1 (updated January 2008), and BLM Washington Office Bulletin 94-310. The intent of the EIS is to assess the direct, indirect, residual, and cumulative effects of a project and to determine the significance of those effects. Scoping is conducted by the BLM and includes a determination of the environmental resources to be analyzed in the EIS, as well as the degree of analysis for each environmental resource. The scope of the cumulative analysis is also addressed during the scoping process. Following scoping and baseline information collection, a Draft EIS is prepared for the BLM by a third-party contractor. When the BLM determines the Draft EIS is complete, it is submitted to the public for review. Comments received from the public are incorporated into a Final EIS, which is in turn reviewed by the BLM and the public prior to a record of decision (ROD). Under an EIS there can be significant impacts. The project proponent pays for the third-party contractor to prepare the EIS, and also pays recovery costs to the BLM for any work on the Project by BLM specialists.

The BLM is requiring the preparation of an EIS for the Grassy Mountain Project to comply with the NEPA, which, under Secretarial Order 3355, has to be completed in 365 days (from the NOI publication in the Federal Register to the signing of the ROD) and must be less than 150 pages (unless a Department of Interior waiver is obtained, which then allows for 300 pages).

20.3.4 Malheur County Permit Processing

Malheur County requires the acquisition of a Conditional Use Permit (CUP) for the Private Land part of the Grassy Mountain Project. Calico obtained the CUP in May of 2019. Additionally, building permits from the Malheur County will also be required to address plumbing, electrical, and structural design.

20.4 Environmental Study Results and Known Issues

20.4.1 Baseline Studies

Calico has been conducting baseline data collection for nine years for environmental studies required to support the State and Federal permitting process. Results indicate limited biological and cultural issues, air quality impacts appear to be within State of Oregon standards, traffic and noise issues are present but at low levels, and socioeconomic impacts are positive. The result of the geochemical

characterization identified that the geochemistry of the ore and waste rock provide for a possible source of future environmental issues as the Grassy Mountain Project is developed.

The baseline studies submitted to and accepted by DOGAMI are:

- Surface water;
- Air quality;
- Aquatic;
- Geology and soils;
- Terrestrial vegetation;
- Wetlands;
- Transportation;
- Visual resources;
- Grazing management;
- Land use;
- Noise;
- Recreation;
- Socioeconomics;
- Environmental justice;
- Natural areas;
- Natural heritage areas;
- Wild and scenic rivers;
- Areas of critical environmental concern

The baseline studies that still require update and acceptance by DOGAMI are:

- Groundwater;
- Geochemistry;
- Cultural;
- Wildlife.

All baseline studies listed above have been submitted to the BLM. The BLM has requested additional information on all except Land Use and Wetlands. All except four have been resubmitted to the BLM; however, at the Report effective date Calico had not received a response from BLM. Some of the baseline studies are not specifically required by the BLM but were submitted to the BLM, because they are a part of the TRT and thus will review all documentation required by DOGAMI.

20.4.2 Geochemical Characterization and Groundwater Studies

The geochemical characterization and groundwater studies are ongoing. They are interrelated studies with both focusing predicting the potential for acid rock drainage on the surface and in groundwater.

SRK Consulting U.S., Inc. (SRK) completed a baseline geochemical characterization study for the Grassy Mountain Project. The purpose of the baseline geochemical characterization program was to

provide a prediction of the potential geochemical reactivity and chemical stability of mine waste that will be produced by the Grassy Mountain Project. The results of the geochemical characterization program assisted in determining the potential for acid rock drainage (ARD) and metal leaching (ML) associated with the Grassy Mountain Project. Data produced during this study were used in the Grassy design process and as an operational tool for identifying material types that require special handling during operations. As outlined in Section 18 of the Report, the design of the TSF and the waste rock management plan used the results of this geochemical characterization work.

The characterization work undertaken for the Grassy Mountain Project meets the following regulatory requirements:

- Oregon Department of Geology and Mineral Industries (DOGAMI) Division 37 Chemical Process Mining, Oregon Administrative Rule (OAR) 623-037-0055 and OAR 632-037-0085(Environmental Evaluation);
- Applicable Oregon Department of Environmental Quality (ODEQ) Division 43 Chemical Mining Rules, OAR 340-043, which address process mining.

In addition, the geochemical characterization program was designed to follow guidelines set forth in the Bureau of Land Management Instruction Memorandum NV-2013-046, Nevada Bureau of Land Management Rock Characterization Resources and Water Analysis Guidance for Mining Activities (BLM, 2013).

The Grassy Mountain Project waste rock shows variable geochemical behavior and each material type has a wide range of sulfide content and predicted acid generation from the static test results. Overall, the waste rock has very limited acid neutralizing capacity due to the low inorganic carbon content and as such the predicted acid generating potential is strongly related to sulfide content. The characterization results for the ore grade material are comparable to the waste rock material.

Based on the acid–base accounting (ABA) and net-acid generating (NAG) results, six out of the 104 waste rock and ore samples contain greater than 0.5% sulfide sulfur indicating a higher potential for acid generation. The remaining samples have an uncertain potential for acid generation with NNP values between -20 and 20 kg CaCO₃ eq/ton. The NAG results are consistent with the ABA data and show samples with sulfide sulfur greater than 0.5 wt% are predicted to have a higher capacity for acid generation with NAG values greater than 20 kg H₂SO₄ eq/ton. Samples with sulfide sulfur content between 0.05 and 0.5 wt% show a low to moderate potential for acid generation with NAG values between 1 and 20 kg H₂SO₄ eq/ton.

Based on a meteoric water mobility procedure test, the majority of the samples have neutral to alkaline paste pH values (pH 6–8), indicating minimal readily-soluble acid sulfate salts from prior oxidation of the core material. The exceptions are a few samples of mudstone and siltstone with the highest sulfide sulfur content that generated acidic leachate. Constituents above Oregon groundwater quality guidelines under the low pH conditions include sulfate, arsenic, cadmium, chromium, copper, fluoride, iron, manganese, selenium and zinc. For samples with neutral pH (i.e., pH >7) all constituents were below the Oregon groundwater quality guidelines.

Eight of the 10 humidity cell tests generated acidic leachate throughout the test and indicate that samples with an uncertain potential for acid generation from the ABA will generate acid under long term weathering conditions. The only two samples that maintained neutral conditions during the humidity cell test program consisted of sinter material. All other material types are considered to be acid generating including the sandstone, siltstone and mudstone. A comparison of the HCT leachate chemistry to Oregon groundwater quality guidelines indicates the mudstone (HC-3 and HC-4) had the greatest number of parameters that exceeded guidelines and the sinter cells (HC-8 and HC-9) had the least. Most cells that developed acidic conditions leached copper, iron, manganese, arsenic and sulfate at concentrations greater than the guidelines, indicating these elements are mobile under acidic pH conditions. Other constituents that were leached above Oregon groundwater quality guidelines

during the first few weeks of the test include cadmium, chromium, copper, fluoride, lead, selenium, silver and zinc.

20.5 Waste Disposal, Monitoring, Water Management

Waste rock characterization has been conducted and results indicate that the waste rock and ore are generally reactive, acid generating, and have the potential to leach metals (refer to Section 20.4). As a result, waste rock and tailings management are expected to be key issues in the permitting of the mining operation.

20.6 Social and Community Issues

Social and community impacts have been and are being considered and evaluated for the various PoO amendments performed for the Project in accordance with the NEPA and other Federal laws, and the State of Oregon Socioeconomic Analysis. Potentially affected Native American tribes, tribal organizations and/or individuals are consulted during the preparation of all PoO amendments to advise on the proposed projects that may have an effect on cultural sites, resources, and traditional activities.

The most recent planning by Malheur County, Oregon, were considered during the preparation of PoO amendments. Potential community impacts to existing population and demographics, income, employment, economy, public finance, housing, community facilities and community services will be evaluated for potential impacts as part of the State of Oregon and the NEPA process.

There are no known social or community issues that would have a material impact on the Project's ability to extract Mineral Resources and Mineral Reserves. Identified socioeconomic issues (employment, payroll, services and supply purchases, and State and local tax payments) are anticipated to be positive.

20.7 Closure

A closure plan and RCE were submitted to both the BLM and DOGAMI as part of the Consolidated Permit Application and PoO Application, respectively. DOGAMI indicated that additional information is needed for the RCE and the BLM has not completed their final review of the RCE. The bond estimate included in the costs for the 2020 FS is approximately \$6.3 million.

The anticipated closure scenario for the Project would be to plug the mine portal, and for the TSF closure the approach would consist of fluid management through evaporation, cover material, a synthetic liner and growth media, and then revegetating. The process of managing the solutions from the tailings draindown would require multiple years. Residual tailings drainage would likely be managed with evaporation cells until the drainage stops. The WRSF would be moved to the TSF. Other facilities would be regraded, covered with growth media and revegetated. The closure scenario for the tailings would likely result in conditions that require long-term management of the evaporation cells and associated ancillary facilities at the site until the drainage stops, which will require a financial instrument to cover those costs into the future.

20.8 Environmental and Permitting Risks and Opportunities

As with almost all mining projects, there are inherent risks and opportunities related to the final outcome of the Project. Most of these risks related to environmental and permitting are based on uncertainty of the permitting program, and timing to obtain all necessary permits and authorizations. Other risks can involve new regulations, tightening of standards like air or water quality, and legal challenges.

To facilitate Project permitting and development for the 2020 FS and permitting programs, and to design a sustainable project and reduce environmental risks, Calico has adopted the following environmental principles for the Project:

- Protect local surface and ground water quality and quantity by applying Best Management Practices and water treatment, as necessary;
- Confirm the presence of potential threatened and endangered or sensitive amphibians, wildlife, or plant species at the site;
- Effectively manage all related mine waste including lining the tailings storage facility, use of tailings and waste rock underground as backfill, and segregation and selective handling of waste rock as necessary;
- Reduce the carbon footprint for the Project by processing the gold concentrate on site;
- Conduct environmental monitoring to ensure compliance with all applicable State, Federal, and local laws, regulations, and ordinances;
- Transport all fuel to the mining operation according to accepted transport and spill prevention and response standard operating procedures developed specifically for the Project;
- Integrate pro-active wildlife habitat mitigation and enhancement proposals with an environmentally responsible reclamation and closure plan;
- Provide adequate financial assurance for implementing an effective reclamation and closure plan to ensure long-term protection and rehabilitation of the mine site;
- Implement a responsible community and statewide public affairs program to further open communications, maximize local job opportunities and involvement, and meet environmental justice requirements for the Grassy Mountain Mine Project.

Collectively, these objectives or environmental principles will guide Project development. They will also serve to reduce risk and enhance related Project opportunities.

21 CAPITAL AND OPERATING COSTS

21.1 Capital Cost Estimate

21.1.1 Introduction

The objective of the Grassy Mountain Project was to develop a capital cost estimate with an accuracy of ±15% using the AACE Class 3 estimate standards. The estimate includes the cost to complete the design, procurement, construction and commissioning of all the identified facilities.

The entities involved in the estimate, and their areas of input are summarized in Table 21-1.

Table 21-1: Capital Cost Estimate Input Areas

Company Responsible	Area	Item
Ausenco	Site development & earthworks	Internal roads Catchment pond Diversion ditches from process plant to pond Crusher rom pad Plant site bulk earthworks On-site infrastructure bulk earthworks
	Crushing & material handling	Primary crushing Secondary crushing Fine ore bin
	Process plant	Grinding and classification Carbon-in-leach Cyanide detox Carbon elution and goldroom Tailings filtration Reagents Process utilities (Process plant building, water systems, plant & instrument air, process control system)
	Tailings management & waste rock	Tailings & reclaim pipelines
	On-site infrastructure & utilities	Power distribution (power distribution & supply, electrical rooms, control rooms) Water supply & distribution Waste management (water treatment plant (grey water)) Ancillary buildings (mine dry & office, mine maintenance/warehouse, underground truck shop, plant maintenance/warehouse, assay laboratory)

Company Responsible	Area	Item
		Surface mobile equipment (surface mobile equipment & facilities) Bulk fuel storage & distribution Information technology and communications
MDA	Mining pre-stripping	Portal construction Portal laydown
	Mine development	Decline Level station Level access Underground sump Underground stockpiles Underground power stations Underground truck loading bays Ventilation infrastructure (ventilation bays, raises)
	Underground mine equipment	
	Mine infrastructure & services	Main fans and housing Auxiliary fans
	Mine dewatering	Face pumps Sump pumps
	Paste plant	
	Haul roads	Portal to WRSF Ventilation laydown Powder magazine Borrow pit road
Golder	Tailings facility & water management Reclamation & closure	Construction material quantity estimate only
HDR Engineering Inc (HDR)	Main access roads	
SPF Water Engineering (SPF)	Water distribution	
Fire Safety Systems Ltd (FSS)	Fire suppression, detection and protection systems	
Idaho Power	Powerlines	
Paramount	Owner's costs	

21.1.2 Project Execution

The estimate was based on the traditional engineering, procurement and construction management (EPCM) approach where the EPCM contractor will oversee the delivery of the completed project from detailed engineering and procurement to handover of working facility. The EPCM contractor shall engage and coordinate several subcontractors to complete all work within the given scopes.

21.1.3 Estimate Summary

The estimate was derived from a number of fundamental assumptions as indicated in process flow diagrams, general arrangements, mechanical equipment list, electrical equipment list, material take offs (MTOs), cable schedules, scope definition and a work breakdown structure. The estimate included all associated infrastructure as defined by the scope of work.

The capital cost estimate is summarized in Table 21-2 and Table 21-3. The estimate has a base date of Q1 2020 with no provision for forward escalation and noted in US dollars unless stated otherwise.

Table 21-2: Initial Capital Cost Estimate Summary (direct and indirect)

Cost Type	Description	US\$ M
Direct	Mine	10.7
	Site development	4.0
	Mineral processing	23.4
	Tailings management & waste rock facility	6.0
	On-site infrastructure	12.2
	Off-site infrastructure	9.1
	<i>Direct Subtotal</i>	<i>65.4</i>
Indirect	Indirects	14.3
	Provision (contingency)	10.1
	Owners Costs	7.7
	<i>Indirect Subtotal</i>	<i>32.1</i>
<i>Project Total – Initial Capital</i>		<i>97.5</i>

Table 21-3: Initial Capital Cost Estimate by Major Area

Cost Type	Description	US\$ M
Direct	Architectural	5.8
	Earthworks	4.3
	Concrete	3.0
	Structural steel	1.6
	Platework	2.8
	Mechanical equipment	10.6
	Piping	2.4
	Insulation & coatings	0
	Electrical equipment	4.2
	Electrical bulks	1.3
	Instrumentation	0.4
	Mobile equipment	1.2
	Third party estimates	27.9
	<i>Direct Subtotal</i>	<i>65.4</i>
Indirect	Owners costs & bonding	7.7
	Project delivery (EPCM)	9.7

Cost Type	Description	US\$ M
	Field indirects	2.9
	Spares & first fills	1.8
	Provisions (contingency)	10.1
	<i>Indirect Subtotal</i>	<i>32.1</i>
Project Total – Initial Capital		97.5

21.1.4 Sustaining Capital Cost Estimate

The sustaining capital cost estimate is provided in Table 21-4.

Table 21-4: Initial Sustaining Capital Cost Estimate Summary (direct and indirect)

Cost Type	Description	US\$ M
Direct	Mine	15.0
	Site development	0
	Mineral processing	0.3
	Tailings management & waste rock facility	12.2
	On-site infrastructure	0.7
	Off-site infrastructure	0.4
	<i>Direct Subtotal</i>	<i>28.5</i>
Indirect	Indirects	0.6
	Provision (contingency)	2.0
	Owners costs (bond payback)	(5.6)
	<i>Indirect Subtotal</i>	<i>(3.0)</i>
Project Total – Sustaining Capital		25.6

21.1.5 Definition of Costs

The initial capital cost estimate was broken out into direct and indirect costs:

- Initial capital is the capital expenditure required to start up a business to a standard where it is ready for initial production;
- Sustaining capital is the capital cost associated with the periodic addition of new plant, equipment or services that are required to maintain production and operations at their existing levels, or a TSF expansion;
- Direct costs are those costs that pertain to the permanent equipment, materials and labor associated with the physical construction of the process facility, infrastructure, utilities, buildings, etc. Contractor’s indirect costs were contained within each discipline’s all-in rates;
- Indirect costs include all costs associated with implementation of the plant and incurred by the Owner, engineer or consultants in the project design, procurement, construction, and commissioning.

21.1.6 Methodology

The estimate was developed based on a mix of detailed material take-offs and factored quantities and costs, detailed unit costs supported by contractor bids and budgetary quotations for major equipment supply.

The structure of the estimate was a build-up of the direct and indirect cost of the current quantities; this included the installation/construction hours, unit labor rates and contractor distributable costs, bulk and miscellaneous material and equipment costs, any subcontractor costs, freight and growth.

21.1.7 Exchange Rates

The exchange rates used were determined from the XE.com website as at February 20, 2020 and were applied to foreign currency data. The exchange rates in Table 21-5 were used.

Table 21-5: Exchange Rates

Forex Rate	US\$
1.000 CAD	0.750
1.000 EUR	1.080
1.000 AUD	0.662

Note: AUD = Australian dollar, EUR = Euro, CAD = Canadian dollar.

21.1.8 Market Availability

The pricing and delivery information for quoted equipment, material and services was provided by suppliers based on the market conditions and expectations applicable at the time of estimate development.

Market conditions are susceptible to the impact of demand and availability at the time of purchase and could result in variations in the supply conditions. The estimate in this report is based on information provided by suppliers and assumes there are no problems associated with the supply and availability of equipment and services during the execution phase.

21.1.9 Mining Capital Cost Estimate

21.1.9.1 Underground Capital Costs

The underground capital costs were estimated using quotes and InfoMine cost estimates. The underground capital costs are listed in Table 21-6.

Table 21-6: Underground Capital Costs

Equipment	Model	Quantity	Quote or Estimate	Buy or Lease	Total Cost
Dual	Resemin Troidon 88 Dual	3	Quote	Lease	2,148,000
Van man-transport	Ford Van	3	Quote	Lease	147,000
LHD 5.2 cubic yards	CAT R1600	4	Quote	Lease	3,232,000
Front-end loader (share with surface & underground)	CAT 962H	1	Quote	Buy	455,000

Equipment	Model	Quantity	Quote or Estimate	Buy or Lease	Total Cost
Truck with ejector bed	CAT AD22	3	Quote	Lease	2,274,000
Emulsion loader	CAT 440	1	Quote	Lease	300,000
Telehandler	JCB 540-170	2	Quote	Lease	176,000
Dozer (share with surface & underground)	CAT D6T	1	Quote	Buy	278,000
Motor grader	Paus PG5HA	1	Quote	Lease	478,000
4wd twin cab utility	Light Vehicle 4WD Twin Cab Utility 1/2 ton	1	Quote	Lease	41,000
Mine rescue truck	Light Vehicle 4WD Twin Cab Utility 1/2 ton	1	Quote	Lease	41,000
Diamond drilling	Hydracore Gopher	1	Estimate	Buy	69,000
Shotcrete sprayer	Normet Spraymec 8100 VC	1	Estimate	Lease	603,000
Shotcrete truck	Normet Utimec SF 300	1	Quote	Lease	528,000
Lube truck	Normet Multimec MF 100	1	Quote	Lease	563,000
Water truck	Normet Multimec MF 100	1	Quote	Lease	654,000
Main fan	5400-VAX-2700 Fans	1	Quote	Buy	830,000
Auxiliary fans	3800-VAX-2100 50HP	5	Quote	Buy	182,000
Auxiliary pumps	Peak TD350HH	5	Quote	Buy	114,000
Face pump	TD250HH 13HP	5	Quote	Buy	51,000
Initial supplies & inventory	Powder, bolts, pipe, inventory	1	Estimate	Buy	150,000
Mobile load center (electrical)		3	Quote	Buy	335,000
Jumbo boxes		6	Quote	Buy	92,000
Portal preparation		1	Quote	Buy	280,000
Compressed air		4	Quote	Buy	40,000
Spare parts - main fan		1	Quote	Buy	830,000
Spare parts - fans, MLC, jumbobox, compressor		1	Quote	Buy	204,000
Spare parts - pumps		1	Quote	Buy	66,000
Backfill plant	Master Plant - Eagle 4000	1	Quote	Buy	499,000
Control room	Insulated single block cabin	1	Quote	Buy	12,000
Housing insulation	Insulation and heating for pipes	1	Quote	Buy	2,000
Housing lights	Internal plant lighting system	1	Quote	Buy	10,000

Equipment	Model	Quantity	Quote or Estimate	Buy or Lease	Total Cost
Mixer	Superwash	1	Quote	Buy	28,000
Contingency		NA	NA	NA	1,300,000
Total					17,012,000

The capital costs are categorized into buy or lease. The items that are categorized as lease will be leased to own and a portion of the costs are initial capital and the remaining portion are sustaining capital. The summary for leasing by year is shown in Table 21-7.

Table 21-7: Leasing Costs

Item	Unit	Year -1	Year 1	Year 2	Year 3	Year 4	Year 5	Year 6	Year 7	Year 8	Total
Down payment	x 1,000 \$US	1,471	1,314	—	—		—	—	—	—	2,785
Principal payment	x 1,000 \$US	572	2,564	2,827	2,318	120	—	—	—	—	8,400
Net capital	x 1,000 \$US	2,043	3,877	2,827	2,318	120	—	—	—	—	11,185
Interest payment	x 1,000 \$US	105	382	238	71	1	—	—	—	—	797
Total payments	x 1,000 \$US	2,148	4,259	3,066	2,389	120	—	—	—	—	11,982

21.1.9.2 Underground Labor

Underground personnel requirements for the LOM are summarized in Table 21-8 and include staff for underground operation, underground maintenance, and underground technical services.


Table 21-8: Underground Mine Personnel

Position	Quantity
Mine engineer	1
Mine surveyor	1
Mine geologist	1
Mine superintendent	1
Mine clerk	1
Mine foreman	4
Underground miner	28
Underground laborer	22
Mine electricians	1
Mine maintenance superintendent	1
Heavy equipment elec-mechanic	10
Welder	2
Serviceman	2
Maintenance laborer	2
Light vehicle mechanic	1

Position	Quantity
Total underground personnel	78

The quantities shown in Table 21-8 do not include milling process personnel nor site management. The total underground mine personnel required will be 78 workers. The shift system for administrative personnel is planned to be four days on and three days off, at 10 hours per day. Production-related mining personnel (operators, fitters, electricians, and assistants) will work a shift system of four days on and three days off in two crews. Each crew will provide 12 hours per day coverage so that the mine can operate for a 24 hour/day, four days per week. Some personnel may work additional overtime through weekends for backfill, dewatering, and care-and-maintenance requirements, as needed. The operating calendar is based on 360 operating days per year. The planned mine organization chart is shown in Figure 21-1.

Figure 21-1: Proposed Mine Organizational Chart

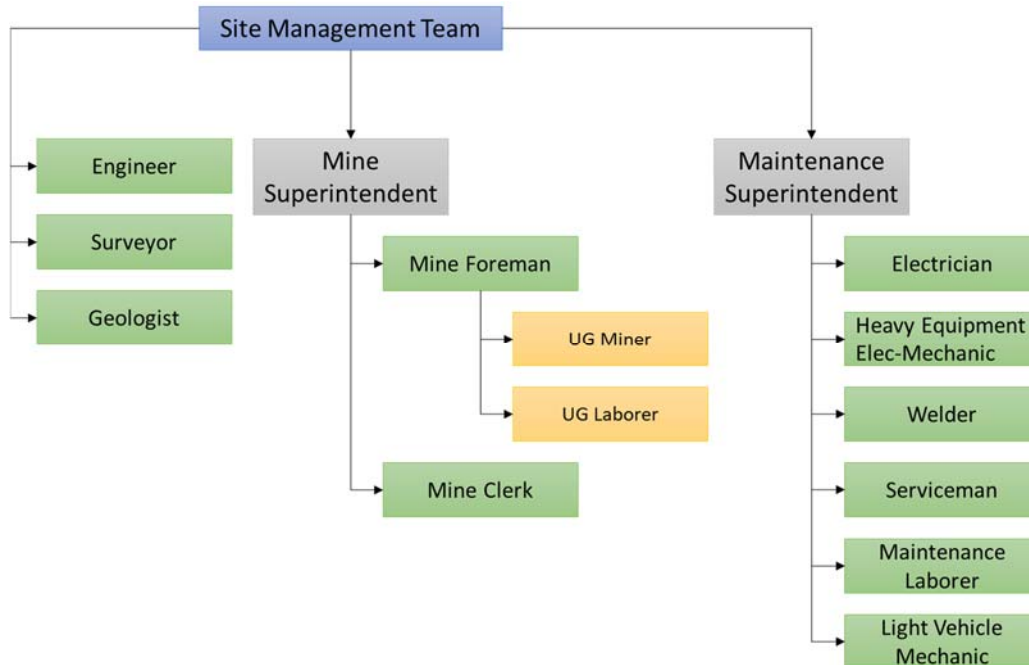

Note: Figure prepared by MDA, 2020.

21.1.9.3 Initial Mining Cost Summary

Mining costs are summarized in Table 21-9.

Table 21-9: Initial Mining Capital Cost Estimate Summary (direct and indirect)

Cost Type	Description	US\$ M
Direct	Mine pre-strip	0.3
	Mine development/production	4.3
	Mine fixed equipment	0.8
	Mine infrastructure and services	0.2
	Mine fleet	3.0
	Mine dewatering	0.1

Cost Type	Description	US\$ M
	Mine pre-production costs	0.2
	Paste plant	0.8
	<i>Direct Subtotal</i>	9.6
Indirect	Indirects	0
	Provision (contingency)	1.3
	Owners costs	0
	<i>Indirect Subtotal</i>	1.3
<i>Project Total – Initial Mining Capital</i>		10.9

21.1.10 Processing and Overall Site Infrastructure Capital Cost Estimate

21.1.10.1 Direct Costs

Direct costs are generally quantity based and include all permanent equipment and materials associated with the physical construction of the facility. Cost estimates include:

- Direct man-hours and labor;
- Contractor distributables;
- Construction equipment;
- Job materials (consumables);
- Permanent equipment and bulk materials;
- Freight and subcontracts.

The process capital cost estimate is provided in Table 21-10.

Table 21-10: Initial Process Capital Cost Estimate Summary (direct and indirect)

Cost Type	Description	US\$ M
Direct	Mine infrastructure & services	1.0
	Bulk earthworks	1.5
	Roads	1.6
	Surface water management	1.0
	Crushing & ore handling	3.5
	Grinding	2.7
	Trash screen	0.2
	CIL	4.3
	Carbon elution and goldroom	3.1
	Cyanide detox	2.2
	Tailings thickening	0.2
	Reagents	1.3
	Plant building services	4.7
	Tailings facility & water management	0.1
	Tailings & reclaim pipelines	0.3
	Power generation & distribution	0.7
	Water supply & distribution	4.3
	Ancillary buildings	5.3
	Surface mobile equipment	1.2
	Bulk fuel storage & distribution	0.2
	Information technology and communications	0.2
	General	0.2
	External/main access road	4.7
Overhead power line	4.4	
<i>Direct Subtotal</i>	<i>50.3</i>	
Indirect	Indirects	14.0
	Provision (contingency)	7.9
	Owners costs	0
	<i>Indirect Subtotal</i>	<i>21.9</i>
Project Total – Initial Process & On-Site Infrastructure Capital		72.2

21.1.10.2 Direct Man-Hours

Direct site man-hours are summarized in Table 21-11.

Table 21-11: Direct Man-Hours by Discipline

Description	Manhours
Earthworks	18,498
Concrete	13,787
Architectural	9,101
Structural steel	5,011
Platework	5,241
Mechanical equipment	11,448
Piping & fittings	10,650
Electrical equipment	3,770
Electrical bulks	5,818
Instrumentation	828
Third party – FSS	2,532
Third party – MDA	n/a
Third party – Golder	n/a
Third party – HDR	n/a
Third party – Idaho Power	n/a
Total Direct Hours	86,684

21.1.10.3 Labor Productivity

Productivity factors were used to capture the productivity loss due to conditions experienced in the Project area.

Site productivity was assessed for each discipline using the scorecard method. Unit-man hours were multiplied by the productivity factors for total manhours per line item. Total manhours were then compared against returned contractor bids to ensure sufficient manhours were carried in the estimate.

21.1.10.4 Contractor Labor Rates

The contractor labor wages carried in the estimate were calculated from first principles from a project recently completed by Ausenco in Washington State. The rates were checked against historical data for labor in Oregon and Idaho. The labor rates reflect the use of local labor and surrounding regional workforces. The rates are fully burdened.

21.1.10.5 Contractor Distributable Costs

Percentages were added to the base labor rate for concrete, structural, mechanical, piping, electrical and instrumentation. Earthworks were based on sub-contractor rates. Distributable costs were allocated by percentage per discipline based on Ausenco’s in-house database, and confirmed by back calculating contractor indirect costs from the returned bids.

21.1.10.6 Earthworks & Site Preparation

It was assumed that items such as engineered fill will be sourced from borrow pits and stockpiles on site. MTOs were taken from an Autodesk Civil 3D model of the plant layout and general arrangements.

Sub-contract rates were used in the estimate for bulk earthworks requirements. Prices carried in the estimate were a combination of rates from local contractors and Ausenco's in-house database for confirmation.

21.1.10.7 Concrete Supply & Installation

The scope of the concrete works allows for all concrete work in the process plant and relevant on-site facilities. MTOs were prepared by engineering and are based on calculations derived from a 3D layout model, general arrangement drawings and sketches.

The basis for the development of installed concrete was the product of concrete material supply and installation costs. Labor costs included the necessary consumables, reinforcement bar, and formwork. Supply of ready-mix concrete costs were sourced from contractors in the area for current pricing. The overall unit rates were comparable to those in Ausenco's in-house database for projects in Oregon and Idaho.

The cost of an on-site batch plant was excluded from the estimate as the mine site is located within driving distance to Vale and Boise. Both cities have existing ready-mix plants.

21.1.10.8 Structural Steel

Structural steel quantities were prepared by engineering based on calculations derived from a 3D layout model, general arrangement drawings and sketches.

The basis for the development of installed structural steel was the product of steel material supply and installation costs. Labor man-hours were based on local contractors for the installation of the necessary structural sections and all associated items such as stair treads, hand railing and grating with adjustments by Ausenco for productivity.

Pricing was sourced from fabricators in Idaho, Montana and Arizona and allowed for the supply, fabrication, shop detailing and painting of bulk steel products graded as light, medium, heavy and extra heavy structural steel designations, and miscellaneous steel including checker plate, grating and handrail.

The structural, mechanical and piping (SMP) contractor will be free-issued the steel for assembly on site.

21.1.10.9 Architectural

A buildings list was developed from general arrangement drawings and historical data of similar facilities. Concrete and internal support steel for equipment inside the buildings were accounted for in the engineer's MTOs.

Pricing for the supply and installation of the building packages was from current quotations and Ausenco's in-house database from recent relevant projects. Allowances were carried in the estimate for furniture, fittings and fixtures. Overhead cranes were not included in the building costs as they were accounted for in the mechanical equipment list.

21.1.10.10 Mechanical Equipment

A detailed mechanical equipment list was developed, generally sized by process and mechanical engineering, and emphasized the selection of proven designs. Quantities were based on process flow diagrams, equipment list, equipment datasheets and general arrangement plans. Mechanical equipment was included in the capital cost estimate in accordance with the latest revision of the equipment list.

Pricing for major process mechanical equipment items was based on budget quotations. Other minor equipment costs were from Ausenco's in-house database and recent studies or estimated by engineering.

21.1.10.11 Platework

A platework list was prepared for chute work, launders, hoppers, bins and major field erected tanks and silos, this list makes up part of the mechanical equipment list. Platework and liners were quantified in short tons or square feet by engineering. Tanks were designed as panel-style bolted and welded construction. Mechanical bulks quantities were prepared by engineering based on design calculations, previous similar designs, and forced quantity factors. Some minor structures were developed from drawings and sketches.

The basis for the development of installed platework steel was the product of steel material supply and installation costs. Labor man-hours were based on local contractors in the region for the installation of the bulk steel plate and rubber or carbon steel lining products with adjustments by Ausenco for productivity.

Pricing was sourced from fabricators in Idaho, Montana and Arizona and allows for the supply, fabrication, shop detailing of platework elements.

Rubber and carbon steel lining products were costed using historical data. Installation hours of rubber liners have been based on increments of 6 mm thickness. Installation hours of carbon steel liners were based on increments of 16 mm thickness. Tanks identified and designed as panel-style bolted tanks were quoted as supply and install.

The SMP contractor will be free-issued the platework bulk steel for assembly on site.

21.1.10.12 Process Plant Piping

The process plant piping was factored from the total installed mechanical. The factor allowed for pipe, fittings, supports, valves, paint, special pipe items and flanges. The piping bulks will be free-issued to the SMP contractor for installation.

21.1.10.13 Fire Protection and Detection Piping

Fire protection and detection piping was included in the estimate based on a vendor quotation from FSS. The quote allowed for the supply and installation of fire protection/detection equipment, pipes, fittings, supports, valves, special pipe items, and flanges.

21.1.10.14 Water Supply and Distribution

Potable water, fresh water, raw water pipeline, wells and septic water supply and distribution piping were included in the estimate based on a vendor quotation from SPF. The estimate included supply rates for pipe and fittings, civil works and mechanical equipment.

21.1.10.15 Pipelines

Ausenco's scope included the installation of the decant line and tailings distribution lines. The supply rates included pipe and fittings with standard install hours applied to the labor rate. The tailings pipelines will be free-issued to the SMP contractor for installation.

21.1.10.16 Electrical Equipment

The proposed electrical equipment list aligns with the current mechanical equipment list and load list.

Pricing for major electrical equipment items was developed from a combination of budget quotations and Ausenco's in-house database.

A 15 kV overhead powerline was included to feed the process plant, ancillary buildings, and tailings area. The powerline will have a total length of 5,290 ft and will branch off the main powerline from the mine site.

21.1.10.17 Electrical Bulks

An electrical cable schedule was developed for the Project covering the major power and control cables between electrical equipment (transformers and switchgears/motor control centers or MCCs) and between MCCs and motors. Based on the layout and e-room placement, MTOs for high voltage cables were developed via manual take-offs for major lines and an average length per area was established for medium voltage cables.

Cable trays were estimated via manual take-offs for 6–36-inch trays together with allowances for cable tray covers. While not all cables would travel the full length of the longest tray run, any over-supply is expected to cover costs for risers, bends, covers, fittings and fixtures.

An allowance for terminations, small lighting, and receptacles was developed by factoring from the mechanical equipment supply costs.

21.1.10.18 Instrumentation and Control

Instrumentation was developed by factoring from the mechanical equipment supply costs. The process control system for the process plant was priced separately.

21.1.10.19 Mobile Equipment

Equipment prices included price ex-factory, freight and erection at site if required.

The major equipment fleet for support to the completion of the site development and bulk earthworks was built-up into the earthworks unit rates. Surface mobile equipment to support the construction of the process plant and on-site infrastructure was included in the all-in labor rate provided by the contractors.

21.1.10.20 Freight Costs

Freight costs included inland transportation, export packing, all forwarder costs, ocean freight and air freight where required, insurance, receiving port custom agent fees, and local inland freight to the planned mine site for all bulk materials and process plant equipment.

The estimate freight costs were determined by applying a percentage to the applicable items direct supply cost and then including this cost as a separate value on each line items build-up. Vendor-supplied freight costs were included for major equipment where available.

Vendor packages, third-party costs and any other subcontract and design and construct items were inclusive of any required freight to site.

21.1.10.21 Import Duties

Import duties were excluded from the estimate.

21.1.11 Tailings Storage and Waste Rock Dump Facilities Capital Cost Estimate

21.1.11.1 Material Take-off and Bid Solicitation

As discussed in Section 18.5 and presented in Table 18-1, the TSF is designed to be constructed in a total of three primary construction stages (Stages 1 through 3). Stage 1 is separated into two intermediate construction phases (Stages 1A and Stage 1B). For the 2020 FS, Stage 1A is initial capital and Stage 1B and Stage 2 are sustaining capital. Stage 3 is not required for the 2020 FS mine production.

Stage 1A will be the initial stage of construction and provides the basic infrastructure to be able to operate the TSF and WRSF, including underdrains, embankments, stormwater diversion channels, and a TSF reclaim pond. Stage 1B and Stage 2 will include construction of embankment raises and TSF basin expansions to provide additional tailings storage.

The TSF design, as presented in Section 18.5 is of sufficient detail that construction quantity estimates for major earthwork, geosynthetics, and gravity piping are to an accuracy of 10%. Construction quantities estimates were developed by Golder using Autodesk Civil 3D designs of the TSF and WRSF facilities and general arrangements and design details.

Upon Golder receiving and compiling all quotations, the quotations were provided to Paramount and Ausenco for inclusion in the financial cost model prepared by Ausenco. Golder did not select a preferred general contractor for use in the 2020 FS financial model.

21.1.11.2 Cost Estimate

Ausenco and Paramount used the contractor bids obtained by Golder to create a construction cost estimates for Stage 1A, Stage 1B, and Stage 2 to develop the initial and sustaining cost estimates considering the timing required for construction of the TSF expansions as required by the 2020 FS mine life. Table 21-12 presents the initial capital cost applied for Stage 1A of the TSF in the economic analysis in Section 22.

Table 21-12: Initial TSF Capital Cost Estimate Summary (direct and indirect)

Cost Type	Description	US\$ M
Direct	Tailings Facility & Water Management	5.6
	<i>Direct Subtotal</i>	5.6
Indirect	Indirects	0.3
	Provision (Contingency)	0.9
	Owners Costs	0
	<i>Indirect Subtotal</i>	1.2
<i>Project Total – Initial Tailings Capital</i>		6.7

21.1.12 Indirect Capital Cost Estimate

21.1.12.1 Project Preliminaries (field indirects)

Project preliminaries are items or services which are not directly attributable to the construction of specific physical facilities of plant or associated infrastructure but required to be provided as support during the construction period.

These costs may include:

- Temporary construction facilities: site offices, induction center, first aid facilities, admin, portable toilets, temporary fencing, temporary roads and parking;
- Temporary utilities: power supply, temporary grounding and generators, construction lighting, and water supply;
- Construction support: site clean-up and waste disposal, material handling, maintenance of buildings and roads, testing and training, service labor, site transport, site surveys, QA/QC, and security;
- Construction equipment, tools and supplies purchased by the owner or EPCM contractor: heavy equipment and cranes, large tools, consumables, scaffolding and purchased utilities;
- Material transportation and storage incurred by the Owner or EPCM contractor: all types of freight, agents, staging and marshalling;
- Site office: local services and expenses, communications and office furniture.

Project preliminaries were developed from first principles and summarized in the estimate to cover the construction duration for the process plant and on-site infrastructure. MDA, Golder, FSS, and SPF accounted for field indirect costs in their discipline areas to support their scope of work.

21.1.12.2 Operational Spares

Mechanical and electrical spares for operations purposes were provided by vendor quotes for major equipment for the initial first year of operations. The remaining equipment was factored using Ausenco's in-house database.

21.1.12.3 Capital (Insurance) and Commissioning Spares

Major mechanical and electrical spares for capital/insurance and commissioning purposes were provided by vendor quotes for major equipment. The remaining equipment was factored using Ausenco's in-house database.

21.1.12.4 First Fills

First fills include the costs for the initial construction first fills for installed equipment and process first fills. First fills were developed by process engineering and separated in the estimate as either construction or commissioning first-fills.

21.1.12.5 Vendors

Costs for vendor representatives for commissioning were identified from the returned budget quotes as a cost per day or an allowance made by engineering. Costs were separated in the estimate as either construction or commissioning vendor representatives.

21.1.12.6 Pre-commissioning, Commissioning

Commissioning assistance from mechanical completion to hand over was developed using Ausenco's EPCM costs. A modification squad was allowed for in the estimate. The modification squad was carried to allow the commissioning team to make minor modifications or provide labor assistance for commissioning. The modification squad allowance has been estimated using Ausenco's in-house database.

21.1.12.7 Construction Camp and Catering

No onsite camp was allowed for in the estimate. It was assumed that all labor would be sourced from within the region and would reside in either Vale or Boise.

21.1.12.8 EPCM

EPCM services costs covered such items as engineering and procurement services (home office based), construction management services (site based), project office facilities, information technology, staff transfer expenses, secondary consultants, field inspection and expediting, corporate overhead and fees.

The overall EPCM budget for Ausenco’s scope of work was developed from first principles and was inclusive of allocations for other direct costs and general expenses.

21.1.13 Owners Costs

The Owner’s initial capital cost estimate is provided in Table 21-13.

Table 21-13: Initial Owner’s Cost Estimate Summary

Description	US\$ M
Corporate overheads	0.01
Environmental monitoring	0.2
Site office	0.6
Setup & running costs	0.3
Staff & labor	1.3
Bonding	5.3
Project Total – Initial Owners Capital	7.7

21.1.14 Contingency

21.1.14.1 Estimate Contingency

Estimate contingency was included to address anticipated variances between the specific items contained in the estimate and the final actual project cost.

The estimate contingency does not allow for the following:

- Abnormal weather conditions;
- Changes to market conditions affecting the cost of labor or materials;
- Changes of scope within the general production and operating parameters;
- Effects of industrial disputes.

21.1.14.2 Contingency Analysis

A cost risk analysis ranging workshop was held to develop the contingency value. The estimate was summarized by major discipline such as concrete, steel, contractor labor, mechanical equipment, etc. Through experience, judgement, discussion and reviews the relevant stakeholders attending the workshop evaluated the major cost components in terms of confidence of pricing and quantity basis and provided input ranges for potential underrun/overrun. The inputs were applied as percentages to the base estimate and then run in a Monte Carlo model using the @Risk program.

21.1.14.3 Management Reserve Analysis

No management reserve was allowed for.

21.1.14.4 Escalation

No escalation was proportioned to any part of the estimate.

21.1.15 Reclamation and Closure Capital Cost Estimate

Closure costs were provided in Section 20.7 and total approximately \$6.3 million.

21.2 Operating Cost Estimate

21.2.1 Basis of Operating Cost Estimate

The basis for the operating cost estimates are included in the discussions provided in the following sub-sections by discipline area.

The operating cost estimates have an accuracy range of $\pm 15\%$.

21.2.2 Mining Operating Cost Estimate

The mining costs were built up by first principles using the productivity assumptions in Section 16.9 and quotes. The mining costs were applied in the model to each profile type and ground support type. The mining costs were summarized by year and totaled for the LOM to determine the total mining costs.

A summary of the mining cost per ton is shown in Table 21-14.

Table 21-14: Summary of Underground Mining Costs per Ton

Mine	Yearly (000's of \$/a)	Percentage of Total Cost (%)	Mill Feed (\$/ton)
Blasting operating cost	35	0.2	0.14
Blasting product operating cost	1,251	6.7	4.83
Dual (drill & bolt) operating cost	436	2.3	1.68
Dual (drill & bolt) product operating cost	1,112	5.9	4.30
Mucking operating cost	592	3.1	2.29
Shotcrete operating cost	49	0.3	0.19
Transmixer operating cost	56	0.3	0.22
Trucking operating cost	524	2.8	2.03
Trucking backfill operating cost	199	1.1	0.77
Backfill product cost	3,481	18.5	13.45
<i>Subtotal mining operating cost</i>	<i>7,735</i>	<i>41.1</i>	<i>29.90</i>
Labor cost operating	6,471	34.4	25.01
Electrical cost operating	329	1.8	1.27
Diesel fuel cost operating	435	2.3	1.68
General supplies operating	97	0.5	0.37
<i>Subtotal general operating cost</i>	<i>7,332</i>	<i>39.0</i>	<i>28.33</i>
Total (mining + general)	15,067	80.1	58.23

Mine	Yearly (000's of \$/a)	Percentage of Total Cost (%)	Mill Feed (\$/ton)
General and administrative	3,732	19.9	14.42
Total Mine, General, and G&A	18,799	100.0	72.65

21.2.2.1 Costs Applied to Mine Plan Physicals

The costs shown in Table 21-15 were applied to the mine plan physicals to determine the total costs.

Table 21-15: Costs Applied to the Mine Plan Physicals

Cost	Unit	Development	15 Topcut	20 Undercut	30 Undercut
Blasting equipment	\$/hr	28.00	28.00	28.00	28.00
Blasting product	\$/ton	4.50	3.80	3.40	3.00
Dual equipment (drill & blast)	\$/hr	60.00	60.00	60.00	60.00
Dual product (drill & blast)	\$/ton	5.80	4.10	3.40	2.70
Truck haulage	\$/ton*mile	1.00	1.00	1.00	1.00
Jamming equipment	\$/hr	76.50	76.50	76.50	76.50
Mucking equipment	\$/hr	76.50	76.50	76.50	76.50
Shotcrete equipment	\$/hr	34.00	34.00	34.00	34.00
Shotcrete product	\$/ton	13.80	4.90	3.70	2.50
Transmixer haulage	\$/ton*mile	1.80	1.80	1.80	1.80
Raise bore cost	\$/ton	222.00			

The costs in Table 21-15 were determined using first principles build-up, quotes from suppliers, and InfoMine cost models.

21.2.2.2 Underground Labor

Staffing was estimated by benchmarking against similar projects. The labor costs incorporated requirements for underground operations such as operating underground equipment, technical support, underground electricians, underground mechanics, and underground management. A summary of the underground labor is included as Table 21-16.

Table 21-16: Underground Labor

Position	Labor Code	No of Employees	Total Cost per Year (\$/a)	Total Cost per Ton of Mill Feed (\$/ton feed)
Mine engineer	Salary	1	114,000	0.42
Mine surveyor	Salary	1	114,000	0.42
Mine geologist	Salary	1	114,000	0.42
Mine superintendent	Salary	1	145,300	0.53
Mine clerk	Hourly	1	50,000	0.18
Mine foreman	Salary	4	394,000	1.44

Underground miner	Hourly	28	2,617,200	9.60
Underground laborer	Hourly	22	1,562,100	5.73
Mine electricians	Hourly	1	88,400	0.32
Mine maintenance superintendent	Salary	1	145,300	0.53
Heavy equipment elec-mechanic	Hourly	10	884,100	3.24
Welder	Hourly	2	179,600	0.66
Serviceman	Hourly	2	167,400	0.61
Maintenance laborer	Hourly	2	176,800	0.65
Light vehicle mechanic	Hourly	1	71,000	0.26
Total Underground Personnel		78	6,823,200	25.01

21.2.2.3 Other Underground Costs

Power costs were estimated using consumptions from the equipment manufacturer and the cost of power. The total cost of power is \$1.27/ton or 1.8% of the total underground operating costs.

The diesel costs were estimated using consumptions from InfoMine cost models and the cost of local diesel. The total cost of diesel is \$1.68/ton or 2.3% of the total underground operating costs.

General supplies were estimated using 0.5% of the total underground operating costs. The total cost of general supplies is \$0.37/ton of the total underground operating costs. The general supplies included mining software, engineering supplies, geology supplies, survey supplies, and other general supplies.

21.2.3 Process Operating Cost Estimate

The LOM process operating cost is estimated \$54.5 M over the eight-year LOM. A breakdown of this value and its unit costs is presented in Table 21-17.

Table 21-17: Average Annual Process Operating Cost

Cost Center	Total Annual Costs (\$'000/a)	Percentage of Total (%)	Unit Costs	
			(\$ per tonne milled)	(\$ per ton milled)
Labor	3,245	42.7%	13.1	11.9
General Maintenance	1,060	13.9%	4.3	3.9
Power	1,142	15.0%	4.6	4.2
Reagents & Operating Consumables	1,945	25.6%	7.8	7.1
Maintenance Consumables	210	2.8%	0.8	0.8
Total	7,602	100	30.61	27.77

21.2.3.1 Reagents and Operating Consumables

Individual reagent consumption rates were estimated based on the metallurgical testwork results, Ausenco's in-house database and experience, industry practice, and peer-reviewed literature. Each reagent cost was obtained through benchmarking for similar projects performed by Ausenco.

Other consumables (e.g., liners for the primary crusher, SAG mill, ball mill, and ball media for the mills) were estimated using:

- Metallurgical testing results (abrasion index);
- Ausenco's in-house calculation methods, including simulations;
- Forecast nominal power consumption.

Reagents and consumables represent approximately 25.6% of the total process operating cost at \$7.1/ton of plant feed.

21.2.3.2 Maintenance

General maintenance costs were 13.9% of the total operating cost at \$3.90/ton. Annual maintenance consumable costs were calculated based on a total installed mechanical capital cost by area using a weighted average factor from 1–5%. The factor was applied to mechanical equipment, platework, and piping. The total maintenance consumable operating cost was \$0.80/ton milled, or approximately 2.8% of the total process operating cost.

21.2.3.3 Power

The processing power draw was based on the average power utilization of each motor on the electrical load list for the process plant and services. Power will be supplied by the Idaho Power grid to service the facilities at the site. The total process plant power cost is \$4.20/ton, approximately 15.0% of the total process operating cost.

21.2.3.4 Mobile Equipment

Vehicle costs were based on a scheduled number of light vehicles and mobile equipment, including fuel, maintenance, spares and tires, and annual registration and insurance fees.

21.2.3.5 Labor

Staffing was estimated by benchmarking against similar projects. The labor costs incorporate requirements for plant operation, such as management, metallurgy, operations, maintenance, site services, assay laboratory, and contractor allowance. The total operational labor averages 37 employees.

Individual personnel were divided into their respective positions and classified as either 10-hour or 12-hour shift employees. Salaries were determined using published US labor market data and were used to develop the total G&A labor cost. The rates were estimated as overall rates, including all burden costs.

21.2.4 General and Administrative Operating Cost Estimate

A bottoms-up approach was used to develop estimates for G&A costs over the LOM. The G&A costs were determined for an eight-year mine life with an average cost of \$10.25/ton milled.

The G&A labor costs were estimated by developing a headcount profile for each department that was then forecast over the LOM. Labor rates were determined based on published US labor market data and were applied to develop the total G&A labor cost.

Health and safety equipment, supplies, training, and environmental costs were provided by Paramount Gold, as were the information technology and telecommunications costs for telecommunication, networking, internet, computers, radio system, and repairs.

A breakdown summary of forecast LOM G&A costs is shown in Table 21-18.

Table 21-18: Annual Average G&A Operating Cost Summary

Cost Centre	2020 FS Cost	Average Annual Cost	
	\$/a	US\$/ton milled	US\$/metric tonne milled
G&A maintenance	80,000	0.31	0.34
Personnel	2,479,000	9.58	10.56
Human resources and public relations	181,000	0.70	0.77
Power	0	0.00	0.00
Laboratory	86,000	0.33	0.37
Miscellaneous, supplies & equipment	133,000	0.51	0.57
Fees and consulting services	169,000	0.65	0.72
G&A vehicles & transportation	23,000	0.09	0.10
Environmental	12,000	0.05	0.05
IT & telecommunications	60,000	0.23	0.26
Contract services	425,000	1.64	1.81
Mine software	36,000	0.14	0.15
Mine hardware	48,000	0.19	0.20
Total	3,732,000	14.42	15.90

22 ECONOMIC ANALYSIS

22.1 Cautionary Statement Regarding Forward-Looking Information

The results of the economic analyses discussed in this section represent forward-looking information as defined under Canadian securities law. The results depend on inputs that are subject to a number of known and unknown risks, uncertainties, and other factors that may cause actual results to differ materially from those presented herein. Information that is forward-looking includes the following:

- Proven and Probable Mineral Reserve estimates which have been modified from Measured and Indicated Mineral Resource estimates;
- Assumed commodity prices and exchange rates;
- Proposed mine production plan;
- Projected mining and process recovery rates;
- Assumptions as to mining dilution;
- Assumptions as to geotechnical support requirements for underground openings;
- Proposed sustaining costs and operating costs;
- Seabridge's intentions to convert the NPI royalty into Paramount equity upon Paramount securing sufficient construction financing;
- Assumptions as to closure costs and closure requirements;
- Assumptions as to environmental, permitting, and social risks.

Additional risks to the forward-looking information include:

- Changes to costs of production from what is assumed;
- Unexpected variations in quantity of mineralized material, grade or recovery rates;
- Geotechnical or hydrogeological considerations during mining being different from what was assumed;
- Failure of mining methods to operate as anticipated;
- Failure of plant, equipment or processes to operate as anticipated;
- Changes to assumptions as to the availability of electrical power, and the power rates used in the operating cost estimates and financial analysis;
- Unrecognized environmental risks;
- Unanticipated reclamation expenses;
- Ability to maintain the social license to operate;
- Accidents, labor disputes and other risks of the mining industry;
- Changes to interest rates;
- Changes to tax rates.

Calendar years used in the financial analysis are provided for conceptual purposes only. Additional permits still must be obtained in support of operations; and approval to proceed is still required from Paramount's Board of Directors.

22.2 Methodology Used

An economic model was developed to estimate annual pre-tax and post-tax cash flows and sensitivities of the Project based on a 5% discount rate. Tax estimates involve complex variables that can only be accurately calculated during operations and, as such, the after-tax results are approximations.

The capital and operating cost estimates developed specifically for this Project are presented in Section 21 using third quarter (Q3) 2020 US dollars. The economic analysis was run on a constant dollar basis with no inflation.

22.3 Financial Model Parameters

The economic analysis contemplated in the 2020 FS uses metal prices that remain constant over the Project life and are based on a two-year average price of US\$1,472/oz gold and US\$16.64/oz silver prices as of August 31, 2020. No price inflation or escalation factors were taken into account. Commodity prices can be volatile, and there is the potential for deviation from the forecast.

The economic analysis was performed using the following assumptions:

- Construction period of 18 months beginning March 1, 2022;
- All construction costs are capitalized;
- Commercial production starting (effectively) on September 1, 2023;
- Mine life of 7.8 years;
- Cost estimates in constant Q3 2020 U.S dollars with no inflation or escalation;
- Capital costs funded with 100% equity (no financing costs assumed);
- All cash flows discounted to the start of construction;
- Metal is assumed to be sold in the same year it is produced;
- No contractual arrangements for refining are in place.

22.4 Taxes

The Project was evaluated on an after-tax basis to provide an approximate value of the potential economics. The tax model was prepared by MNP LLP, an independent tax consultant. The calculations are based on the tax regime as of the date of the 2020 FS, include estimates for Paramount's expenditures, and related impacts to various tax pool balances, between the 2020 FS and the assumed construction start date.

At the Report effective date, the Project was assumed to be subject to the following tax regime:

- US Federal corporate income tax system of a 21% tax rate;
- Oregon tax rate of 7.6% for net proceeds of more than \$1 million;
- Total undiscounted tax payments are estimated to be \$26.2 million over the LOM.

22.5 Closure Costs & Salvage Value

The closure cost was estimated to be \$6.3 million.

22.6 Royalty

A 1.5% NSR royalty was assumed, resulting in approximately \$8.1 million in undiscounted royalty payments over the LOM. The 2020 FS assumes that Seabridge will convert its 10% NPI royalty into Paramount equity upon Paramount securing sufficient construction financing, and thus the NPI was not included in the financial model. In the event that Seabridge does not convert its NPI into equity, the NPV would be reduced by \$3.6 million to \$101.5 million from the base case of \$105.2 million.

22.7 Economic Analysis

The economic analysis was performed assuming a 5% discount rate.


The pre-tax net present value (NPV) discounted at 5% is \$123.2 million; the internal rate of return (IRR) is 27.9%; and payback period is 3.1 years.

On an after-tax basis, the NPV discounted at 5% is \$105.2 million; the IRR is 26.0%; and the payback period is 3.1 years.

A summary of forecast Project economics is shown graphically in Figure 22-1 and listed in Table 22-1.

A cashflow on an annualized basis is provided in Table 22-2 and Table 22-3.

Figure 22-1: Forecast Project Post-Tax Unlevered Free Cash Flow (US\$ M)

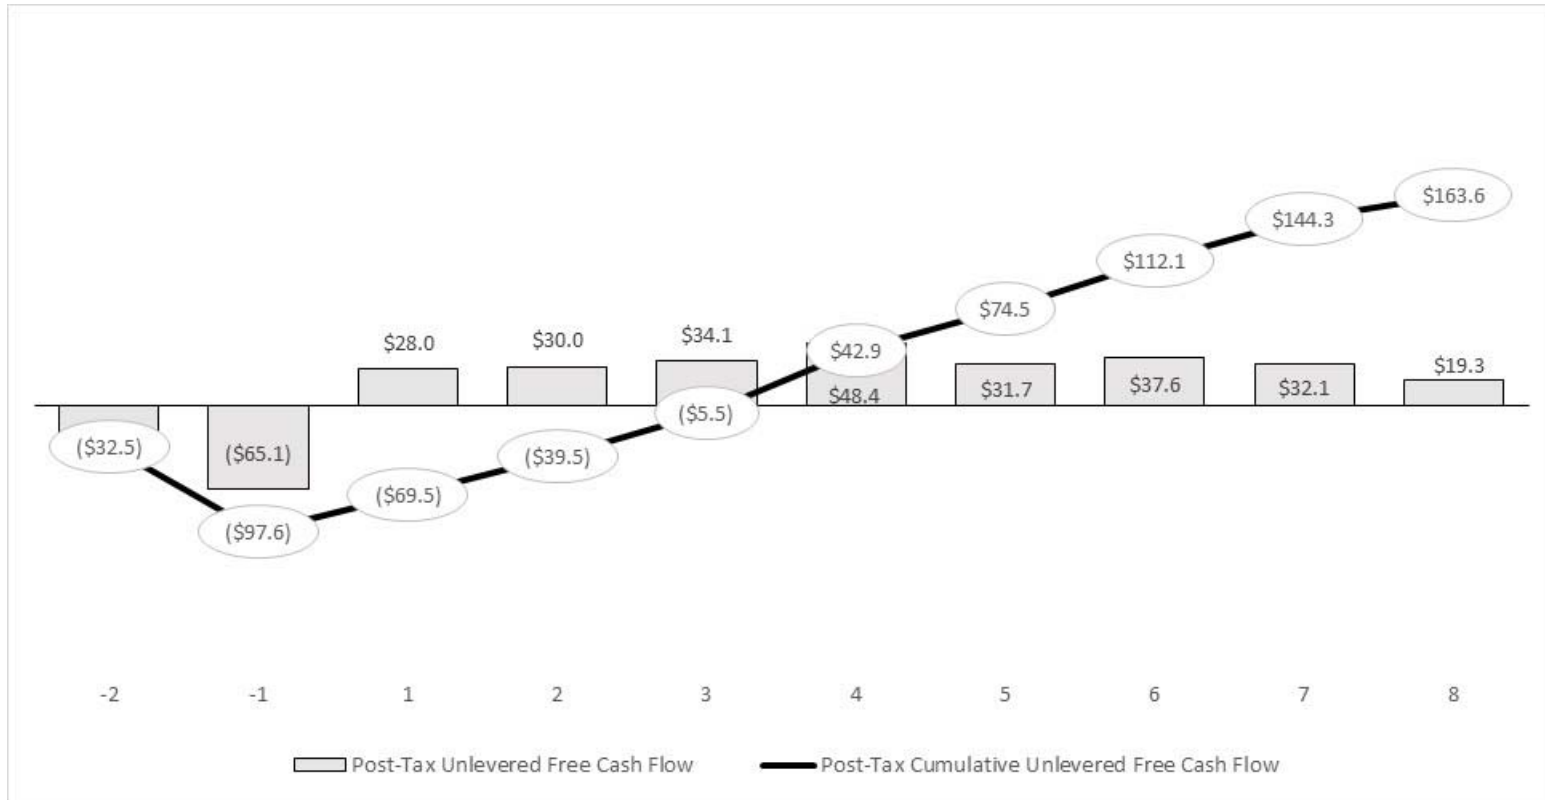

Note: Figure prepared by: Ausenco 2020. Unlevered free cash flow represents the Project cash flow before taking interests payments into account.

Table 22-1: Summary of Forecast Project Economics

Area	Item	Units	LOM Total/Avg.
General	Gold price	US\$/oz	1,472
	Silver price	US\$/oz	16.64
	Mine life	years	7.8
	Total mill feed tons	tons x 1,000	2,070
Production (gold)	Mill head grade Au	oz/ton	0.19
	Mill recovery rate Au	%	92.8
	Total mill ounces recovered Au	oz x 1,000	361.8
	Total average annual production Au	oz x 1,000	46.6
Production (silver)	Mill head grade Ag	oz/ton	0.28
	Mill recovery rate Ag	%	73.5
	Total mill ounces recovered Ag	oz x 1,000	424.8
	Total average annual production Ag	oz x 1,000	54.5
Operating Costs	Mining cost	US\$/ton mined	58.2
	Processing cost	US\$/ton milled	27.8
	G&A cost	US\$/ton milled	14.4
	Total operating costs	US\$/ton milled	100.4
	Refining cost Au	US\$/oz	5.0
	Refining cost Ag	US\$/oz	0.5
	*Cash costs net of by-products	US\$/oz Au	584
	**AISC net of by-products	US\$/oz Au	672
Capital Costs	Initial capital	US\$ M	97.5
	Sustaining capital	US\$ M	25.6
	Closure costs	US\$ M	6.3
Financials(pre-tax)	Pre-tax NPV	5%	123.2
	Pre-tax IRR	%	27.9
	Pre-tax Payback	years	3.1
Financials(post-tax)	Post-tax NPV	5%	105.2
	Post-tax IRR	%	26.0
	Post-tax Payback	years	3.1

Notes: * Cash costs consist of mining costs, processing costs, mine-level G&A and refining charges and royalties. ** All-in sustaining costs (AISC) includes cash costs plus sustaining capital and closure costs. AISC is at the Project-level and does not include an estimate of corporate G&A.

Table 22-2: Project Cash Flow on an Annualized Basis (part A)

			Inputs	Units	Total / Avg.	-2	-1	1	2	3	4	5	6	7	8
Cash flows discounted to March 01, 2022															
Gross Revenue				US\$M	\$538.9	--	--	\$63.6	\$68.2	\$69.8	\$80.1	\$68.4	\$77.1	\$67.0	\$44.6
Refining Charges				US\$M	(\$2.0)	--	--	(\$0.2)	(\$0.3)	(\$0.3)	(\$0.3)	(\$0.3)	(\$0.3)	(\$0.3)	(\$0.2)
Royalties				US\$M	(\$8.1)	--	--	(\$1.0)	(\$1.0)	(\$1.0)	(\$1.2)	(\$1.0)	(\$1.2)	(\$1.0)	(\$0.7)
Operating Expenses				US\$M	(\$207.9)	--	(\$0.0)	(\$22.8)	(\$27.2)	(\$27.2)	(\$27.7)	(\$27.6)	(\$28.3)	(\$26.7)	(\$20.4)
EBITDA				US\$M	\$321.0	--	(\$0.0)	\$39.7	\$39.8	\$41.3	\$50.9	\$39.5	\$47.4	\$39.1	\$23.4
Initial Capital Cost				US\$M	(\$97.5)	(\$32.5)	(\$65.0)	--	--	--	--	--	--	--	--
Sustaining Capital Cost				US\$M	(\$25.6)*	--	--	(\$11.6)	(\$9.8)	(\$7.3)	(\$1.8)	(\$1.4)	(\$1.7)	--	5.8*
Closure Capital Cost				US\$M	(\$6.3)*	--	--	--	--	--	--	--	--	--	(\$5.1)*
Pre-Tax Unlevered Free Cash Flow				US\$M	(\$0.0)	(\$32.5)	(\$65.1)	\$28.0	\$30.0	\$34.1	\$49.1	\$38.0	\$45.7	\$39.1	\$23.4
Pre-Tax Cumulative Unlevered Free Cash Flow				US\$M		(\$32.5)	(\$97.6)	(\$69.5)	(\$39.5)	(\$5.5)	\$43.7	\$81.7	\$127.4	\$166.5	\$189.9
Pre-Tax Payback Flag						--	--	--	--	--	3.1	--	--	--	--
Federal & State Tax Payable				US\$M	(\$26.2)	--	--	--	--	--	(\$0.8)	(\$6.4)	(\$8.1)	(\$6.9)	(\$4.0)
Post-Tax Unlevered Free Cash Flow				US\$M	(\$0.0)	(\$32.5)	(\$65.1)	\$28.0	\$30.0	\$34.1	\$48.4	\$31.7	\$37.6	\$32.1	\$19.3
Post-Tax Cumulative Unlevered Free Cash Flow				US\$M		(\$32.5)	(\$97.6)	(\$69.5)	(\$39.5)	(\$5.5)	\$42.9	\$74.5	\$112.1	\$144.3	\$163.6
Post-Tax Payback Flag						--	--	--	--	--	3.1	--	--	--	--
	Sensitivity %			Pre-Tax	Post-Tax										
NPV (5%)	--	5.0%	US\$M	\$123.2	\$105.2										
IRR			%	27.9%	26.0%										
Payback			yrs	3.1	3.1										
Production															
Production Summary															
Production Summary															
Mill Life				yrs	7.8	--	--	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.8
Total Ore Sent to Mill				ktons	2,070	--	--	230	288	267	281	278	304	266	156
Mill Head Grade Au				oz/ton	0.19	--	--	0.20	0.17	0.19	0.21	0.18	0.18	0.18	0.21
Contained Au				koz	390	--	--	45.92	49.57	50.57	57.83	49.53	55.85	48.50	32.17
Mill Recovery Au				%	92.8%	--	--	93.0%	92.5%	92.8%	93.1%	92.6%	92.7%	92.7%	93.1%
Total Au Produced from Mill				koz	362	--	--	43	46	47	54	46	52	45	30
Gold % Payable				%	99.9%	--	--	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%
			Per Annum		Total LOM										
Total Payable Gold			47	kozs	361	--	--	43	46	47	54	46	52	45	30
Total Ore Sent to Mill				ktons	2,070	--	--	230	288	267	281	278	304	266	156
Mill Head Grade Ag				oz/ton	0.28	--	--	0.30	0.25	0.26	0.29	0.29	0.28	0.29	0.31
Contained Ag				koz	578	--	--	69.60	71.42	68.22	80.22	79.66	84.13	76.29	48.73
Mill Recovery Ag				%	73.5%	--	--	74.6%	71.6%	72.1%	73.8%	73.3%	73.3%	73.9%	75.0%
Total Ag Produced from Mill				koz	425	--	--	52	51	49	59	59	62	56	37
Silver % Payable				%	99.5%	--	--	99.5%	99.5%	99.5%	99.5%	99.5%	99.5%	99.5%	99.5%
			Per Annum												
Total Payable Silver			55	kozs	423	--	--	52	51	49	59	59	61	56	36
			Per Annum												
Total Payable Gold Equivalent			47	kozs	366	--	--	43	46	47	54	46	52	46	30
Macro Assumptions															
Gold Price				US\$/oz	\$1,472	\$1,472	\$1,472	\$1,472	\$1,472	\$1,472	\$1,472	\$1,472	\$1,472	\$1,472	\$1,472
Silver Price				US\$/oz	\$16.64	\$16.64	\$16.64	\$16.64	\$16.64	\$16.64	\$16.64	\$16.64	\$16.64	\$16.64	\$16.64
Total Gold Revenue				US\$M	\$531.9	--	--	\$62.8	\$67.4	\$69.0	\$79.1	\$67.4	\$76.1	\$66.1	\$44.0
Total Silver Revenue				US\$M	\$7.0	--	--	\$0.9	\$0.8	\$0.8	\$1.0	\$1.0	\$1.0	\$0.9	\$0.6
Total Gross Revenue				US\$M	\$538.9	--	--	\$63.6	\$68.2	\$69.8	\$80.1	\$68.4	\$77.1	\$67.0	\$44.6

Note: For the purpose of fitting the table onto this page, closure and sustaining costs in years 9 + were discounted to year 8, resulting in a small discrepancy between LOM total costs and the sum of yearly cashflow figures. All dollar figures are in Real 2020 US\$ millions unless otherwise noted.

Table 22-3: Project Cash Flow on an Annualized Basis (part B)

Inputs	Units	Total / Avg.	-2	-1	1	2	3	4	5	6	7	8			
Total Mill Feed	ktons	2,070	--	--	230	288	267	281	278	304	266	156			
Total Payable Gold Ounces	kozs	361	--	--	43	46	47	54	46	52	45	30			
Total Payable Silver Ounces	kozs	423	--	--	52	51	49	59	59	61	56	36			
Total Gross Revenue	US\$m	\$538.9	--	--	\$63.6	\$68.2	\$69.8	\$80.1	\$68.4	\$77.1	\$67.0	\$44.6			
Refining Cost Au	US\$m	\$5.00	--	--	\$0.2	\$0.2	\$0.2	\$0.3	\$0.2	\$0.3	\$0.2	\$0.1			
Refining Cost Ag	US\$m	\$0.50	--	--	\$0.0	\$0.0	\$0.0	\$0.0	\$0.0	\$0.0	\$0.0	\$0.0			
Revenue Less Refining Charge	US\$m	\$536.9	--	--	\$63.4	\$68.0	\$69.6	\$79.8	\$68.1	\$76.8	\$66.8	\$44.5			
NSR Royalty	US\$m	\$8.1	--	--	\$1.0	\$1.0	\$1.0	\$1.2	\$1.0	\$1.2	\$1.0	\$0.7			
Total Net Revenue	US\$mm	\$528.8	--	--	\$62.4	\$67.0	\$68.5	\$78.6	\$67.1	\$75.7	\$65.8	\$43.8			
Operating Costs															
			Sensitivity												
Total Operating Costs	US\$mm/year	\$/ton proc		US\$mm	\$207.9	--	\$0.0	\$22.8	\$27.2	\$27.2	\$27.7	\$27.6	\$28.3	\$26.7	\$20.4
Total Mine Operating Costs		\$58.23		US\$m	\$120.5	--	\$0.0	\$12.7	\$15.4	\$16.0	\$16.1	\$16.2	\$16.1	\$15.6	\$12.4
Total Mill Processing		\$27.77		US\$m	\$57.5	--	--	\$6.4	\$8.0	\$7.4	\$7.8	\$7.7	\$8.5	\$7.4	\$4.3
Total G&A Costs		\$3.7		US\$m	\$29.9	--	--	\$3.7	\$3.7	\$3.7	\$3.7	\$3.7	\$3.7	\$3.7	\$3.7
<i>Operating Costs per Ton Processed</i>				US\$/ton Processed	\$100.4	--	--	\$99.2	\$94.3	\$101.9	\$98.5	\$99.3	\$93.0	\$100.4	\$131.1
Cash Cost															
By-Product Basis															
Cash Cost*				US\$/Au oz	\$583.6	--	--	\$541.7	\$602.9	\$589.9	\$524.1	\$610.1	\$555.2	\$601.6	\$690.6
All-in Sustaining Cost**				US\$/Au oz	\$671.9	--	--	\$814.1	\$816.4	\$745.4	\$557.6	\$641.1	\$587.7	\$601.6	\$690.6
* Cash costs consist of mining costs, processing costs, mine-level G&A and refining charges and royalties															
** AISC includes cash costs plus sustaining capital and closure costs															
Capital Expenditures															
Initial Capital Cost, US\$mm		\$97.5													
Mine		\$10.7													
Site Development		\$4.0													
Plant		\$23.4													
Process Indirects		\$14.3													
On-Site Infrastructure		\$12.2													
Off-Site Infrastructure		\$9.1													
TSF		\$6.0													
Owners Capital		\$7.7													
Contingency		\$10.1													
			Sensitivity												
Total Initial Capital Cost				US\$m	\$97.5	\$32.5	\$65.0	--	--	--	--	--	--	--	--
Total Initial Capital Cost - FS				US\$m	\$97.5	\$32.5	\$65.0	--	--	--	--	--	--	--	--
Total Sustaining Capital Cost				US\$m	\$25.6	--	--	\$11.6	\$9.8	\$7.3	\$1.8	\$1.4	\$1.7	--	--
Total Sustaining Infrastructure Capital Cost				US\$m	\$1.2	--	--	\$0.2	\$0.8	\$0.2	--	--	--	--	--
Total Sustaining Tailings Capital Cost				US\$m	\$14.6	--	--	\$3.6	\$4.3	\$1.7	\$1.7	\$1.7	\$1.7	--	--
Total Sustaining Mining Capital Cost				US\$m	\$15.0	--	--	\$7.7	\$4.7	\$2.4	\$0.1	--	--	--	--
Total Sustaining Processing Capital Cost				US\$m	\$0.3	--	--	--	--	\$0.3	--	--	--	--	--
Total Sustaining Owner/Other Cost				US\$m	(\$5.6)*	--	--	--	--	\$2.7	--	(\$0.3)	--	--	(\$5.8)*
Total Closure Cost				US\$m	\$6.3*	--	--	--	--	--	--	--	--	--	\$5.1*

Note: For the purpose of fitting the table onto this page, closure and sustaining costs in years 9 + were discounted to year 8, resulting in a small discrepancy between LOM total costs and the sum of yearly cashflow figures. All dollar figures are in Real 2020 US\$ millions unless otherwise noted.

22.8 Sensitivity Analysis

A sensitivity analysis was conducted on the base case pre-tax and after-tax NPV and IRR, using the following variables: gold price, mill head grades, initial capital cost, operating cost, metallurgical recovery, and discount rate.

Table 22-4 shows the pre-tax sensitivity, and Table 22-5 shows the post-tax sensitivity results.

The vertical axis across the tables shows impacts of different discount rates, operating costs, initial capital costs and mill head grades all factored at $\pm 10\%$ and $\pm 20\%$. Since metallurgical recoveries are subject to a maximum of 100%, the vertical axis shows impact of adding or subtracting 2% and 4% from annual metallurgical recovery rates. The horizontal axis across the tables represents changes in the gold price.

The analysis showed that the Project is most sensitive to, in order from most to least sensitive:

- Gold price;
- Mill head grade;
- Metallurgical recovery rates;
- Initial capital cost;
- Discount rate;
- Operating cost.

Table 22-4: Pre-Tax Sensitivity

		Pre-Tax NPV Sensitivity to Discount Rate (US\$M)						Pre-Tax IRR Sensitivity to Discount Rate						
Discount Rate	Gold Price (US\$/oz)							Gold Price (US\$/oz)						
	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000		
1.0%	\$51	\$118	\$176	\$219	\$319	\$353	10.0%	10.0%	20.2%	27.9%	33.2%	44.7%	48.3%	
3.0%	\$36	\$96	\$147	\$186	\$276	\$306	3.0%	10.0%	20.2%	27.9%	33.2%	44.7%	48.3%	
5.0%	\$23	\$77	\$123	\$158	\$238	\$265	5.0%	10.0%	20.2%	27.9%	33.2%	44.7%	48.3%	
8.0%	\$8	\$54	\$93	\$123	\$192	\$215	8.0%	10.0%	20.2%	27.9%	33.2%	44.7%	48.3%	
10.0%	\$0	\$42	\$77	\$104	\$166	\$187	10.0%	10.0%	20.2%	27.9%	33.2%	44.7%	48.3%	
		Pre-Tax NPV Sensitivity to Operating Costs (US\$M)						Pre-Tax IRR Sensitivity to Operating Costs						
Operating Costs	Gold Price (US\$/oz)							Gold Price (US\$/oz)						
	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000		
(20.0%)	\$28	\$82	\$128	\$162	\$243	\$270	(20.0%)	10.9%	21.0%	28.6%	33.9%	45.3%	48.8%	
(10.0%)	\$26	\$79	\$125	\$160	\$240	\$267	(10.0%)	10.5%	20.6%	28.2%	33.5%	45.0%	48.5%	
--	\$23	\$77	\$123	\$158	\$238	\$265	--	10.0%	20.2%	27.9%	33.2%	44.7%	48.3%	
10.0%	\$21	\$75	\$121	\$155	\$236	\$263	10.0%	9.5%	19.8%	27.5%	32.9%	44.4%	48.0%	
20.0%	\$19	\$73	\$119	\$153	\$234	\$261	20.0%	9.1%	19.4%	27.2%	32.5%	44.1%	47.7%	
		Pre-Tax NPV Sensitivity to Initial Capital Costs (US\$M)						Pre-Tax IRR Sensitivity to Initial Capital Costs						
Initial Capital Costs	Gold Price (US\$/oz)							Gold Price (US\$/oz)						
	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000		
(20.0%)	\$42	\$95	\$142	\$176	\$257	\$284	(20.0%)	15.4%	26.9%	35.6%	41.7%	54.8%	59.0%	
(10.0%)	\$33	\$86	\$132	\$167	\$247	\$274	(10.0%)	12.5%	23.3%	31.4%	37.1%	49.3%	53.1%	
--	\$23	\$77	\$123	\$158	\$238	\$265	--	10.0%	20.2%	27.9%	33.2%	44.7%	48.3%	
10.0%	\$14	\$68	\$114	\$148	\$229	\$256	10.0%	7.8%	17.5%	24.8%	29.9%	40.7%	44.1%	
20.0%	\$5	\$59	\$105	\$139	\$220	\$247	20.0%	5.9%	15.2%	22.2%	27.0%	37.3%	40.5%	
		Pre-Tax NPV Sensitivity to Metallurgical Recovery (US\$M)						Pre-Tax IRR Sensitivity to Metallurgical Recovery						
Metallurgical Recovery	Gold Price (US\$/oz)							Gold Price (US\$/oz)						
	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000		
(-) 4.0%	\$10	\$62	\$106	\$139	\$216	\$242	(-) 4.0%	7.3%	17.4%	25.1%	30.3%	41.6%	45.1%	
(-) 2.0%	\$17	\$69	\$115	\$148	\$227	\$253	(-) 2.0%	8.7%	18.8%	26.5%	31.8%	43.2%	46.7%	
--	\$23	\$77	\$123	\$158	\$238	\$265	--	10.0%	20.2%	27.9%	33.2%	44.7%	48.3%	
(+) 2.0%	\$30	\$85	\$132	\$167	\$249	\$277	(+) 2.0%	11.3%	21.5%	29.2%	34.6%	46.2%	49.8%	
(+) 4.0%	\$36	\$92	\$140	\$176	\$260	\$288	(+) 4.0%	12.6%	22.8%	30.6%	36.0%	47.6%	51.3%	
		Pre-Tax NPV Sensitivity to Mill Head Grade (US\$M)						Pre-Tax IRR Sensitivity to Mill Head Grade						
Mill Head Grade	Gold Price (US\$/oz)							Gold Price (US\$/oz)						
	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000		
(20.0%)	(\$37)	\$6	\$43	\$71	\$135	\$157	(20.0%)	0.0%	6.4%	14.0%	19.1%	29.8%	33.1%	
(10.0%)	(\$7)	\$42	\$83	\$114	\$187	\$211	(10.0%)	3.5%	13.7%	21.3%	26.5%	37.5%	40.9%	
--	\$23	\$77	\$123	\$158	\$238	\$265	--	10.0%	20.2%	27.9%	33.2%	44.7%	48.3%	
10.0%	\$53	\$112	\$163	\$201	\$290	\$319	10.0%	15.9%	26.1%	34.0%	39.5%	51.4%	55.2%	
20.0%	\$83	\$148	\$203	\$244	\$341	\$373	20.0%	21.2%	31.7%	39.8%	45.5%	57.9%	61.8%	

Note: Boxed and shaded value is the base case.

Table 22-5: Post-Tax Sensitivity

		Post-Tax NPV Sensitivity to Discount Rate (US\$M)						Post-Tax IRR Sensitivity to Discount Rate						
		Gold Price (US\$/oz)						Gold Price (US\$/oz)						
		\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	
Discount Rate	1.0%	\$51	\$106	\$151	\$185	\$262	\$288	10.0%	10.0%	19.2%	26.0%	30.7%	40.9%	44.1%
	3.0%	\$36	\$86	\$126	\$156	\$226	\$249	3.0% <td>10.0%</td> <td>19.2%</td> <td>26.0%</td> <td>30.7%</td> <td>40.9%</td> <td>44.1%</td>	10.0%	19.2%	26.0%	30.7%	40.9%	44.1%
	5.0%	\$23	\$69	\$105	\$132	\$195	\$215	5.0% <td>10.0%</td> <td>19.2%</td> <td>26.0%</td> <td>30.7%</td> <td>40.9%</td> <td>44.1%</td>	10.0%	19.2%	26.0%	30.7%	40.9%	44.1%
	8.0%	\$8	\$48	\$79	\$102	\$156	\$174	8.0% <td>10.0%</td> <td>19.2%</td> <td>26.0%</td> <td>30.7%</td> <td>40.9%</td> <td>44.1%</td>	10.0%	19.2%	26.0%	30.7%	40.9%	44.1%
	10.0%	\$0	\$36	\$65	\$86	\$134	\$151	10.0% <td>10.0%</td> <td>19.2%</td> <td>26.0%</td> <td>30.7%</td> <td>40.9%</td> <td>44.1%</td>	10.0%	19.2%	26.0%	30.7%	40.9%	44.1%
		Post-Tax NPV Sensitivity to Operating Costs (US\$M)						Post-Tax IRR Sensitivity to Operating Costs						
		Gold Price (US\$/oz)						Gold Price (US\$/oz)						
		\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	
Operating Costs	(20.0%)	\$28	\$72	\$108	\$135	\$198	\$219	(20.0%) <td>10.9%</td> <td>19.8%</td> <td>26.6%</td> <td>31.3%</td> <td>41.4%</td> <td>44.6%</td>	10.9%	19.8%	26.6%	31.3%	41.4%	44.6%
	(10.0%)	\$26	\$70	\$107	\$134	\$196	\$217	(10.0%) <td>10.5%</td> <td>19.5%</td> <td>26.3%</td> <td>31.0%</td> <td>41.2%</td> <td>44.4%</td>	10.5%	19.5%	26.3%	31.0%	41.2%	44.4%
	--	\$23	\$69	\$105	\$132	\$195	\$215	-- <td>10.0%</td> <td>19.2%</td> <td>26.0%</td> <td>30.7%</td> <td>40.9%</td> <td>44.1%</td>	10.0%	19.2%	26.0%	30.7%	40.9%	44.1%
	10.0%	\$21	\$67	\$104	\$130	\$193	\$214	10.0% <td>9.5%</td> <td>18.8%</td> <td>25.7%</td> <td>30.4%</td> <td>40.7%</td> <td>43.9%</td>	9.5%	18.8%	25.7%	30.4%	40.7%	43.9%
	20.0%	\$19	\$65	\$102	\$129	\$191	\$212	20.0% <td>9.1%</td> <td>18.5%</td> <td>25.4%</td> <td>30.1%</td> <td>40.4%</td> <td>43.6%</td>	9.1%	18.5%	25.4%	30.1%	40.4%	43.6%
		Post-Tax NPV Sensitivity to Initial Capital Costs (US\$M)						Post-Tax IRR Sensitivity to Initial Capital Costs						
		Gold Price (US\$/oz)						Gold Price (US\$/oz)						
		\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	
Initial Capital Costs	(20.0%)	\$42	\$87	\$124	\$150	\$213	\$234	(20.0%) <td>15.4%</td> <td>26.0%</td> <td>33.8%</td> <td>39.3%</td> <td>51.1%</td> <td>54.8%</td>	15.4%	26.0%	33.8%	39.3%	51.1%	54.8%
	(10.0%)	\$33	\$78	\$114	\$141	\$204	\$225	(10.0%) <td>12.5%</td> <td>22.3%</td> <td>29.6%</td> <td>34.6%</td> <td>45.6%</td> <td>49.0%</td>	12.5%	22.3%	29.6%	34.6%	45.6%	49.0%
	--	\$23	\$69	\$105	\$132	\$195	\$215	-- <td>10.0%</td> <td>19.2%</td> <td>26.0%</td> <td>30.7%</td> <td>40.9%</td> <td>44.1%</td>	10.0%	19.2%	26.0%	30.7%	40.9%	44.1%
	10.0%	\$14	\$60	\$96	\$123	\$185	\$206	10.0% <td>7.8%</td> <td>16.5%</td> <td>22.9%</td> <td>27.4%</td> <td>37.0%</td> <td>40.0%</td>	7.8%	16.5%	22.9%	27.4%	37.0%	40.0%
	20.0%	\$5	\$50	\$87	\$114	\$176	\$197	20.0% <td>5.9%</td> <td>14.1%</td> <td>20.2%</td> <td>24.4%</td> <td>33.6%</td> <td>36.4%</td>	5.9%	14.1%	20.2%	24.4%	33.6%	36.4%
		Post-Tax NPV Sensitivity to Metallurgical Recovery (US\$M)						Post-Tax IRR Sensitivity to Metallurgical Recovery						
		Gold Price (US\$/oz)						Gold Price (US\$/oz)						
		\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	
Metallurgical Recovery	(-) 4.0%	\$10	\$57	\$92	\$117	\$177	\$197	(-) 4.0% <td>7.3%</td> <td>16.8%</td> <td>23.5%</td> <td>28.2%</td> <td>38.2%</td> <td>41.3%</td>	7.3%	16.8%	23.5%	28.2%	38.2%	41.3%
	(-) 2.0%	\$17	\$63	\$98	\$125	\$186	\$206	(-) 2.0% <td>8.7%</td> <td>18.0%</td> <td>24.8%</td> <td>29.4%</td> <td>39.6%</td> <td>42.7%</td>	8.7%	18.0%	24.8%	29.4%	39.6%	42.7%
	--	\$23	\$69	\$105	\$132	\$195	\$215	-- <td>10.0%</td> <td>19.2%</td> <td>26.0%</td> <td>30.7%</td> <td>40.9%</td> <td>44.1%</td>	10.0%	19.2%	26.0%	30.7%	40.9%	44.1%
	(+) 2.0%	\$30	\$75	\$112	\$139	\$203	\$225	(+) 2.0% <td>11.3%</td> <td>20.4%</td> <td>27.2%</td> <td>32.0%</td> <td>42.3%</td> <td>45.5%</td>	11.3%	20.4%	27.2%	32.0%	42.3%	45.5%
	(+) 4.0%	\$36	\$81	\$119	\$147	\$212	\$234	(+) 4.0% <td>12.5%</td> <td>21.5%</td> <td>28.4%</td> <td>33.2%</td> <td>43.6%</td> <td>46.9%</td>	12.5%	21.5%	28.4%	33.2%	43.6%	46.9%
		Post-Tax NPV Sensitivity to Mill Head Grade (US\$M)						Post-Tax IRR Sensitivity to Mill Head Grade						
		Gold Price (US\$/oz)						Gold Price (US\$/oz)						
		\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	\$1,100	\$1,300	\$1,472	\$1,600	\$1,900	\$2,000	
Mill Head Grade	(20.0%)	(\$37)	\$6	\$42	\$64	\$115	\$131	(20.0%) <td>0.0%</td> <td>6.4%</td> <td>13.7%</td> <td>18.2%</td> <td>27.7%</td> <td>30.6%</td>	0.0%	6.4%	13.7%	18.2%	27.7%	30.6%
	(10.0%)	(\$7)	\$40	\$74	\$98	\$155	\$174	(10.0%) <td>3.5%</td> <td>13.5%</td> <td>20.1%</td> <td>24.7%</td> <td>34.6%</td> <td>37.6%</td>	3.5%	13.5%	20.1%	24.7%	34.6%	37.6%
	--	\$23	\$69	\$105	\$132	\$195	\$215	-- <td>10.0%</td> <td>19.2%</td> <td>26.0%</td> <td>30.7%</td> <td>40.9%</td> <td>44.1%</td>	10.0%	19.2%	26.0%	30.7%	40.9%	44.1%
	10.0%	\$50	\$97	\$136	\$166	\$235	\$257	10.0% <td>15.4%</td> <td>24.5%</td> <td>31.4%</td> <td>36.4%</td> <td>47.0%</td> <td>50.3%</td>	15.4%	24.5%	31.4%	36.4%	47.0%	50.3%
	20.0%	\$74	\$124	\$167	\$199	\$274	\$299	20.0% <td>20.1%</td> <td>29.4%</td> <td>36.6%</td> <td>41.7%</td> <td>52.7%</td> <td>56.1%</td>	20.1%	29.4%	36.6%	41.7%	52.7%	56.1%

Note: Boxed and shaded value is the base case.

23 ADJACENT PROPERTIES

This section is not relevant to this Report.

24 OTHER RELEVANT DATA AND INFORMATION

This section is not relevant to this Report.

25 INTERPRETATION AND CONCLUSIONS

25.1 Introduction

The QPs note the following interpretations and conclusions in their respective areas of expertise, based on the review of data available for this Report.

25.2 Mineral Tenure, Surface Rights, Water Rights, Royalties and Agreements

Information from legal experts support that the tenure held is valid and sufficient to support a declaration of Mineral Resources and Mineral Reserves. Tenure is in two geographic areas, one referred to as the Grassy Mountains claims group, the second the Frost Area claims group. The Grassy Mountain deposit is within the Grassy Mountains claims group.

Paramount's 100% ownership of the Grassy Mountain Project is subject to underlying agreements and royalties.

Seabridge is entitled to a 10% net profits interest (NPI) royalty. Seabridge, at the Report effective date, is the second largest Paramount shareholder and has indicated that it will convert its NPI into equity in Paramount, thus the Seabridge NPI has not been included in the 2020 FS.

Sherry and Yates retain a 1.5% royalty of the gross proceeds for the production of minerals from the patented and unpatented claims and a surrounding ½ mile area of interest. This area covers the Grassy Mountain deposit. There are an additional two royalty obligations in the Project area; however, these are not over claims that host Mineral Resources or Mineral Reserves.

Paramount holds three patented claims over the Grassy Mountain deposit, which provides surface rights for that area. The surrounding surface rights associated with the proposed locations of the Project surface facilities belong to the Federal government and are managed by the Vale District BLM office.

Paramount holds a water right granted by the Oregon Water Resources Department to Calico.

Except for the exploration surface disturbance, primarily related to drilling, and the network of water wells that will need to be reclaimed, there are no known environmental liabilities associated with the Grassy Mountain project.

To the extent known to the QP, there are no other significant factors and risks that may affect access, title, or the right or ability to perform work on the Project that are not discussed in this Report.

25.3 Geology and Mineralization

The Grassy Mountain deposit is an example of a low-sulfidation epithermal deposit.

The understanding of the Grassy Mountain deposit settings, lithologies, mineralization, and the geological, structural, and alteration controls on mineralization is sufficient to support estimation of Mineral Resources and Mineral Reserves.

There is remaining exploration potential in the Project area. The Crabgrass, Bluegrass, North Bluegrass, Ryegrass and Dennis' Folly areas in the Grassy Mountain claims block were recommended for surface work with the goal of defining further exploration drill targets. The CSAMT survey over the Frost Area claims group revealed some resistivity anomalies that warrant consideration for drill testing.

25.4 Exploration, Drilling and Analytical Data Collection in Support of Mineral Resource Estimation

The exploration programs completed to date are appropriate for epithermal-style mineralization.

Sampling methods are acceptable for Mineral Resource estimation.

Sample preparation, analysis and security are generally performed in accordance with exploration best practices and industry standards at the time the information was collected.

The quantity and quality of the logged geological data, collar, and downhole survey data collected in the exploration and infill drill programs are sufficient to support Mineral Resource estimation.

No material factors were identified with the data collection from the drill programs that could significantly affect Mineral Resource estimation.

The sample preparation, analysis, and security practices and are acceptable, meet industry-standard practices at the time they were undertaken, and are sufficient to support Mineral Resource estimation.

QA/QC submission rates met industry-accepted standards at the time of the campaign. The QA/QC programs did not detect any material sample biases in the data reviewed that supports Mineral Resource estimation.

The data verification programs concluded that the data collected from the Project adequately support the geological interpretations and constitute a database of sufficient quality to support the use of the data in Mineral Resource estimation.

25.5 Metallurgical Testwork

Metallurgical testwork and associated analytical procedures were appropriate to the mineralization type, appropriate to establish the optimal processing route, and were performed using samples that are typical of the mineralization styles found within the Grassy Mountain deposit.

Samples selected for testing were representative of the mineralization. Samples were selected from a range of depths within the deposit. Sufficient samples were taken so that tests were performed on sufficient sample mass.

Recovery factors estimated are based on appropriate metallurgical testwork, and are appropriate to the mineralization and the selected process route. Overall plant recoveries for gold are predicted to range from 89.5–94.9% for head grades of 3.3–17.4 g/t (0.096–0.508 oz/ton) Au over the life of mine (LOM). Overall plant recoveries for silver are predicted to range from 62.7–80.4% for head grades of 5.5–17.9 g/t (0.161–0.523 oz/ton) Ag over the LOM.

Mercury is present in sufficient concentration to warrant removal and management, and this step was incorporated into the flowsheet. Arsenic is present in the feed but is not expected to be problematic in processing. No other elements that may cause issues in the process plant or concerns with product marketability were noted.

25.6 Mineral Resource Estimates

The Mineral Resource estimation for the Project conforms to industry-accepted practices, and is reported using the 2014 CIM Definition Standards.

The central higher-grade core of the deposit, which would be critical to the potential economic viability of any mining operation, has predominantly been drilled at spacings of about 30–50 ft. Even at this relatively tight drill density, the highest-grade mineralization (>~0.2 oz Au/ton) cannot be confidently

correlated from drill hole to drill hole in many cases. This high-grade population therefore could not be explicitly modeled. Although care was taken to properly represent the distribution of the high-grade population in estimation, the locations of these high grades in the resource model likely vary from reality as distances from drill data increase. Closely-spaced drilling will therefore be required in any future underground mining operation. Such drilling should be undertaken prior to mining of any particular sector of the deposit, with the data used to update the operation's short-term resource model, as well as to create final stope designs for each mining sector.

There is a total of 14,947 sample intervals in the drill-hole database that have gold assays but no silver analyses. In most of these cases, entire drill holes were not assayed for silver. For example, some of the early Atlas holes and none of the Newmont holes were assayed for silver. A total of 4,720 of the sample intervals lacking silver assays lie within the gold domains that form the basis of the resource estimate, while 19,938 sample intervals used in the resource estimate do have silver analyses. The lower quantity of silver analyses is mitigated by the fact that silver would add very little value relative to gold in any potential mining operation.

Structural zones are interpreted to be one of the principal controls of high-grade mineralization in the central core of the Grassy Mountain deposit. These structural zones are also important from a geotechnical standpoint, as they are characterized by poor rock quality. The geological modeling that supports the current resource estimate includes these fault zones, but additional angled core holes would be useful to better define the extents of the structural zones and thereby aid in refining the geotechnical and high-grade modeling of the deposit.

Although the QP is not expert with respect to any of the following aspects of the Project, the QP is not aware of any unusual environmental, permitting, legal, title, taxation, socio-economic, marketing, political, or other relevant factors not discussed in this Report that could materially affect Mineral Resource estimates as of the effective date of the Report.

25.7 Mineral Reserve Estimates

An underground mining scenario is assumed using mechanized cut-and-fill methods.

The Proven and Probable Mineral Reserves for Grassy Mountain were estimated by first calculating an economic cut-off grade for mining underground stopes, then using the cut-off grade to design stope shapes centered on Measured and Indicated Mineral Resource blocks with gold grades greater than or equal to the cut-off grade.

The calculated gold cut-off grade is 0.10 oz/ton Au. Silver was not included in the cut-off grade calculation due to its relatively small contribution to total economic value.

The economic stope cut-off grade was used in the stope optimization to identify the Measured and Indicated blocks available for consideration to be converted to Mineral Reserves. Measured and Indicated resource blocks with grades less than the economic stope cut-off grade were applied to internal dilution.

A modifying factor of 8% was used for calculating external dilution tons. All Inferred resource blocks or partial blocks within the stopes and all unclassified material within the stopes is considered internal dilution. The tons were accounted for with zero grade.

Mining recovery is estimated to be 97% based on an assumed ore loss of 3%. This is considered appropriate for the highly selective mechanized cut-and-fill mining method selected for the Grassy Mountain deposit and it is based on similar operations in disseminated ore bodies.

The Mineral Reserve estimation for the Project conforms to industry-accepted practices, and is reported using the 2014 CIM Definition Standards.

The QP is not aware of any mining, metallurgical, infrastructure, permitting or other relevant factors not discussed in this Report that could materially affect the Mineral Reserve estimate.

25.8 Mine Plan

25.8.1 Mining Method

The estimated mine life is eight years.

The Grassy Mountain mine will be an underground operation accessed via one decline and a system of internal ramps. The decline will be 15 x 15 ft in dimensions, developed from a portal on surface.

An underground mining scenario is assumed using mechanized cut-and-fill methods, which, following ramp-up, will produce 1,300–1,400 tons/day, four days a week. This mining rate will provide sufficient material for the 750 tons/day mill and processing plant to operate at full capacity for seven days a week. The mining direction will be underhand. The mechanized cut-and-fill method is highly flexible and can achieve high recovery rates in deposits with complex geometries, as is the case at the Grassy Mountain deposit.

Level stations will have a standoff distance from the orebody of approximately 300 ft. There are five stations planned for the mine, accessed off the decline, and each station will access up to five production levels.

The ventilation network was designed to comply with US ventilation standards for underground mines. The planned ventilation will use a push/pull system and will require two exhaust fans on surface. One ventilation raise is included in the design to be used for ventilation and secondary egress.

Cemented rock fill (CRF) will be used for backfill.

Mine operations will be based on the usage of mobile mining equipment suitable for underground mines. Equipment is conventional for mechanized cut-and-fill mining operations.

25.8.2 Geotechnical Considerations

The Grassy Mountain deposit is in a structurally complex, clay-altered, epithermal environment. Rock mass conditions in the infrastructure and production areas vary from Poor to Fair quality with the poorest conditions within major structures that run longitudinally through and bound the deposit. Outside of these fault areas, rock mass conditions are generally Fair. However, localized zones of Poor ground potentially associated with secondary structures or locally elevated alteration intensity are present throughout the planned mining area.

The North and Grassy faults are significant fault structures that pose a risk to the stability of an open stoping method; hence, these areas are considered suitable only for a limited man-entry mining method such as mechanized cut-and-fill, where conditions can be well controlled.

Degradation of Grassy Mountain Formation lithologic units results in difficult mining conditions that can be mitigated through additional ground support. This would result in a higher mining cost with slower advance rates in those areas.

Based on the shallow depth, ground stress is relatively low, and rock damage due to higher mining-induced stress concentrations is only anticipated in high-extraction or sequence closure areas and weaker rock mass areas. However, a reduction in the mining stresses around excavations is likely to adversely affect the stability of large open-span areas. Tensile failure and gravity-induced unraveling are foreseen as the main failure mechanisms.

Ground support design considers industry-standard empirical guidelines and GMS's experience in variable ground conditions. Compromises have been made in the extraction sequence due to the need to balance grade and production profiles, extraction of wide orebody areas, and other geotechnical constraints. Ultimately, some aspects of the sequence may not be geotechnically optimal, and additional analysis or design may be required.

25.9 Recovery Plan

The process plant was designed using conventional, processing unit operations. It will treat 750 tons/d or 34 tons/hour based on an availability of 7,998 hours per annum or 91.3%. The crushing section design is set at 70% availability and the gold room availability is set at 52 weeks per year including two operating days and one smelting day per week. The plant will operate with two shifts per day, 365 days per year, and will produce doré bars.

25.10 Infrastructure

25.10.1 Key Infrastructure

Key Project infrastructure as envisaged in the 2020 FS includes: underground mine, including portal and decline; roads; site main gate and guard house; administration building, training, first aid, change house and car park; process plant e-room; crushing area e-room; control room; reagent storage and building; gold room; assay laboratory and sample preparation area; plant workshop and warehouse; truck shop, warehouse, wash pad; fuel facility, fuel storage and dispensing; water wells; 14.4 kV overland power line; fresh water supply and treatment; raw water tank; TSF; WRSF; and explosives magazine.

25.10.2 Roads and Power

The main access road will use an existing BLM road, which will be widened to support operations.

Power will initially be provided by diesel power generators during the construction period (year 1). A powerline will be built to site in that first year and will deliver approximately 5.3 MW. The generators will remain on site as backup.

25.10.3 Waste Rock Storage and Borrow Pits

Waste rock will be temporarily stored on surface in a lined facility, and will be returned underground as CRF.

Two borrow pits are planned, using contract mining. Borrow material will be used for construction, backfill, and reclamation.

25.10.4 Tailings Storage Facility

The TSF uses conventional designs and assumes construction in three primary stages and zero discharge. The facility envisaged in the 2020 FS, however, will be constructed in only two primary stages (with Stage 1 constructed in two intermediate phases), as only 2.07 Mtons are planned to be delivered to the TSF. The TSF will fill the broad valley immediately west of the Grassy Mountain mine portal and process facilities and require embankments on the north and west sides to impound the tailings. The main embankment will cross the natural drainage on the north side of the TSF, and a secondary embankment will be constructed along the western ridge. The facility will be a 100% geomembrane-lined facility with a continuous, engineered lining system extending across the impoundment basin and the upstream slope of the embankments. The design is capable of storing runoff from tributary areas and direct precipitation on the facility resulting from the 500-year, 24-hour storm event, as well as an allowance for wave run-up due to wind action.

The relevant results and interpretations related to the TSF and waste rock storage facility WRSF designs are based on the data and other information summarized in this Report.

Golder provided a detailed design for the TSF sufficient to contain the tailings projected from the 2020 FS mine production. At this stage of the Project, there is reasonable certainty that the location and design of the TSF and WRSF as presented for this 2020 FS will be used as planned. No significant design changes are likely to be required provided that no material changes in location or design are needed as a result of the on-going local, State, and Federal permitting process.

Provided that actual construction, operation, management, and closure of the TSF do not differ materially from the results and design parameters summarized in this Report, there are no significant risks and uncertainties that could reasonably be expected to affect the reliability or confidence in the TSF design and cost estimates.

If actual activities related to the construction, management, operation, and closure of the TSF do differ materially from the results summarized in this Report, then the reasonably foreseeable impacts of these risks and uncertainties are most likely to be project delays and additional costs. However, any such delays or additional costs may reasonably be expected to be managed in the ordinary course and should not impact overall Project viability.

25.10.5 Water Management

Contact and non-contact surface water will be routed around the plant site. Permanent channels were designed on a 100-year, 24-hour storm event with 9 inches of freeboard, or 500-year, 24-hour storm event without overtopping. Temporary channels were designed on a 25-year, 24-hour storm event with 9 inches of freeboard, or 100-year, 24-hour storm event without overtopping.

25.10.6 Water Supply

Water supply from the raw water production wells and mine dewatering is projected to be sufficient to support the operational demands. Water demands are expected vary seasonally.

25.11 Environmental, Permitting and Social Considerations

Calico has been conducting baseline data collection for nine years for environmental studies required to support the State and Federal permitting process. A total of 22 baseline studies are required by the BLM and one additional study is required by the State. To date all have been completed and filed. Results indicate limited biological and cultural issues, air quality impacts appear to be within State of Oregon standards, traffic and noise issues are present but at low levels, and socioeconomic impacts are positive. Both BLM and DOGAMI have provided comments and request that will be addressed in a new submission.

Closure costs are estimated at \$6.3 million for the purposes of the 2020 FS.

The proposed mining operation will not require either a Federal NPDES from the EPA or US Army Corps of Engineers 404 Dredge and Fill Permit. The Project does not involve a discharge to Waters of the US and nor does it involve construction in wetlands or placement of dredge tailings or fill material into Waters of the US. However, the Project does require a PoO approval from the BLM. Submittal of the Grassy Mountain PoO Application was in September 2017. A revised PoO was submitted to the BLM in February 2020. The BLM has requested additional details and Calico is working on acquiring the information and updating the PoO.

The BLM has stated that the NEPA review process for this Project will be an EIS.

Calico entered into an MOU with the Oregon DOGAMI on November 3, 2014. A new MOU was signed when the Consolidated Permit Application was submitted in November 2019. The MOU provides a mechanism whereby Calico, as the Project proponent, agrees to reimburse DOGAMI and other primary State agencies for their involvement in processing the Consolidated Permit Application for the Grassy Mountain Project when those fees exceed their permit fees. In addition, DOGAMI hired consulting firms to provide expertise that is not available from the staff that the various agencies are involved with during the permitting process.

Calico has filed multiple NOIs that initiate the State permitting process and begin baseline data collection.

Calico prepared and submitted the Division 37 Consolidated Permit Application for the Grassy Mountain Gold Mine in November 2019. DOGAMI finished their completeness review with input from the interagency Technical Review Team. DOGAMI determined that additional information is necessary before further processing of the application.

Social and community impacts have been and are being considered and evaluated for the various PoO amendments performed for the Project in accordance with the NEPA and other Federal laws, and the State of Oregon Socioeconomic Analysis.

25.12 Markets and Contracts

No market studies have been completed. Gold and silver are freely-traded commodities. The doré that will be produced by the mine is considered to be readily marketable.

Metal pricing used in the economic analysis is based on a two-year trailing average, and forecasts \$1,471.59/oz Au and US\$16.64/oz Ag. Based on financial institution and COMEX futures forecasts, there is potential upside for the Project if the elevated gold prices predicted in those forecasts occur during the Project production period

Paramount has no current contracts for property development, mining, concentrating, smelting, refining, transportation, handling, sales and hedging, forward sales contracts or arrangements.

25.13 Capital Cost Estimates

The capital cost estimate has an accuracy of $\pm 15\%$.

Capital costs are estimated at \$97.5 million of initial capital. This figure includes \$10 million of contingency. In addition, there is \$25.6 million of sustaining capital and \$6.3 million in closure costs.

25.14 Operating Cost Estimates

The operating cost estimate has an accuracy of $\pm 15\%$.

The LOM underground mining costs are estimated at \$120.5 million over the LOM, and will average about \$58.23/ton milled over the LOM.

The LOM process operating cost is estimated at \$57.5 million over the LOM, and will average \$27.77/ton milled over the LOM.

The LOM general and administrative (G&A) cost is estimated at \$29.9 million over the LOM, and will average \$14.42/ton milled over the LOM.

25.15 Economic Analysis

An engineering economic model was developed to estimate annual pre-tax and post-tax cash flows and sensitivities of the Project based on a 5% discount rate.

The analysis used the following key inputs:

- Gold price of US\$1,472/oz, silver price of US\$16.64/oz;
- Construction period of 18 months beginning March 1st, 2022;
- All construction costs are capitalized;
- Commercial production starting (effectively) on September 1, 2023;
- LOM of 7.8 years;
- Cost estimates in constant Q3 2020 U.S dollars with no inflation or escalation;
- Capital costs funded with 100% equity (no financing costs assumed);
- All cash flows discounted to the start of construction;
- Metal is assumed to be sold in the same year it is produced;
- No contractual arrangements for refining currently exist;
- Closure cost of \$6.3 million;
- 1.5% royalty, resulting in approximately \$8.1 million in undiscounted royalty payments over the LOM;
- US Federal corporate income tax rate of 21%; Oregon tax rate of 7.6% for net proceeds of more than \$1 million; giving total undiscounted tax payments of \$26.3 million over the LOM.

The pre-tax net present value (NPV) discounted at 5% is \$123.3 million; the internal rate of return (IRR) is 27.9%; and payback period is 3.1 years. On an after-tax basis, the NPV discounted at 5% is \$105.2 million; the IRR is 26%; and the payback period is 3.1 years.

A sensitivity analysis was conducted on the base case pre-tax and after-tax NPV and IRR, using the following variables: gold price, head grades, initial capital cost, operating cost, metallurgical recovery, and discount rate. The analysis showed that the Project is most sensitive to, in order from most to least sensitive: gold price; mill head grade; metallurgical recovery rates; initial capital cost; discount rate; and operating cost.

In the event that Seabridge does not convert its NPI into equity, the NPV would be reduced by \$3.6 million to \$101.5 million from the base case of \$105.2 million.

25.16 Risks and Opportunities

25.16.1 Risks

25.16.1.1 Project Setting

Unlike States such as Nevada and Arizona, Oregon does not have a strong mining background. The Project may encounter a lack of mining skills and expertise at the local level, which could affect Paramount's ability to operate using local labour, until Paramount has trained sufficient local staff to suit Project requirements. There may also be effects on the Project caused by a lack of familiarity with Mine Safety and Health Administration (MSHA) requirements at the local and State levels and at the

local staff operator level, which may in turn lead to safety incidents. Such incidents could result in Project delays and affect the permitting process.

25.16.1.2 Mining

There is a risk that the estimated mining costs may not be achievable if additional support over that contemplated in the 2020 FS is required due to the Poor quality rock mass.

25.16.1.3 Infrastructure

Delays in the proposed access road upgrade may result in delays to the Project schedule.

Delays in the power line installation including the substation upgrade may result in delays to the Project schedule. The Project power requirements are relatively modest, and there is a risk that the selected power provider may not wish to supply the Project. There is a risk that the power costs may be higher than anticipated in the 2020 FS in that instance.

Water supply is envisaged to be partly from groundwater sources. Additional production wells may be required to support operations, which will require permitting. In addition, well productivity may not be as envisaged, which may affect both the volume of water available for operations and the number of wells that must be pumped.

A schedule was developed for TSF construction. Weather-related delays may impact that schedule and cause delays to the Project schedule.

If additional borrow areas are required for construction and reclamation of the TSF that are more distant than contemplated in the 2020 FS, then reclamation construction costs of the TSF will increase as compared to the costs estimated in this Report.

Construction work in Oregon is seasonal. Poor weather during the construction season may result in delays to the Project schedule.

The operations were planned to have a small site footprint. However, this carries a risk during construction, as logistics within a small site footprint become more complicated. Care will need to be taken by the construction management team that Project logistics are carried out safely and economically.

25.16.1.4 Environmental, Permitting and Social

Changes to the permitting environment as envisaged in the 2020 FS may result in Project changes being required by the permitting agencies. Such changes may result in additional capital costs or increases in operating costs.

The State and Federal governments will need to agree on the level of reclamation bonding required for the Project. Currently both levels of government require reclamation bonds to be posted. There is a move to co-ordinate the bonding so only a single bond is required. However, if the two levels of government are not in agreement, this could cause delays in Project permitting, and delays in obtaining the social licence to operate. It may also result in Paramount being required to post additional bonding to that envisaged in the 2020 FS.

If non-governmental organizations object to the Project as envisaged in the 2020 FS, a number of risks may result. These could include additional capital costs or increases in operating costs, delays in Project permitting, and delays in obtaining the social licence to operate.

Four baseline study areas still require update and acceptance by DOGAMI, including groundwater, geochemistry, cultural, and wildlife. If additional data collection is required for these areas, that may result in delays in Project permitting, and delays in obtaining the social licence to operate. There is also potential for restrictions to be placed on any environmental permits that are granted. If any protected flora and fauna are identified in the wildlife surveys, Paramount may be required to develop mitigation plans for the affected species. This could include acquisition of suitable habitat/land to offset proposed disturbances, which would increase Project capital costs.

25.16.1.5 Economic Analysis

The economic analysis is based on taxation and policy considerations at the Report effective date. Any policy or taxation changes will affect the cashflow analysis. Such changes could be either positive or negative, depending on the change.

25.16.1.6 Operational Readiness

Mining is cyclical, and during an up-cycle, it can be difficult for any mining operation to attract quality staff. There is a risk to Paramount if such staff cannot be found to support the Owner's team.

Paramount currently has no active operations. There is a risk that this lack of familiarity with the operational environment, particularly in Oregon, could result in unexpected Project delays or cost increases.

25.16.2 Opportunities

25.16.2.1 Mining

The mine plan and cut-off grades used for the 2020 FS are based on conservative metal prices. There may be upside for the Project if the higher metal pricing seen in late 2020 continues. A higher metal price would potentially result in additional material meeting the cut-off grade criteria and being available to potentially convert to Mineral Reserves, thereby providing additional metal production and potentially, extending the mine life.

25.16.2.2 Infrastructure

The mine plan requires sources of aggregate and borrow materials in support of road construction and CRF. Private sources for gravel construction along the access route may be obtainable. There may also be an opportunity to source borrow material from local sources. This could lead to more simplified permitting for the development of these sources, and it could potentially reduce costs of the gravel for the access-road construction and borrow materials for CRF.

25.16.2.3 Capital and Operating Costs

There may be an opportunity to reduce some of the capital costs envisaged in the 2020 FS, if some equipment or buildings can be purchased second-hand.

The cost of geosynthetic materials may be able to be reduced if these materials are purchased direct from the manufacturer or vendor.

25.17 Conclusions

Based on the assumptions and parameters presented in this Report, the 2020 FS shows positive economics.

26 RECOMMENDATIONS

26.1 Introduction

A single work phase is proposed, set out by discipline area. All items within the work phase can be completed concurrently. The estimated budget to complete the work program is approximately \$943,000.

26.2 Mining

Additional optimization of the mine design and underground production should be undertaken before construction begins. This should include:

- Determination of an optimal gold price. A higher gold price will lower the cut-off grade and bring in more economic material into the mine plan. This is estimated to require a budget of approximately \$25,000 to complete;
- Further analysis of the underground equipment types and sizes to identify possible improvements to the economics and efficiencies. A budget of \$10,000 is recommended to complete this step;
- Analysis of the potential to use a roadheader to improve efficiencies and lower costs. This is estimated to require a budget of approximately \$15,000 to complete; and
- The permitting process may require alternative mine plans with alternative mining methods. If the permitting process requires alternative underground mine plans, then sublevel caving and sublevel shrinkage should be evaluated as alternative underground mining methods. A budget of \$100,000 is recommended to complete this step.

The mining recommendations overall have a completion cost estimate of approximately \$150,000.

26.3 Tailings Storage Facility and Borrow Pits

The proposed closure cover borrow areas should be further investigated to verify and confirm that materials of sufficient quantity and quality are available for reclamation construction of the TSF.

This work is estimated at about \$100,000.

26.4 Hydrology

An additional water well should be drilled and be subject to pumping tests to confirm the water flow available from the water well.

This work is estimated at approximately \$426,000.

26.5 Geotechnical

A geotechnical classification should be used for narrow zones of weakness, both in rock core descriptions and during underground geotechnical mapping. Good options are the fault classifications of Riedmüller et al. (2001) or Fashing and Vanek (2011). This will allow for the differentiation, characterization, and geotechnical classification of clay matrix breccias, faults, faults/veins or other weakness zones.

It is important to identify structural domains since, given the characteristics of the deposit, it is more likely that there will be instabilities associated with wedge fall than instabilities associated with the existing stress state. This was not analyzed in the 2020 FS, due to lack of structural information.

A study should be completed to geotechnically characterize the vein/faults and document strength properties and mean thicknesses.

The seismic hazard study should be updated to provide additional quantification of the seismic risk for the Project area.

The empirical design is based on the median of Q' values, so these designs are valid for half of the cases studied. The empirical design using a lower Q' value standard deviation range should be reviewed to determine the stability condition of all development determine what additional stability measures may be required if designs change due to a more conservative assessment of the Q' values.

A pillar dimensioning and stability analysis is recommended to be completed in order to provide recommendations to the mine design and planning department.

Additional tests should be undertaken to test CRF strength resistance in response to changes in the cement and fly ash percentages in an attempt to reduce the amount of cement that may be required. The 2020 FS tested 5% and 7% cement, but the following should be evaluated:

- 3% cement and 2% fly ash;
- 4% cement and 3% fly ash

A limit equilibrium analysis should be completed to assess the typical failure modes of caving, flexural, sliding and rotational as proposed by Mitchell and Roettger (1989).

Reinforcements should be installed during operations to intersect the vertical joints at an oblique angle to improve the shear resistance. Otherwise, vertically-installed reinforcements may need to be longer than envisaged in the 2020 FS to penetrate beyond the potential height of the stable arch.

Wall response in permanent and temporary excavations must be measured during excavation to develop a better understanding of the interaction between bolts, cable bolts and the rock mass.

A geotechnical risk model is recommended to economically quantify the risk of instabilities and prepare alternative plans to ensure on time ore delivery.

An update should be undertaken to the reinforcement and support numerical analysis to support the shotcrete assumptions.

The three-dimensional numerical analysis of the timeframes assumed for excavation and backfill should be conducted on a month-by-month basis. This monthly examination should evaluate displacement velocity against the stand-up time requirements for the excavations. Work should include:

- The performance of CRF cured for 14 days;
- The excavation sequence criteria for drifts located beside backfilled drifts;
- The displacements and maximum shear strengths for the local excavation–backfill sequence;
- The maximum cover up of plastic zones due to the excavation backfill sequence.

- Evaluate potential mine plan updates that may result from decreasing the total covering of the plastic zone generated around the excavations, the maximum shear strengths and pillar displacements, and generate a sequence that is based on the recommended backfill cure times.

Rib pillars that are lower than three drifts wide in drift excavations under rock mass environments (i.e. that are not under CRF) should be avoided, due to the risk of high stress concentrations in the pillar and therefore local instabilities.

The safety factor should be calculated as part of the numerical model update, to provide information on the response of the rock mass to the induced stress through the excavation–backfill process.

Paramount should prepare a detailed monitoring plan for underground operations. The plan should include:

- Geotechnical inspections and permanent ground control during the operation are strongly recommended;
- Installation of vibrating wire extensometers to measure displacements along time in sectors considered critical as the permanent infrastructure;
- A measurement program for in-situ stress parameter. This will indicate those sectors subject to large compression or relaxation changes due to stress redistribution during drift mining; and
- Preparation of procedures for a systematic convergence measurement and stress changes measurement.

The plan also should consider the surface displacements monitoring according to:

- Visual inspection;
- Cross-crack measurements, either manual or by wireline extensometer;
- Survey monitoring; and mainly; and
- Satellite imaging subsidence monitoring (InSAR).

The application of pre-splitting blasting process or smooth blasting processes should be investigated to reduce blast damage and achieve blast design.

Blasting should be avoided beside drifts that have recently been backfilled or where the CRF still undergoing the curing process (28 days) to prevent CRF damage and affect the CRF stability in undercut operations.

A vibrations study is recommended to define the maximum size of blasting to reduce the risk of underground collapses or instabilities.

The effect of blasting on the weak rock mass should be quantified using techniques proposed by Caceres (2011) related to peak particle velocity and scaled distance as a function of rock mass quality.

A workshop should be organized to review the mine plan and geotechnical assumptions to optimize the mine plan so as to ensure stability between drifts and mine levels.

For the portal excavation, a 2D numerical model should be completed to assess stability and deformation during the excavation process. The model should consider the updated geotechnical characterization and assess these conditions at different excavation stages.

The total geotechnical program is estimated to cost approximately \$227,000 to complete, broken out as follows:

- Vein/faults geotechnical characterization: \$20,000 of study costs and \$15,000 of laboratory costs;
- Seismic hazard study update: \$40,000;
- Design stability update and pillar assessment: \$5,500;
- CRF test update: 50,000 of study costs and \$100,000 of laboratory costs;
- CRF limit equilibrium assessment: \$7,000;
- Geotechnical risk model: \$9,500;
- Support numerical analysis update: \$7,500;
- 3D stability numerical analysis update: \$25,000;
- Detailed ground monitoring plan: \$8,500;
- Effect blasting assessment: \$7,000;
- Numerical model for portal excavation sequence: \$7,000;
- Mining and geotechnical workshop: \$20,000;
- Other studies: \$20,000.

26.6 Resource Model

The current lithologic model has not been fully rectified three-dimensionally. To support an active mining operation, a fully rectified lithological model is recommended.

This work is estimated to cost about \$40,000.

27 REFERENCES

- Barton, N., 2002: Some New Q-Value Correlations to Assist in Site Characterization and Tunnel Design: *Int. J Rock Mech and Min Sci*, (39), pp. 185–216.
- Barton, N., 2008: Rock Engineering for a Drill and Blast and TBM Tunneling, and Important Aspects of Rock Joint and Rock Mass Behavior: Short course presented 26–27 June, 2008, Santiago, Chile.
- Barton, N.; Lien, R. and Lunde, J., 1974: Engineering Classification of Rock Masses for the Design of Tunnel Support: *Rock Mechanics*, Vol. 6, N° 4.
- Baxter, K., 2020: Grassy Mountain Gold and Silver Project Mine Dewatering Hydrogeologic Assessment: report prepared by Lorax Environmental Services, March 2020, Project Number A547-1.
- Bieniawski, Z. T., 1976: Rock Mass Classification in Rock Engineering: *in* Z. T. Bieniawski, ed. *Proceedings of the Symposium on Exploration for Rock Engineering*, Vol. 1. Johannesburg, 1–5 November 1976. Cape Town: A.A. Balkema, pp. 97–106.
- Bieniawski, Z. T., 1989: *Engineering Rock Mass Classifications*: New York: John Wiley & Sons, first edition.
- Bieniawski, Z. T., 1990: *Tunnel Design by Rock Mass Classifications*: Washington: US Army Corps of Engineers, first edition.
- BMO Capital Markets, 2020: *Material Precious Metal & Minerals*: September 2020.
- Brady, B.H. & Brown, E.T., 2004: *Rock Mechanics for Underground Mining*: Kluwer Academic, third edition.
- Brown, J.J., Malhotra, D., and Black, Z., 2012: NI 43-101 Technical Report on Resources, Grassy Mountain Gold Project, Malheur County, Oregon: report prepared by Gustavson Associates for Calico Resources Corp., effective date September 26, 2012.
- Buchanan, L.J., 1981: Precious Metal Deposits Associated with Volcanic Environments in the Southwest: *in* Dickinson, W.R., and Payne, W.D., eds, *Relations of Tectonics to Ore Deposits in the Southern Cordillera*: *Arizona Geological Society Digest*, v. 14, pp. 237–261.
- Caceres, C.A., 2011: Quantifying the Effect of Rock Mass Quality on Peak Particle Velocity for Underground Drift Development: PhD thesis, University of British Columbia.
- Canadian Securities Administrators (CSA), 2011: National Instrument 43-101, Standards of Disclosure for Mineral Projects, Canadian Securities Administrators.
- Cantor Fitzgerald, 2020: *Precious Metals & Mining Macro*: March 2020.
- Carter, T. G., 2000: An Update on the Scaled Span Concept for Dimensioning Surface Crown Pillar for New or Abandoned Mine Workings: 4th North American Rock Mechanics Symposium, 31 July–3 August, Seattle, Washington.

- Clark, A., Thompson, J., and Scanlon, T., 2018: Grassy Mountain Pre-Feasibility Dewatering Estimates RE: (1294.0010 - Task 6): Memorandum prepared by SPF Water Engineering for Paramount Gold Nevada, January 2018, 129 p.
- Cordova, M., Saw, H., and Villaescusa, E., 2015: Laboratory Testing of Cemented Rock Fill for Open Stope Support.
- Cummings, M.L., 1991: Relationships Among Volcaniclastic Sedimentation, Volcanism, Faulting, and Hydrothermal Activity West of Lake Owyhee, Malheur County, Oregon: *in* Geology and Ore Deposits of the Great Basin: Geological Society of Nevada, Symposium Proceedings, v2, pp. 111–132.
- Erwin, T.P., 2017: Mineral Status Report for the Grassy Mountain Project: Report prepared for Paramount Gold Nevada Corp. by Erwin & Thompson, LLP, Reno, Nevada, 23 p.
- Fashing, F. and Vanek, R., 2011: Engineering Geological Characterisation of Fault Rocks and Fault Zones: Geomechanics and Tunnelling, 4(3), pp. 181–194.
- French, G.M., 1998: Possible Differences Between Tombstone and the Atlas and Newmont Drilling: internal Atlas Precious Metals report, in Tombstone Exploration memorandum, 1 p.
- Golden Sunlight Mines, 1991: Grassy Mountain Metallurgical Studies: May 1991.
- Golder, 2016a: Collection of Geotechnical Data from Drill Core at Grassy Mountain: Field procedure manual, Lake Oswego, Oregon prepared by Golder Associates.
- Golder, 2016b: Grassy Mountain Project – Tailings Storage Facility, Siting and Trade-Off Study, Malheur County, Oregon: Report prepared for Paramount Nevada by Golder Associates Inc. December 9, 2016.
- Golder, 2018a: Paramount Gold Nevada – Grassy Mountain Project, Geotechnical Data Collection Factual Report: Report prepared for Paramount Gold Nevada Corp. by Golder Associates Inc., March, 2018, 281 p.
- Golder, 2018b. Report Pre-Feasibility Design Tailings Storage Facility Grassy Mountain Project: Report prepared by Golder Associates Inc., June 29, 2018, 1633241.36.R.REV0.
- Golder, 2019a: Grassy Mountain Project – Hydrology and Stormwater Diversion Recommendations for the Process and Portal Pads. Technical memorandum prepared for Ausenco Minerals and Metals by Golder Associates Inc. Draft, June 7, 2019.
- Golder, 2019b: Detailed Design, Tailings Storage Facility and Waste Rock Dump, Grassy Mountain Mine, Malheur County, Oregon: Report prepared for Calico Resources USA Corp. by Golder Associates Inc., November 6, 2019.
- Golder, 2019c: Stormwater Pollution Control Plan, Grassy Mountain Mine, Malheur County, Oregon. Prepared for Calico Resources USA Corp. by Golder Associates inc. November 6, 2019.
- Golder, 2020: Rock Mechanics Laboratory Testing Results (Grassy Mountain Project), Reno, Nevada.
- Gonzalez de Vallejo, L., 2004: Ingeniería Geológica: Pearson Educación, Madrid.
- Gonzalez de Vallejo, L., Ferrer, M., Ortuño, L., Oteo, C., 2002: Ingeniería Geológica, Madrid, España.
- Goodman, R., 1989: Introduction to Rock Mechanics: John Wiley & Sons, New York, second edition.

- Gustin, M.M., Dyer, T.L., MacMahon, C., Caro, B., Raponi, T.R., and Baldwin, D., 2018: Preliminary Feasibility Study and Technical Report for the Grassy Mountain Gold and Silver Project, Malheur County, Oregon, USA: report prepared by Mine Development Associates, Golder Associates and Ausenco Canada Inc. for Paramount Gold Nevada Corp., effective date 21 May, 2018.
- Hazen Research Inc., 1990: Grassy Mountain Metallurgical Studies: March, 1990.
- Hazen Research Inc., 1991: Gravity Concentrations Studies on the Grassy Mountain Gold Ore, July 1991.
- Hoek, E.; Kaiser, P. and Bawden, W., 1995: Support for Underground Excavations in Hard Rock: A. A. Balkema.
- Hulse, D.E., Brown, J.J., and Malhotra, D., 2012: NI 43-101 Technical Report on Resources, Grassy Mountain Gold Project, Malheur County, Oregon: report prepared by Gustavson Associates for Calico Resources Corp., effective date March 1, 2012.
- Itasca, 2012: FLAC3D (Fast Lagrangian Analysis of Continua in 3 Dimensions), 2010: v5.0.
- Jory, J.C., 1993: Grassy Mountain Development Geology 1993 Year-End Report: internal Newmont Exploration Limited draft memorandum, December 1993, 9 p. plus figures.
- Kelly, J.M., 1988: Discovery History of the Grassy Mountain Deposit: unpublished inter-office correspondence of Atlas Precious Metals Inc., September 1988, 4 p.
- Laubscher D. H. and Jakubec J., 2001: The MRMR Rock Mass Classification for Jointed Rock Masses: *in* W. A. Hustrulid & R. L. Bullock eds. *Underground Mining Methods: Engineering Fundamentals and International Case Studies*. New York, Society of Mining Engineers, pp. 474–481.
- Laubscher, D. H., 1990: A Geomechanics Classification System for the Rating of Rock Mass in Mine Design: *Journal of the South African Institute of Mining and Metallurgy*, 90(10), pp. 257–273.
- Lechner, M.J., 2007: Grassy Mountain Technical Report, Malheur County, Oregon: NI 43-101 Technical Report: Report prepared for Seabridge Gold Inc., effective date April 27, 2007
- Lechner, M.J., 2011: Grassy Mountain NI 43-101 Technical Report, Malheur County, Oregon: Report prepared for Calico Resources Corp., effective date June 6, 2011;
- MacMahon, C., Browne, R., and Barton, M., 2018: Draft Report Pre-Feasibility Design Tailings Storage Facility Grassy Mountain Project: Report prepared by Golder Associates Inc., June 2018, 1633241.36.R.REVA, 30 p. plus appendices.
- Mathews, 1981: Stability Graph Method: *SME Mining Engineering Handbook*, Third Edition, pp. 362–363.
- McClelland Laboratories Inc., 2020: Report on Milling/ Cyanidation Testing – Grassy Mountain Composites MLI Job No. 4551, August 13, 2020.
- MetaRock Laboratories, 2020: Rock Mechanics Testing Report for - CRF Testing. Houston, Texas.
- Mitchell, R.J. and Roettger, J.J., 1989: Analysis and Modelling of Sill Pillars: *in* *Innovations in Mining Backfill Technology*, Balkema, Rotterdam, pp 53–62.

- Newmont Exploration Inc., 1993: Grassy Mountain Metallurgical Test Results: December, 1993.
- Nicholas, D.E., 1981: Method Selection – A Numerical Approach; Design and Operation of Caving and Sublevel Stopping Mines: SME-AIME, New York.
- Palmström, A., 1995: RMI - A Rock Mass Characterization System for Rock Engineering Purposes: PhD thesis, University of Oslo.
- Pakalnis, R.; Caceres, C., Clapp, K., and Morin, M., 2005: Design Spans – Underhand and Fill Mining.
- Read J., and Stacey P., 2009: Guidelines for Open Pit Slope Design.
- Resource Development Inc. (RDI), 2012: Review of Metallurgical Studies for the Grassy Mountain Project: January, 2012.
- Resource Development Inc., (RDI) 2015: Metallurgical Testing of Grassy Mountain Project, Malheur County Oregon: March 2015.
- Riedmüller, G., Brosch, F. J., Klima, K. and Medley, E. W., 2001: Engineering geological Characterization of Brittle Faults and Classification of Fault Rocks: Felsbau, 19(4), pp. 13–19.
- Rocscience, 2020: RS2 v10.012. 2D Finite Element Program for Rock and Soil Applications.
- Rytuba, J.J., and McKee, E.H., 1984: Peralkaline Ash Flow Tuffs and Calderas of the McDermitt Volcanic Field, Southeast Oregon and North Central Nevada: Journal of Geophysical Research v. 89; doi: 10.1029/JB080i010p08616. issn: 0148-0227.
- Rytuba, J.J., and VanderMuelen, D.B., 1991: Hot-Spring Precious Metal Systems in the Lake Owyhee Volcanic Field, Oregon-Idaho: *in* Geology and Ore Deposits of the Great Basin: Geological Society of Nevada, Symposium Proceedings, v2, pp. 1085–1096.
- Saw, N., De Vries, R., Hassel, R., and Villaescusa, E., 2017: Optimization of Cemented Rockfill Strength for Open Stope Support.
- SGS, 2018: An Investigation into Metallurgical Testing of samples from the Grassy Mountain Gold Project (Project 15944-001), March 2018.
- SGS, 2020a: An Investigation into Comminution and Metallurgical testing on Samples from the Grassy Mountain Gold Project, Project Number 15944-02 – Final Report; June 23, 2020
- SGS, 2020b: An Investigation by High Definition Mineralogy into One Composite Sample from Grassy Mountain Mine, Project Number 15944-02 – Final Report, September 18, 2020
- Siems, P.L., 1990: Grassy Mountain Alteration and Geochemistry Report: unpublished internal report prepared for Atlas Precious Metals Corporation.
- Sillitoe, R.H., 1993: Epithermal Models: Genetic Types, Geometrical Controls and Shallow Features: *in* Kirkham, R.V., Sinclair, W.D., Thorpe, R.I., and Duke, J.M. (eds.), Mineral Deposit Modeling, Geological Association of Canada Special Paper, n. 40, pp. 403–417.
- Steele, G.L., 1990: Grassy Mountain Rock Density: internal Atlas Precious Metals, Inc. memorandum, 2 p.

- Szwedzicki, T., 2003: Rock Mass Behavior Prior to Failure: Int. J Rock Mech and Min Sci, (40), pp. 573–584.
- Villaescusa, E., 2014: Geotechnical Design for Sublevel Open Stoping.
- Weiss, S.I., 2017: Summary Report on Drilling Targets for Augmenting Mill Feed, Grassy Mountain Gold Project, Malheur County, Oregon: unpublished report prepared for Paramount Gold Nevada Corp., June, 2020, 20 p.
- Wilson, S.E., Pennstrom, W.J. Jr., Batman, S.B., and Black, Z.J., 2015: Amended Preliminary Economic Assessment, Calico Resources Corp., Grassy Mountain Project, Malheur County, Oregon, USA: report prepared by Metal Mining Consultants Inc. for Calico Resources Corp., effective date 13 January 2015, amended 9 July, 2015.
- Wright, J.L., 2012: Grassy Mountain Property CSAMT Survey GIS Compilation: unpublished report prepared for Calico Resources Corp., February 2012, 48 p., plus data files on CD.

Appendix A: Claims List

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
36-2001-0141	Poison Springs 24	84-121773	Patented	5/4/1984	Calico Resources	Grassy	36-2001-0141	20.661
36-2001-0141	Poison Springs 25	84-121774	Patented	5/3/1984	Calico Resources	Grassy	36-2001-0141	20.661
36-2001-0141	Poison Springs 35	84-121775	Patented	4/5/1985	Calico Resources	Grassy	36-2001-0141	20.661
ORMC106700	Winter Claim 33	88-20087	LODE	08/01/1988	Cryla	Grassy		20.661
ORMC155919	Winter #1	2001-1031	LODE	02/18/2001	Cryla	Grassy		20.661
ORMC155920	Winter #2	2001-1032	LODE	02/18/2001	Cryla	Grassy		20.661
ORMC155921	Winter #3	2001-1033	LODE	02/18/2001	Cryla	Grassy		20.661
ORMC155922	Winter #4	2001-1034	LODE	02/18/2001	Cryla	Grassy		20.661
ORMC155923	Winter #5	2001-1035	LODE	02/18/2001	Cryla	Grassy		20.661
ORMC155924	Winter #6	2001-1036	LODE	02/18/2001	Cryla	Grassy		20.661
ORMC155925	Winter #7	2001-1037	LODE	02/18/2001	Cryla	Grassy		20.661
ORMC155926	Winter #8	2001-1038	LODE	02/18/2001	Cryla	Grassy		20.661
ORMC158876	Cryla #1	2004-2068	LODE	03/13/2004	Cryla	Grassy		20.661
ORMC158877	Cryla #2	2004-2069	LODE	03/13/2004	Cryla	Grassy		20.661
ORMC158878	Cryla #3	2004-2070	LODE	03/13/2004	Cryla	Grassy		20.661
ORMC158879	Cryla #4	2004-2071	LODE	03/13/2004	Cryla	Grassy		20.661
ORMC158880	Cryla #5	2004-2072	LODE	03/13/2004	Cryla	Grassy		20.661
ORMC158881	Cryla #6	2004-2073	LODE	03/13/2004	Cryla	Grassy		20.661
ORMC158882	Cryla #7	2004-2074	LODE	03/13/2004	Cryla	Grassy		20.661
ORMC158883	Cryla #8	2004-2075	LODE	03/13/2004	Cryla	Grassy		20.661
ORMC164789	Lucky Lucy #1	2009-3235	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC164790	Lucky Lucy #2	2009-3236	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC164791	Lucky Lucy #3	2009-3237	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC164792	Lucky Lucy #4	2009-3238	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC164793	Lucky Lucy #5	2009-3239	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC164794	Lucky Lucy #6	2009-3240	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC164795	Lucky Lucy #7	2009-3241	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC164796	Lucky Lucy #8	2009-3242	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC164797	Lucky Lucy #9	2009-3243	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC164798	Lucky Lucy #10	2009-3244	LODE	04/12/2009	Cryla	Grassy		20.661
ORMC76751	Winter Claim 32	84-122580	LODE	07/10/1984	Cryla	Grassy		20.661
ORMC174746	Frost 1	2018-0445	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174747	Frost 2	2018-0446	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174748	Frost 3	2018-0447	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174749	Frost 4	2018-0448	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174750	Frost 5	2018-0449	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174751	Frost 6	2018-0450	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174752	Frost 7	2018-0451	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174753	Frost 9	2018-0452	LODE	01/05/2018	Nevada Select	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC174754	Frost 10	2018-0453	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174755	Frost 11	2018-0454	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174756	Frost 12	2018-0455	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174757	FZ 1	2018-0456	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174758	FZ 2	2018-0457	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174759	FZ 3	2018-0458	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174760	FZ 4	2018-0459	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174761	FZ 5	2018-0460	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174762	FZ 6	2018-0461	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174763	FZ 7	2018-0462	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174764	FZ 8	2018-0463	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174765	FZ 9	2018-0464	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174766	FZ 10	2018-0465	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174767	FZ 11	2018-0466	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174768	FZ 12	2018-0467	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174769	FZ 13	2018-0468	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174770	FZ 14	2018-0469	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174771	FZ 15	2018-0470	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174772	FZ 16	2018-0471	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174773	FZ 17	2018-0472	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174774	FZ 21	2018-0473	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174775	FZ 22	2018-0474	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174776	FZ 23	2018-0475	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174777	FZ 24	2018-0476	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174778	FZ 25	2018-0477	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174779	FZ 26	2018-0478	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174780	FZ 27	2018-0479	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174781	FZ 28	2018-0480	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174782	FZ 29	2018-0481	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174783	FZ 30	2018-0482	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174784	FZ 31	2018-0483	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174785	FZ 32	2018-0484	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174786	FZ 33	2018-0485	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174787	FZ 34	2018-0486	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174788	FZ 35	2018-0487	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC174789	FZ 36	2018-0488	LODE	01/05/2018	Nevada Select	Grassy		20.661
ORMC127904	Poison Springs 16A	90-1362	LODE	01/28/1990	Calico Resources	Grassy		20.661
ORMC127905	Poison Springs 17A	90-1363	LODE	01/28/1990	Calico Resources	Grassy		20.661
ORMC174063	PSR 1	2017-2056	LODE	03/30/2017	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC174064	PSR 2	2017-2057	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174065	PSR 3	2017-2058	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174066	PSR 4	2017-2059	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174067	PSR 5	2017-2060	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174068	PSR 6	2017-2061	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC74965	Poison Springs #1	84-121750	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74966	Poison Springs #2	84-121751	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74967	Poison Springs #3	84-121752	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74968	Poison Springs #4	84-121753	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74969	Poison Springs #5	84-121754	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74970	Poison Springs #6	84-121755	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74971	Poison Springs #7	84-121756	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74972	Poison Springs #8	84-121757	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74973	Poison Springs #9	84-121758	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74974	Poison Springs #10	84-121759	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74975	Poison Springs #11	84-121760	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74976	Poison Springs #12	84-121761	LODE	05/01/1984	Calico Resources	Grassy		20.661
ORMC74977	Poison Springs #13	84-121762	LODE	05/02/1984	Calico Resources	Grassy		20.661
ORMC74978	Poison Springs #14	84-121763	LODE	05/02/1984	Calico Resources	Grassy		20.661
ORMC74979	Poison Springs #15	84-121764	LODE	05/02/1984	Calico Resources	Grassy		20.661
ORMC74980	Poison Springs #16	90-1364	LODE	05/02/1984	Calico Resources	Grassy		20.661
ORMC74981	Poison Springs #17	90-1365	LODE	05/02/1984	Calico Resources	Grassy		20.661
ORMC74982	Poison Springs #18	84-121767	LODE	05/03/1984	Calico Resources	Grassy		20.661
ORMC74983	Poison Springs #19	90-6119	LODE	05/03/1984	Calico Resources	Grassy		20.661
ORMC74984	Poison Springs #20	90-6120	LODE	05/03/1984	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC74985	Poison Springs #21	90-6121	LODE	05/03/1984	Calico Resources	Grassy		20.661
ORMC74986	Poison Springs #22	84-121771	LODE	05/03/1984	Calico Resources	Grassy		20.661
ORMC74987	Poison Springs #23	88-22375	LODE	05/03/1984	Calico Resources	Grassy		20.661
ORMC74990	Poison Springs #26	84-121775	LODE	05/25/1984	Calico Resources	Grassy		20.661
ORMC74991	Poison Springs #27	84-121776	LODE	05/24/1984	Calico Resources	Grassy		20.661
ORMC74992	Poison Springs #28	84-121777	LODE	05/24/1984	Calico Resources	Grassy		20.661
ORMC74996	Poison Springs #32	84-121781	LODE	05/25/1984	Calico Resources	Grassy		20.661
ORMC82455	Poison Springs #36	88-22384	LODE	04/05/1985	Calico Resources	Grassy		20.661
ORMC82456	Poison Springs #37	90-6130	LODE	04/05/1985	Calico Resources	Grassy		20.661
ORMC104797	Frog #1	88-18804	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104798	Frog #2	88-18805	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104801	Frog #5	88-18808	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104803	Frog #7	88-18809	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104805	Frog #9	88-18811	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104807	Frog #11	88-18813	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104812	Frog #16	88-18819	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104814	Frog #18	88-18821	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104815	Frog #19	88-18822	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104816	Frog #20	88-18823	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104817	Frog #21	88-18824	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104818	Frog #22	88-18825	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104819	Frog #23	88-18826	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104820	Frog #24	88-18827	LODE	05/06/1988	Calico Resources	Grassy		20.661
ORMC104821	Frog #25	88-18828	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104822	Frog #26	88-18829	LODE	05/07/1988	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC104823	Frog #27	88-18830	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104824	Frog #28	88-18831	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104825	Frog #29	88-18832	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104826	Frog #30	88-18833	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104827	Frog #31	88-18834	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104828	Frog #32	88-18835	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104829	Frog #33	88-18836	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104830	Frog #34	88-18837	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104831	Frog #35	90-3396	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104832	Frog #36	88-18839	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104833	Frog #37	88-18840	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104834	Frog #38	88-18841	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104835	Frog #39	88-18842	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104836	Frog #40	88-18843	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104837	Frog #41	88-18844	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104838	Frog #42	88-18845	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104839	Frog #46	88-18846	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104840	Frog #47	88-18847	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104841	Frog #48	88-18848	LODE	05/07/1988	Calico Resources	Grassy		20.661
ORMC104878	Frog #85	90-1366	LODE	05/08/1988	Calico Resources	Grassy		20.661
ORMC104879	Frog #86	90-1367	LODE	05/08/1988	Calico Resources	Grassy		20.661
ORMC104880	Frog #87	90-1368	LODE	05/08/1988	Calico Resources	Grassy		20.661
ORMC104881	Frog #88	90-1369	LODE	05/08/1988	Calico Resources	Grassy		20.661
ORMC104882	Frog #89	90-1370	LODE	05/08/1988	Calico Resources	Grassy		20.661
ORMC104883	Frog #90	90-1371	LODE	05/08/1988	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC104884	Frog #91	90-1372	LODE	05/08/1988	Calico Resources	Grassy		20.661
ORMC104885	Frog #92	90-1373	LODE	05/08/1988	Calico Resources	Grassy		20.661
ORMC104886	Frog #93	88-18893	LODE	05/08/1988	Calico Resources	Grassy		20.661
ORMC104887	Frog #94	88-18894	LODE	05/08/1988	Calico Resources	Grassy		20.661
ORMC104889	Frog #96	88-18896	LODE	05/17/1988	Calico Resources	Grassy		20.661
ORMC104891	Frog #98	88-18898	LODE	05/17/1988	Calico Resources	Grassy		20.661
ORMC104900	Frog #107	88-18907	LODE	05/20/1988	Calico Resources	Grassy		20.661
ORMC104901	Frog #108	88-18908	LODE	05/20/1988	Calico Resources	Grassy		20.661
ORMC104902	Frog #109	88-18909	LODE	05/20/1988	Calico Resources	Grassy		20.661
ORMC104903	Frog #110	88-18910	LODE	05/20/1988	Calico Resources	Grassy		20.661
ORMC104904	Frog #111	88-18911	LODE	05/20/1988	Calico Resources	Grassy		20.661
ORMC104905	Frog #112	88-18912	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104906	Frog #113	88-18913	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104926	Frog #133	88-18933	LODE	05/20/1988	Calico Resources	Grassy		20.661
ORMC104927	Frog #134	88-18934	LODE	05/20/1988	Calico Resources	Grassy		20.661
ORMC104928	Frog #135	88-18935	LODE	05/20/1988	Calico Resources	Grassy		20.661
ORMC104929	Frog #136	88-18936	LODE	05/20/1988	Calico Resources	Grassy		20.661
ORMC104940	Frog #147	88-18947	LODE	05/22/1988	Calico Resources	Grassy		20.661
ORMC104941	Frog #148	88-18948	LODE	05/22/1988	Calico Resources	Grassy		20.661
ORMC104942	Frog #149	88-18949	LODE	05/22/1988	Calico Resources	Grassy		20.661
ORMC104943	Frog #150	88-18950	LODE	05/22/1988	Calico Resources	Grassy		20.661
ORMC104960	Frog #167	88-18967	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104961	Frog #168	88-18968	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104962	Frog #169	88-18969	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104963	Frog #170	88-18970	LODE	05/19/1988	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC104964	Frog #171	88-18971	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104965	Frog #172	88-18972	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104966	Frog #173	88-18973	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104967	Frog #174	88-18974	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104968	Frog #175	88-18975	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104969	Frog #176	88-18976	LODE	05/19/1988	Calico Resources	Grassy		20.661
ORMC104988	Frog #195	88-18995	LODE	05/22/1988	Calico Resources	Grassy		20.661
ORMC104989	Frog #196	88-18996	LODE	05/22/1988	Calico Resources	Grassy		20.661
ORMC104990	Frog #197	88-18997	LODE	05/22/1988	Calico Resources	Grassy		20.661
ORMC104991	Frog #198	88-18998	LODE	05/21/1988	Calico Resources	Grassy		20.661
ORMC105000	Frog #207	88-19007	LODE	05/29/1988	Calico Resources	Grassy		20.661
ORMC105001	Frog #208	88-19008	LODE	05/29/1988	Calico Resources	Grassy		20.661
ORMC105002	Frog #209	88-19009	LODE	05/29/1988	Calico Resources	Grassy		20.661
ORMC105003	Frog #210	88-19010	LODE	05/24/1988	Calico Resources	Grassy		20.661
ORMC105004	Frog #211	88-19011	LODE	05/27/1988	Calico Resources	Grassy		20.661
ORMC105005	Frog #212	88-19012	LODE	05/27/1988	Calico Resources	Grassy		20.661
ORMC105006	Frog #213	88-19013	LODE	05/27/1988	Calico Resources	Grassy		20.661
ORMC105007	Frog #214	88-19014	LODE	05/27/1988	Calico Resources	Grassy		20.661
ORMC105008	Frog #215	88-19015	LODE	05/27/1988	Calico Resources	Grassy		20.661
ORMC105009	Frog #216	88-19016	LODE	05/27/1988	Calico Resources	Grassy		20.661
ORMC105017	Frog #224	88-19024	LODE	05/26/1988	Calico Resources	Grassy		20.661
ORMC105019	Frog #226	88-19026	LODE	05/26/1988	Calico Resources	Grassy		20.661
ORMC105021	Frog #228	88-19028	LODE	05/26/1988	Calico Resources	Grassy		20.661
ORMC105023	Frog #230	88-19030	LODE	05/26/1988	Calico Resources	Grassy		20.661
ORMC105025	Frog #232	88-19032	LODE	05/26/1988	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC105913	Frog #252	88-19861	LODE	07/21/1988	Calico Resources	Grassy		20.661
ORMC107597	Frog #649	88-21299	LODE	08/17/1988	Calico Resources	Grassy		20.661
ORMC107598	Frog #650	88-21300	LODE	08/17/1988	Calico Resources	Grassy		20.661
ORMC107599	Frog #651	88-21301	LODE	08/17/1988	Calico Resources	Grassy		20.661
ORMC107600	Frog #652	88-21302	LODE	08/17/1988	Calico Resources	Grassy		20.661
ORMC107703	Frog #755	88-21405	LODE	08/23/1988	Calico Resources	Grassy		20.661
ORMC107704	Frog #756	88-21406	LODE	08/23/1988	Calico Resources	Grassy		20.661
ORMC108077	Don #1	88-22025	MILLSITE	09/28/1988	Calico Resources	Grassy		5
ORMC108078	Don #2	88-22026	MILLSITE	09/28/1988	Calico Resources	Grassy		5
ORMC108079	Don #3	88-22027	MILLSITE	09/28/1988	Calico Resources	Grassy		5
ORMC108080	Don #4	88-22028	MILLSITE	09/28/1988	Calico Resources	Grassy		5
ORMC108081	Don #5	88-22029	MILLSITE	09/28/1988	Calico Resources	Grassy		5
ORMC108082	Don #6	88-22030	MILLSITE	09/28/1988	Calico Resources	Grassy		5
ORMC108083	Don #7	88-22031	MILLSITE	09/28/1988	Calico Resources	Grassy		5
ORMC108084	Don #8	88-22032	MILLSITE	09/28/1988	Calico Resources	Grassy		5
ORMC108085	Don #9	88-22033	MILLSITE	09/28/1988	Calico Resources	Grassy		5
ORMC108086	Frog #10A	88-22228	LODE	09/28/1988	Calico Resources	Grassy		20.661
ORMC108087	Frog #25A	88-22229	LODE	09/27/1988	Calico Resources	Grassy		20.661
ORMC108088	Frog #26A	88-22230	LODE	09/27/1988	Calico Resources	Grassy		20.661
ORMC108089	Frog #35A	88-22231	LODE	09/27/1988	Calico Resources	Grassy		20.661
ORMC108090	Frog #46A	88-22232	LODE	09/27/1988	Calico Resources	Grassy		20.661
ORMC108091	Frog #46B	88-22233	LODE	09/27/1988	Calico Resources	Grassy		20.661
ORMC125178	Frog #151	89-38517	LODE	10/04/1989	Calico Resources	Grassy		20.661
ORMC126210	Frog #3	89-39554	LODE	10/29/1989	Calico Resources	Grassy		20.661
ORMC126212	Frog #1274	89-39556	LODE	10/27/1989	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC126213	Frog #1275	89-39557	LODE	10/27/1989	Calico Resources	Grassy		20.661
ORMC126215	Frog #1277	89-39559	LODE	10/27/1989	Calico Resources	Grassy		20.661
ORMC146318	Poison Spring 1A	93-6060	LODE	07/19/1993	Calico Resources	Grassy		20.661
ORMC146319	Poison Spring 3A	93-6061	LODE	07/19/1993	Calico Resources	Grassy		20.661
ORMC146320	Poison Spring 5A	93-6062	LODE	07/20/1993	Calico Resources	Grassy		20.661
ORMC146321	Poison Spring 6A	93-6063	LODE	07/20/1993	Calico Resources	Grassy		20.661
ORMC146322	Poison Spring 7A	93-6064	LODE	07/18/1993	Calico Resources	Grassy		20.661
ORMC146323	Poison Spring 8A	93-6065	LODE	07/18/1993	Calico Resources	Grassy		20.661
ORMC146324	Poison Spring 9A	93-6066	LODE	07/19/1993	Calico Resources	Grassy		20.661
ORMC146325	Poison Spring 11A	93-6067	LODE	07/19/1993	Calico Resources	Grassy		20.661
ORMC146326	Poison Spring 14A	93-6068	LODE	07/18/1993	Calico Resources	Grassy		20.661
ORMC146327	Poison Spring 18A	93-6069	LODE	07/18/1993	Calico Resources	Grassy		20.661
ORMC146328	Poison Spring 22A	93-6070	LODE	07/18/1993	Calico Resources	Grassy		20.661
ORMC146329	Poison Spring 26A	93-6071	LODE	07/18/1993	Calico Resources	Grassy		20.661
ORMC146330	Poison Spring 27A	93-6072	LODE	07/19/1993	Calico Resources	Grassy		20.661
ORMC146331	Poison Spring 38A	93-6073	LODE	07/18/1993	Calico Resources	Grassy		20.661
ORMC167998	GM 5058	2011-3790	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC167999	GM 5059	2011-3791	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168000	GM 5060	2011-3792	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168001	GM 5061	2011-3793	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168002	GM 5062	2011-3794	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168003	GM 5063	2011-3795	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168004	GM 5064	2011-3796	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168005	GM 5065	2011-3797	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168006	GM 5066	2011-3798	LODE	09/17/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168007	GM 5067	2011-3799	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168008	GM 5068	2011-3800	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168009	GM 5069	2011-3801	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168010	GM 5070	2011-3802	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168011	GM 5071	2011-3803	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168012	GM 5072	2011-3804	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168013	GM 5150	2011-3805	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168014	GM 5151	2011-3806	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168015	GM 5152	2011-3807	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168016	GM 5153	2011-3808	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168017	GM 5154	2011-3809	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168018	GM 5155	2011-3810	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168019	GM 5156	2011-3811	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168020	GM 5157	2011-3812	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168021	GM 5158	2011-3813	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168022	GM 5159	2011-3814	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168023	GM 5160	2011-3815	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168024	GM 5161	2011-3816	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168025	GM 5162	2011-3817	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168026	GM 5163	2011-3818	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168027	GM 5164	2011-3819	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168028	GM 5165	2011-3820	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168029	GM 5166	2011-3821	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168030	GM 5167	2011-3822	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168031	GM 5168	2011-3823	LODE	09/17/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168032	GM 5169	2011-3824	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168033	GM 5170	2011-3825	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168034	GM 5171	2011-3826	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168035	GM 5172	2011-3827	LODE	09/17/2011	Calico Resources	Grassy		20.661
ORMC168036	GM 5250	2011-3828	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168037	GM 5251	2011-3829	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168038	GM 5252	2011-3830	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168039	GM 5253	2011-3831	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168040	GM 5254	2011-3832	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168041	GM 5255	2011-3833	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168042	GM 5256	2011-3834	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168043	GM5257	2011-3835	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168044	GM 5258	2011-3836	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168045	GM 5259	2011-3837	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168046	GM 5260	2011-3838	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168047	GM 5261	2011-3839	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168048	GM 5262	2011-3840	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168049	GM 5263	2011-3841	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168050	GM 5264	2011-3842	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168051	GM 5265	2011-3843	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168052	GM 5266	2011-3844	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168053	GM 5267	2011-3845	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168054	GM 5268	2011-3846	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168055	GM 5269	2011-3847	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168056	GM 5270	2011-3848	LODE	09/23/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168057	GM 5271	2011-3849	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168058	GM 5272	2011-3850	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168059	GM 5273	2011-3851	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168060	GM 5274	2011-3852	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168061	GM 5275	2011-3853	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168062	GM 5276	2011-3854	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168063	GM 5352	2011-3855	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168064	GM 5353	2011-3856	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168065	GM 5354	2011-3857	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168066	GM 5355	2011-3858	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168067	GM 5356	2011-3859	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168068	GM 5357	2011-3860	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168069	GM 5358	2011-3861	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168070	GM 5359	2011-3862	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168071	GM 5360	2011-3863	LODE	09/15/2011	Calico Resources	Grassy		20.661
ORMC168072	GM 5361	2011-3864	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168073	GM 5362	2011-3865	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168074	GM 5363	2011-3866	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168075	GM 5364	2011-3867	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168076	GM 5365	2011-3868	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168077	GM 5366	2011-3869	LODE	09/16/2011	Calico Resources	Grassy		20.661
ORMC168078	GM 5367	2011-3870	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168079	GM 5368	2011-3871	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168080	GM 5369	2011-3872	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168081	GM 5370	2011-3873	LODE	09/23/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168082	GM 5371	2011-3874	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168083	GM 5372	2011-3875	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168084	GM 5373	2011-3876	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168085	GM 5374	2011-3877	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168086	GM 5375	2011-3878	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168087	GM 5376	2011-3879	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168088	GM 5452	2011-3880	LODE	09/19/2011	Calico Resources	Grassy		20.661
ORMC168089	GM 5453	2011-3881	LODE	09/19/2011	Calico Resources	Grassy		20.661
ORMC168090	GM 5454	2011-3882	LODE	09/19/2011	Calico Resources	Grassy		20.661
ORMC168091	GM 5455	2011-3883	LODE	09/19/2011	Calico Resources	Grassy		20.661
ORMC168092	GM 5552	2011-3884	LODE	09/19/2011	Calico Resources	Grassy		20.661
ORMC168093	GM 5553	2011-3885	LODE	09/19/2011	Calico Resources	Grassy		20.661
ORMC168094	GM 5554	2011-3886	LODE	09/19/2011	Calico Resources	Grassy		20.661
ORMC168095	GM 5555	2011-3887	LODE	09/19/2011	Calico Resources	Grassy		20.661
ORMC168096	GM 5580	2011-3888	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168097	GM 5581	2011-3889	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168098	GM 5582	2011-3890	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168099	GM 5583	2011-3891	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168100	GM 5584	2011-3892	LODE	09/23/2011	Calico Resources	Grassy		20.661
ORMC168101	GM 5652	2011-3893	LODE	09/18/2011	Calico Resources	Grassy		20.661
ORMC168102	GM 5653	2011-3894	LODE	09/18/2011	Calico Resources	Grassy		20.661
ORMC168103	GM 5654	2011-3895	LODE	09/18/2011	Calico Resources	Grassy		20.661
ORMC168104	GM 5655	2011-3896	LODE	09/18/2011	Calico Resources	Grassy		20.661
ORMC168105	GM 5680	2011-3897	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168106	GM 5681	2011-3898	LODE	09/22/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168107	GM 5682	2011-3899	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168108	GM 5683	2011-3900	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168109	GM 5684	2011-3901	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168110	GM 5752	2011-3902	LODE	09/18/2011	Calico Resources	Grassy		20.661
ORMC168111	GM 5753	2011-3903	LODE	09/18/2011	Calico Resources	Grassy		20.661
ORMC168112	GM 5754	2011-3904	LODE	09/18/2011	Calico Resources	Grassy		20.661
ORMC168113	GM 5755	2011-3905	LODE	09/18/2011	Calico Resources	Grassy		20.661
ORMC168114	GM 5756	2011-3906	LODE	09/25/2011	Calico Resources	Grassy		20.661
ORMC168115	GM 5757	2011-3907	LODE	09/25/2011	Calico Resources	Grassy		20.661
ORMC168116	GM 5758	2011-3908	LODE	09/25/2011	Calico Resources	Grassy		20.661
ORMC168117	GM 5780	2011-3909	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168118	GM 5781	2011-3910	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168119	GM 5782	2011-3911	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168120	GM 5783	2011-3912	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168121	GM 5784	2011-3913	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168122	GM 5785	2011-3914	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168123	GM 5786	2011-3915	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168124	GM 5787	2011-3916	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168125	GM 5852	2011-3917	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168126	GM 5853	2011-3918	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168127	GM 5854	2011-3919	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168128	GM 5855	2011-3920	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168129	GM 5856	2011-3921	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168130	GM 5857	2011-3922	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168131	GM 5858	2011-3923	LODE	09/24/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168132	GM 5859	2011-3924	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168133	GM 5860	2011-3925	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168134	GM 5861	2011-3926	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168135	GM 5862	2011-3927	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168136	GM 5863	2011-3928	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168137	GM 5864	2011-3929	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168138	GM 5885	2011-3930	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168139	GM 5886	2011-3931	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168140	GM 5887	2011-3932	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168141	GM 5956	2011-3933	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168142	GM 5957	2011-3934	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168143	GM 5958	2011-3935	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168144	GM 5959	2011-3936	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168145	GM 5960	2011-3937	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168146	GM 5961	2011-3938	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168147	GM 5962	2011-3939	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168148	GM 5974	2011-3940	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168149	GM 5975	2011-3941	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168150	GM 5976	2011-3942	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168151	GM 5985	2011-3943	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168152	GM 5986	2011-3944	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168153	GM 5987	2011-3945	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168154	GM 6056	2011-3946	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168155	GM 6057	2011-3947	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168156	GM 6058	2011-3948	LODE	09/24/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168157	GM 6059	2011-3949	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168158	GM 6060	2011-3950	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168159	GM 6061	2011-3951	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168160	GM 6062	2011-3952	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168161	GM 6069	2011-3953	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168162	GM 6070	2011-3954	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168163	GM 6071	2011-3955	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168164	GM 6072	2011-3956	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168165	GM 6073	2011-3957	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168166	GM 6074	2011-3958	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168167	GM 6075	2011-3959	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168168	GM 6076	2011-3960	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168169	GM 6077	2011-3961	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168170	GM 6085	2011-3962	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168171	GM 6086	2011-3963	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168172	GM 6087	2011-3964	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168173	GM 6156	2011-3965	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168174	GM 6157	2011-3966	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168175	GM 6158	2011-3967	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168176	GM 6159	2011-3968	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168177	GM 6160	2011-3969	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168178	GM 6161	2011-3970	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168179	GM 6162	2011-3971	LODE	09/24/2011	Calico Resources	Grassy		20.661
ORMC168180	GM 6174	2011-3972	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168181	GM 6175	2011-3973	LODE	09/21/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168182	GM 6176	2011-3974	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168183	GM 6177	2011-3975	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168184	GM 6178	2011-3976	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168185	GM 6179	2011-3977	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168186	GM 6180	2011-3978	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168187	GM 6181	2011-3979	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168188	GM 6182	2011-3980	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168189	GM 6183	2011-3981	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168190	GM 6184	2011-3982	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168191	GM 6185	2011-3983	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168192	GM 6186	2011-3984	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168193	GM 6187	2011-3985	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168194	GM 6258	2011-3986	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168195	GM 6259	2011-3987	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168196	GM 6260	2011-3988	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168197	GM 6261	2011-3989	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168198	GM 6262	2011-3990	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168199	GM 6263	2011-3991	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168200	GM 6264	2011-3992	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168201	GM 6265	2011-3993	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168202	GM 6266	2011-3994	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168203	GM 6267	2011-3995	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168204	GM 6268	2011-3996	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168205	GM 6271	2011-3997	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168206	GM 6272	2011-3998	LODE	09/20/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168207	GM 6273	2011-3999	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168208	GM 6274	2011-4000	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168209	GM 6275	2011-4001	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168210	GM 6276	2011-4002	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168211	GM 6277	2011-4003	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168212	GM 6278	2011-4004	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168213	GM 6279	2011-4005	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168214	GM 6280	2011-4006	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168215	GM 6281	2011-4007	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168216	GM 6282	2011-4008	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168217	GM 6283	2011-4009	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168218	GM 6284	2011-4010	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168219	GM 6285	2011-4011	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168220	GM 6286	2011-4012	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168221	GM 6287	2011-4013	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168222	GM 6358	2011-4014	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168223	GM 6359	2011-4015	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168224	GM 6360	2011-4016	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168225	GM 6361	2011-4017	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168226	GM 6362	2011-4018	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168227	GM 6363	2011-4019	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168228	GM 6364	2011-4020	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168229	GM 6365	2011-4021	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168230	GM 6366	2011-4022	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168231	GM 6367	2011-4023	LODE	09/21/2011	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC168232	GM 6368	2011-4024	LODE	09/21/2011	Calico Resources	Grassy		20.661
ORMC168233	GM 6371	2011-4025	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168234	GM 6372	2011-4026	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168235	GM 6373	2011-4027	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168236	GM 6374	2011-4028	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168237	GM 6375	2011-4029	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168238	GM 6376	2011-4030	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168239	GM 6377	2011-4031	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168240	GM 6378	2011-4032	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168241	GM 6379	2011-4033	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168242	GM 6380	2011-4034	LODE	09/20/2011	Calico Resources	Grassy		20.661
ORMC168243	GM 6381	2011-4035	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168244	GM 6382	2011-4036	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168245	GM 6383	2011-4037	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168246	GM 6384	2011-4038	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168247	GM 6385	2011-4039	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168248	GM 6386	2011-4040	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC168249	GM 6387	2011-4041	LODE	09/22/2011	Calico Resources	Grassy		20.661
ORMC174048	PGM 1	2017-2062	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174049	PGM 2	2017-2063	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174050	PGM 3	2017-2064	LODE	03/31/2017	Calico Resources	Grassy		20.661
ORMC174051	PGM 4	2017-2065	LODE	03/30/2017	Calico Resources	Grassy		20.661
ORMC174052	PGM 5	2017-2066	LODE	03/30/2017	Calico Resources	Grassy		20.661
ORMC174053	PGM 6	2017-2067	LODE	03/31/2017	Calico Resources	Grassy		20.661
ORMC174054	PGM 7	2017-2068	LODE	03/31/2017	Calico Resources	Grassy		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC174055	PGM 8	2017-2069	LODE	03/31/2017	Calico Resources	Grassy		20.661
ORMC174056	PGM 9	2017-2070	LODE	03/31/2017	Calico Resources	Grassy		20.661
ORMC174057	PGM 10	2017-2071	LODE	03/30/2017	Calico Resources	Grassy		20.661
ORMC174058	PGM 11	2017-2072	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174059	PGM 12	2017-2073	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174060	PGM 13	2017-2074	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174061	PGM 14	2017-2075	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC174062	PGM 15	2017-2076	LODE	03/29/2017	Calico Resources	Grassy		20.661
ORMC176283	Ice 1	2018-4442	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176284	Ice 2	2018-4443	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176285	Ice 3	2018-4444	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176286	Ice 4	2018-4445	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176287	Ice 5	2018-4446	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176288	Ice 6	2018-4447	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176289	Ice 7	2018-4448	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176290	Ice 8	2018-4449	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176291	Ice 9	2018-4450	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176292	Ice 10	2018-4451	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176293	Ice 11	2018-4452	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176294	Ice 12	2018-4453	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176295	Ice 13	2018-4454	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176296	Ice 14	2018-4455	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176297	Ice 15	2018-4456	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176298	Ice 16	2018-4457	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176299	Ice 17	2018-4458	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176300	Ice 18	2018-4459	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176301	Ice 19	2018-4460	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176302	Ice 20	2018-4461	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176303	Ice 21	2018-4462	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176304	Ice 22	2018-4463	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176305	Ice 23	2018-4464	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176306	Ice 24	2018-4465	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176307	Ice 25	2018-4466	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176308	Ice 26	2018-4467	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176309	Ice 27	2018-4468	LODE	12/02/2018	Nevada Select	Frost		20.661
ORMC176310	Ice 28	2018-4469	LODE	12/02/2018	Nevada Select	Frost		20.661

Serial Number	Claim Name	County Number	Case Type	Location Date	Owner	Claims Group	Patent Number	Area (acres)
ORMC176311	Ice 29	2018-4470	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176312	Ice 30	2018-4471	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176313	Ice 31	2018-4472	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176314	Ice 32	2018-4473	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176315	Ice 33	2018-4474	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176316	Ice 34	2018-4475	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176317	Ice 35	2018-4476	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176318	Ice 36	2018-4477	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176319	Ice 37	2018-4478	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176320	Ice 38	2018-4479	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176321	Ice 39	2018-4480	LODE	12/03/2018	Nevada Select	Frost		20.661
ORMC176322	Ice 40	2018-4481	LODE	12/03/2018	Nevada Select	Frost		20.661